

## Plastic label - US-EMLP (17,5X15) - 0830839

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 17.5 x 15 mm, Number of individual labels: 45



### Your advantages

- ✓ The US-EMLP ... UniSheet labeling range includes self-adhesive device markers with good adhesive properties
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly, easily, and cost-effectively using the THERMOMARK CARD
- ✓ The perforated markers are easy to separate and can be easily fitted
- ✓ The sheets provide space for including function texts

### Key Commercial Data

Packing unit	10 pc
GTIN	 4 046356 894197
GTIN	4046356894197

### Technical data

#### Dimensions

Length (b)	15 mm
Width (a)	17.5 mm

#### Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C
Recommended storage conditions	23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.

#### General

Color	white
Components	Silicone-free
Flammability rating according to UL 94	V0
Material	PVC
RoHS compliant	Yes

## Plastic label - US-EMLP (17,5X15) - 0830839

### Technical data

#### General

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	45
Number of individual labels per row	5
Adhesive	Acrylic
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Result of weather resistance test	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result of wipe resistance test	Test passed
Foil strength	500 µm
Adhesive strength	50 µm
Marking mounting type	adhesive


#### Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V0

#### Drawings

# Plastic label - US-EMLP (17,5X15) - 0830839

Pictogram

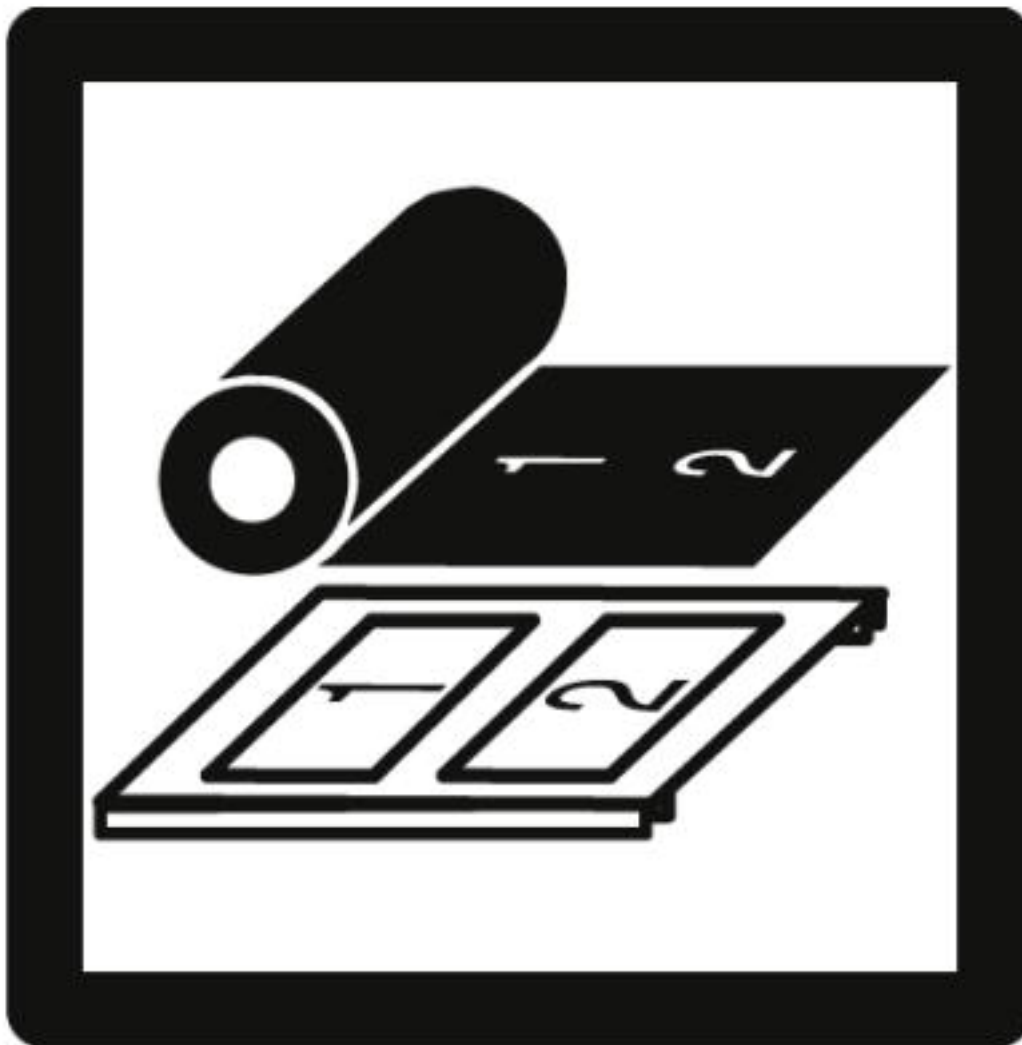

Approvals

Approvals

---

Approvals

CSA

---

Ex Approvals

---

Approval details

## Plastic label - US-EMLP (17,5X15) - 0830839

### Approvals

CSA



<http://www.csagroup.org/services-industries/product-listing/>

70191766

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>