


FINISHED LENGTH

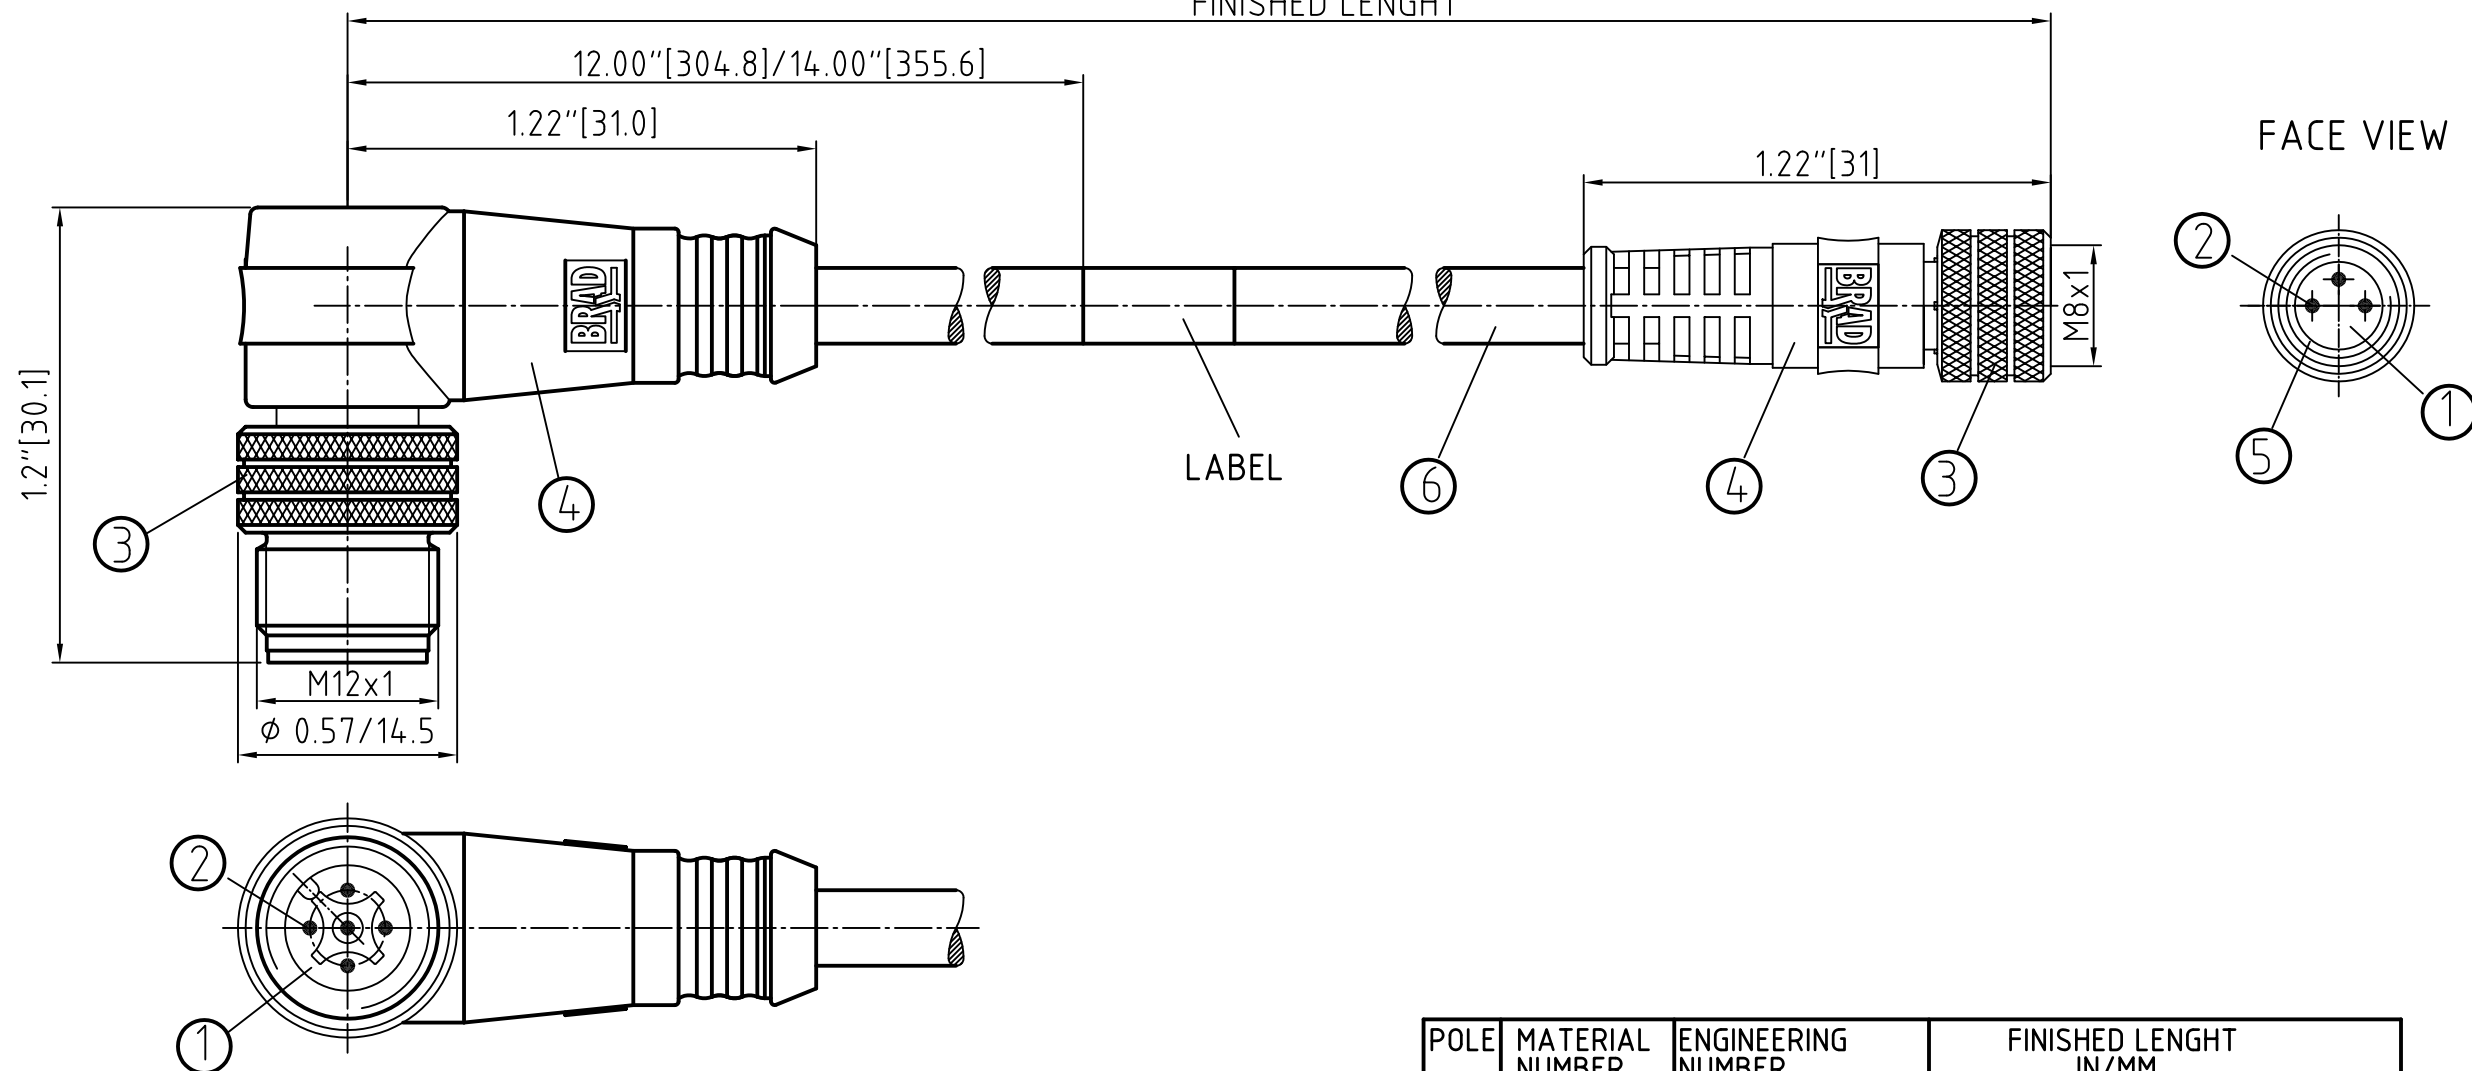

POLE	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH IN/MM
3	1200280670	483032E03M006	1.97' +1.75" -0 [0.6M +44.5 -0]
3	1200878051	483032E03M010	3.28' +2.19" -0 [1.0M +55.6 -0]
3	1200280739	483032E03M020	6.56' +3.50" -0 [2.0M +88.9 -0]
4	1200875038	484032E03M006	1.97' +1.75" -0 [0.6M +44.5 -0]
4	1200875039	484032E03M010	3.28' +2.19" -0 [1.0M +55.6 -0]

MALE FACE VIEW		FEMALE FACE VIEW	
3-POLE	4-POLE	3-POLE	4-POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	3-4POL:60V/AC 75V/DC
AMPERAGE RATING	3 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-30°C TO +80°C
UL CERTIFICATIONS	UL listed, File #E152210
CSA CERTIFICATIONS	CSA CERTIFIED, File LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	COUPLING NUT	BRASS	NICKEL PLATED
4	OVERMOLD	TPU	YELLOW
5	O-RING (FEMALE)	VITON	
6	CABLE 0.25mm ² /24AWG, (COPPER STRANDING) 3/4 CONDUCT. 300V	JACKET:PVC	BLACK

DESCRIPTION EC NO: WEU2010-0330 DRWN: REISSNER 2010/02/04 CHKD: FP APPR: NSTAUDIG 2010/02/11	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±---</td> <td>±.01</td> </tr> <tr> <td>1 PLACE</td> <td>±0.3</td> <td>±---</td> </tr> <tr> <td colspan="3">ANGULAR ± --- °</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±.01	1 PLACE	±0.3	±---	ANGULAR ± --- °			DIMENSION STYLE IN/MM DRAWN BY DATE REISSNER 2010/02/04 CHECKED BY DATE FP 2010/02/04 APPROVED BY DATE NSTAUDIG 2010/02/10	SCALE 2:1 DESIGN UNITS METRIC 	THIRD ANGLE PROJECTION NC/MIC 3/4P F/MM STR/90 AWG 24 PVC ---- MOLEX INCORPORATED MATERIAL NO. DOCUMENT NO. SHEET NO. SD-120087-021 1
		mm	INCH																				
	4 PLACES	±---	±---																				
	3 PLACES	±---	±---																				
2 PLACES	±---	±.01																					
1 PLACE	±0.3	±---																					
ANGULAR ± --- °																							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				
1	REV	SIZE A3																					