

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	ECR-15-007632	25MAY2015	DW	CW
	B	ECR-15-014907	14OCT2015	DL	CW
	B1	ECR-16-011987	08NOV2016	QY	CW
	C	ECR-21-108559	06AUG2021	BS	CW

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩 1.2Nm

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩 0.5Nm

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

TYPE 1, T2050462201-000, WITH TE LOGO
类型 1, T2050462201-000, TE LOGO

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购。
(订货号参考图面: T20300X20XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
	FINISH ±-
MATERIAL	-
	-

DWN	11 JUN 2014
David Wang	
CHK	11 JUN 2014
Chris Wang	
APVD	11 JUN 2014
Xiang Xu	
PRODUCT SPEC	108-106137
APPLICATION SPEC	114-106137
WEIGHT	-
Customer Drawing	

NAME		HEE-046-F	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	T2050462201000	-
SCALE	SHEET	OF	REV
1:1	1	2	C

1470-19 (3/13)

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

REVISIONS




© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

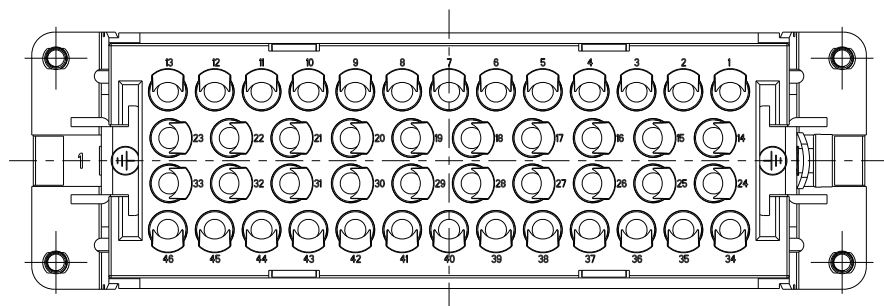


NOTE:
ALL SPEC REFER TO TYPE 1



注释:
所有产品规范参照 TYPE 1

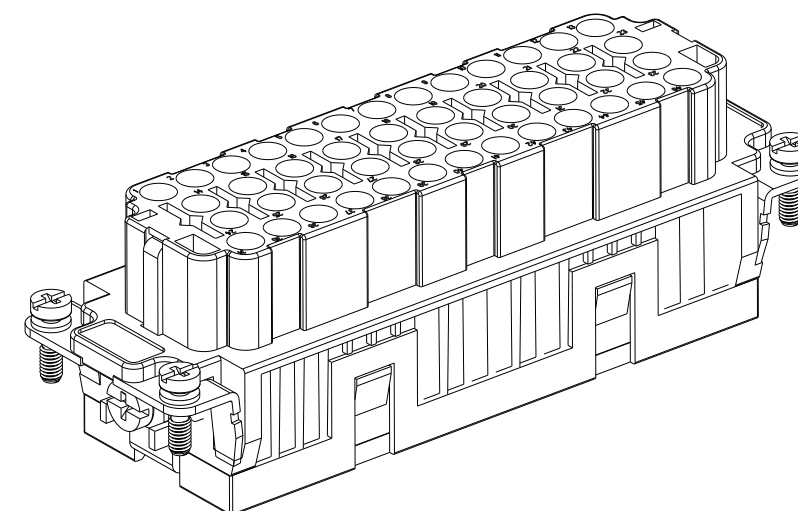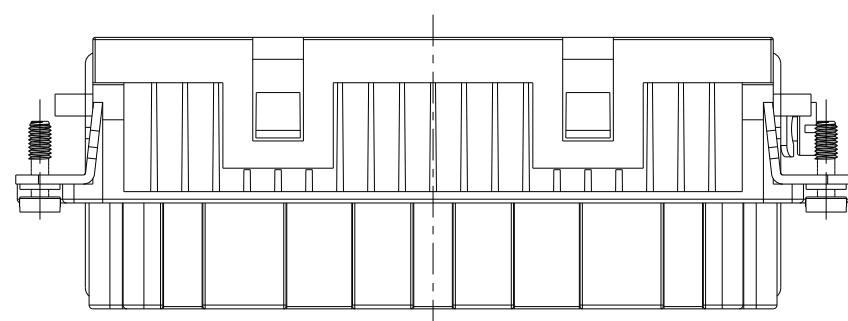

TYPE-2, T2050462201-002, WITH STAINLESS STEEL SCREW, WITHOUT LOGO
类型-2, T2050462201-002, 带不锈钢螺丝, 无LOGO

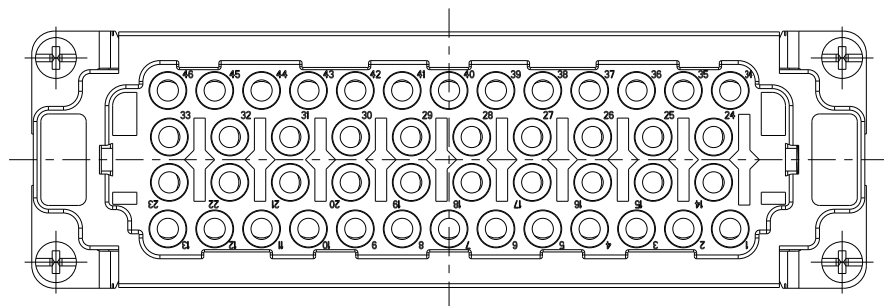

T2050462201-002	HEE-046-F	HEE-046 FEMALE INSERT, WITH STAINLESS STEEL SCREW, WITHOUT LOGO HEE-046 母插, 带不锈钢螺丝, 无LOGO	TYPE-2 类型-2
T2050462201-000	HEE-046-F	HEE-046 FEMALE INSERT HEE-046 母插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 11JUN2014	 TE Connectivity		
DIMENSIONS: mm		CHK Chris Wang 11JUN2014			NAME HEE-046-F
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang Xu 11JUN2014			PRODUCT SPEC 108-106137
		3 PLC ±-	APPLICATION SPEC 114-106137	SIZE A3	
MATERIAL -		4 PLC ±-	WEIGHT -	CAGE CODE 00779	
		ANGLES ±-	FINISH -	DRAWING NO T2050462201000	
				RESTRICTED TO -	
				SCALE 1:1	
				SHEET 2 OF 2	
				REV C	
				Customer Drawing	