

| | | Ŧ | ۵ | н т | m | | 0 |
|--|--|---|---|------------|---|--|---|
|--|--|---|---|------------|---|--|---|



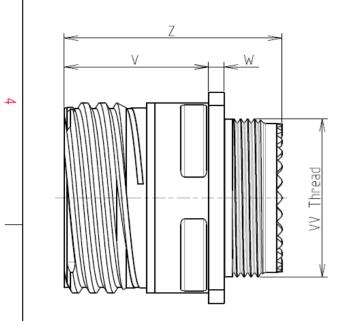



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 25

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Aluminium | | | |
|--|--|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | : -65°C to +175°C | | | |
| -Salt Spray | : 500 hours | | | |

8D 0


G

25

W

17

| Dim | Nominal |
|-----------|---------------|
| Р | 3.91±0.2 |
| PP | 6.15±0.2 |
| R1 | 38.1 |
| R2 | 34.93 |
| S | 46±0.3 |
| V | 20.07+0/-1.25 |
| W | 2.1/3.2 |
| Z | 31.5 Max |
| VV THREAD | M37x1-6g |

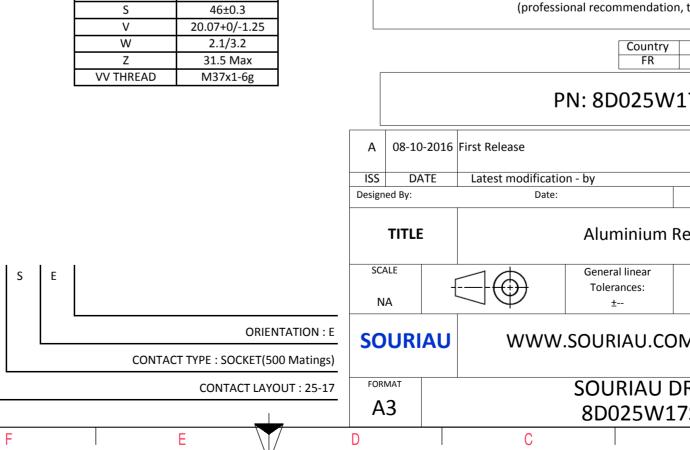

| C B > | | | | | | | | |
|---|------------------------------------|--|-------|----------------------------|--------------|---|--|--|
| | | | | | | 4 | | |
| LAYOUT SHOWN AS EXAMPLE | | | | | | 3 | | |
| SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D025W17SE | | | | | | | | |
| First Release | | | | | | | | |
| Date: | | | CUSTO | MER DRAWING | | | | |
| Aluminium Receptacle 8D series | | | | | | | | |
| $\exists \bigoplus$ | General linear Tolerances: ± | | NPR | DS / PROJECT 859 | | 1 | | |
| WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | | | | |
| | | | | | SHEET 1/2 | | | |
| C B A | | | | | J | | | |
| | | | | | | | | |

| r | т | ۵ | ار (| m | D | 0 |
|---|---|---|-----------------|---|------------------------|--|
| 4 | | 17 | | | <u>A</u> | Panel Cutou |
| | Ctc X A 0 B 5.69 C 8.36 D 9.52 E 14.25 G 9.52 H 8.36 | 36#22D 6#8 Triax 25-17 Y Ctc X Y 11.1 Y -6.02 -10.64 13.16 Z -12.24 0 11.66 a -6.02 10.64 5.71 b -3.5 6.17 1.52 c 0 5.08 -1.52 d 3.5 6.17 -5.71 e 4.59 2.54 -11.66 f 5.66 0 | | | ب ۲ | |
| ω | J 5.69 K 0 L -5.69 M -8.36 N -9.52 P -14.25 S -9.52 T -8.36 U -5.69 V 6.02 W 12.24 X 6.02 | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | | | Dim ØA ØAA R1 ØT |
| | \vdash | | | | | SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of |
| N | | | | | | (professional recommendat |
| | | | | | A 08-10-20 ISS DATE | PN: 8D025V |
| | | | | | Designed By: | Date: Aluminium General linear |
| | | | | | NA SOURIAI | Tolerances: |
| | | 1 | I | | FORMAT A3 | SOURIAU 8D025W |
| | Н | l G | F | E | D | C |

