




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00903	Connector, 4C audio jack, 3.5x7.0xL19.5 mm, brass, nickel plated, molding style	1	
2	30-00180	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00266	Overmold, audio jack, 3.5 mm, twist lock, TIC	1	PVC, white
4	Heat Shrink	Heat shrink tubing, white	1	
5	Heat shrink	Heat shrink tubing, black	1	Covers shield wire

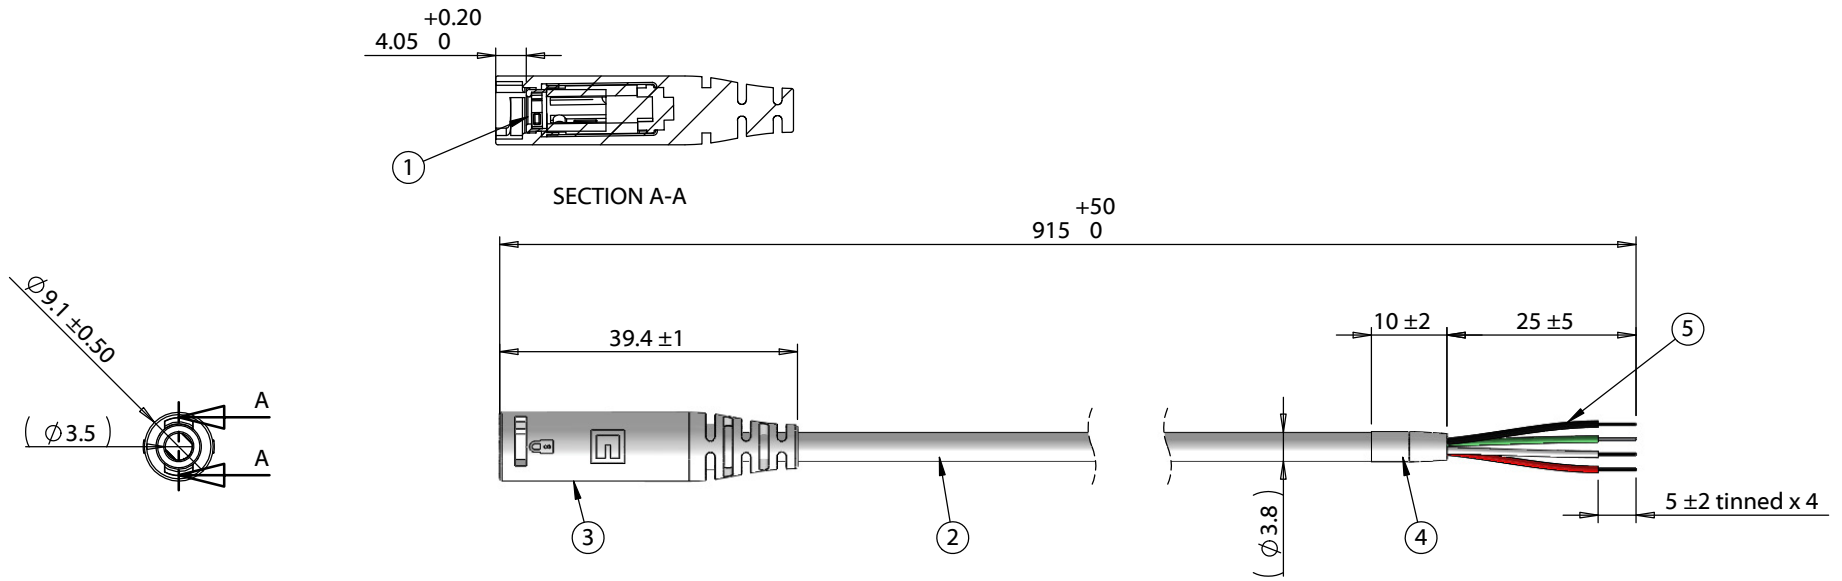

Wiring Diagram	
50-00903	wire color
A	red
B	white
C	green
D	shield/black

**Notes:**  
 Made to mate with cable assembly: 10-03403  
 Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	9/24/2019	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 915 mm, 3.5 mm 4C 50-00903 twist lock audio jack to 5 mm tinned, 28 AWG, 30-00180, white	Size: A Part number: 10-03404
					Scale: 1:1  Sheet 1 of 1

5

4

3

2

1