

■ Features

- Single output from 15-18W
- 100-240Vac Universal Input
- Certificates: UL, cUL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 80mV
- OVP, OCP, SCP, and Overload protection
- Efficiency Level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 65x42.5x25mm(exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ Application


- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ Model List

Custom Designs Available!

Model	Output Voltage	Output Current	Power	Certifications
WM018S-050-X-XX	5V	3A	15W	UL, cUL, CE
WM018S-060-X-XX	6V	3A	18W	UL, cUL, CE
WM018S-090-X-XX	9V	2A	18W	UL, cUL, CE
WM018S-120-X-XX	12V	1.5A	18W	UL, cUL, CE
WM018S-180-X-XX	18V	1A	18W	UL, cUL, CE
WM018S-240-X-XX	24V	0.75A	18W	UL, cUL, CE

■ Mechanical Diagram

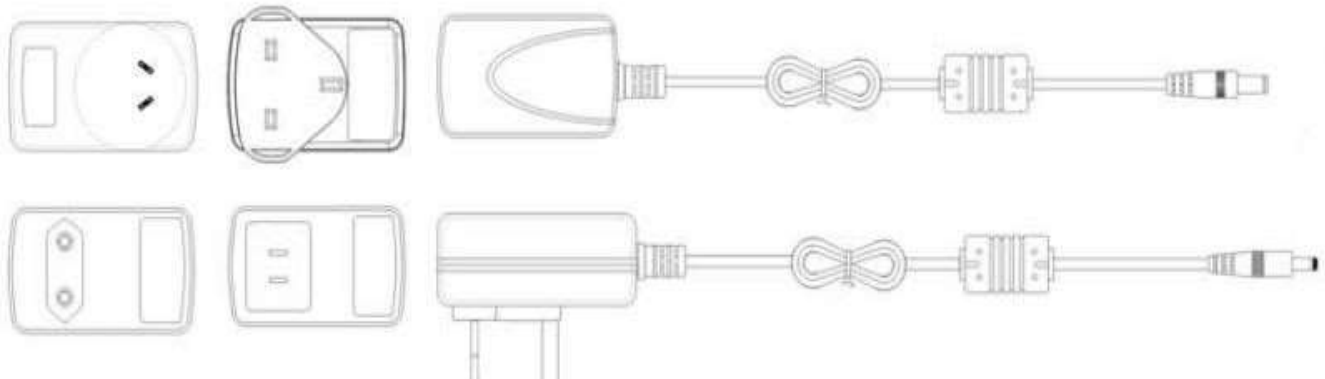

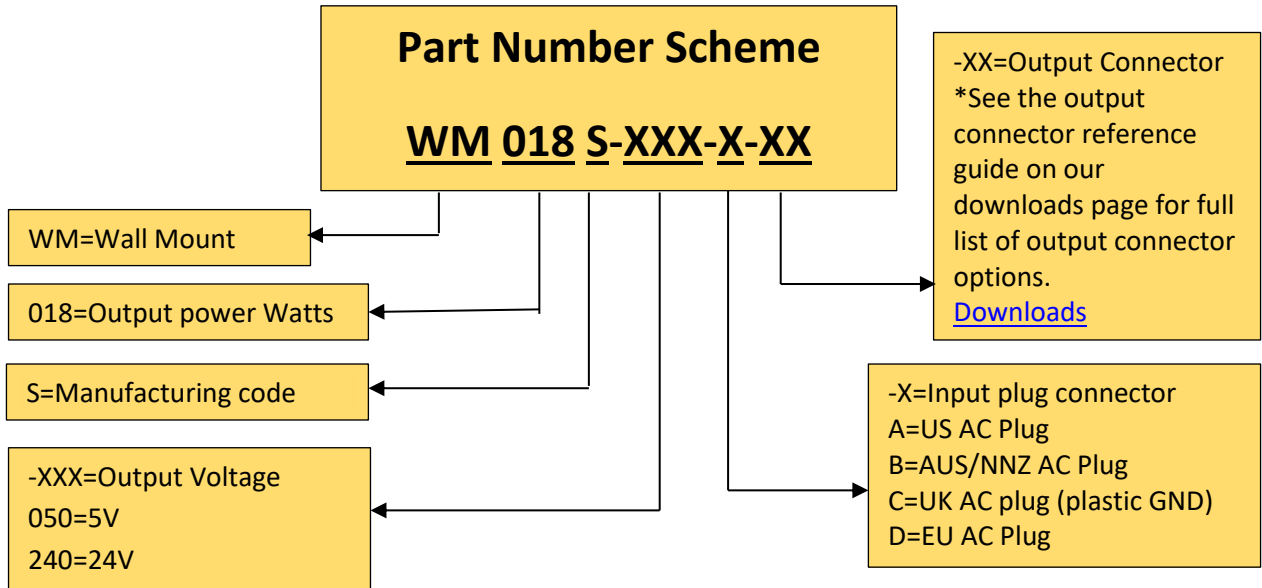

\*Product images are for illustrative purposes only and may vary from actual design.

\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.