

ITEM	PART#	DESCRIPTION	QTY	UOM
A	334812201	MX150 ASSY 1.5 BLD 1X2 BLK A/2	1	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	2	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

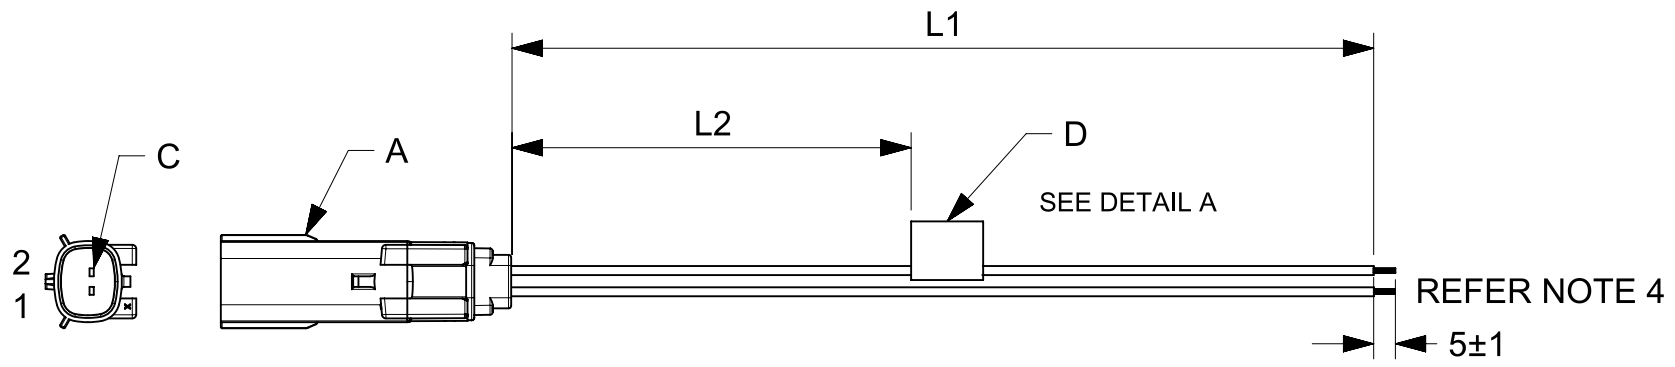


TABLE			
PART NUMBER	L1	L2	TITLE
2162831021	150±8	63 REF	MX150 P-S SR 2ckt 150mm Sn sealed cable
2162831022	300±10	138 REF	MX150 P-S SR 2ckt 300mm Sn sealed cable
2162831023	600±10	288 REF	MX150 P-S SR 2ckt 600mm Sn sealed cable

**NOTES**

1. Connector view shown is from mating side.
2. Label text must be 2mm max. in height with Arial font.
3. Label must be wrapped in flag type on a single cable.
4. The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 2.2mm max
5. Sealing should pass the IP67 rating as defined by product spec.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>
	DIMENSION UNITS	SCALE	EC NO: 717106		
mm	NTS	DRWN: SAIKIG 2022/05/23			
GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SKUMAR07 2022/09/14			
ANGULAR TOL ± °		APPR: SKUMAR07 2022/09/14		DOCUMENT NUMBER	
4 PLACES ±		INITIAL REVISION:		2162831021	
3 PLACES ±		DRWN: NNANKOLA 2020/06/29		PSD	
2 PLACES ±		APPR: SD 2020/08/31		000	
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		B	
0 PLACES ±		THIRD ANGLE PROJECTION		REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING		MATERIAL NUMBER	
		A4-SIZE		SEE TABLE	
		SERIES		CUSTOMER	
		216283		GENERAL MARKET	
				SHEET NUMBER	
				1 OF 1	