


1	2	3	4	5	6	7
A	B	C	D	E	F	G
A	B	C	D	E	F	G
B	C	D	E	F	G	H
C	D	E	F	G	H	H
D	E	F	G	H	H	H
E	F	G	H	H	H	H
F	G	H	H	H	H	H
G	H	H	H	H	H	H
H	H	H	H	H	H	H

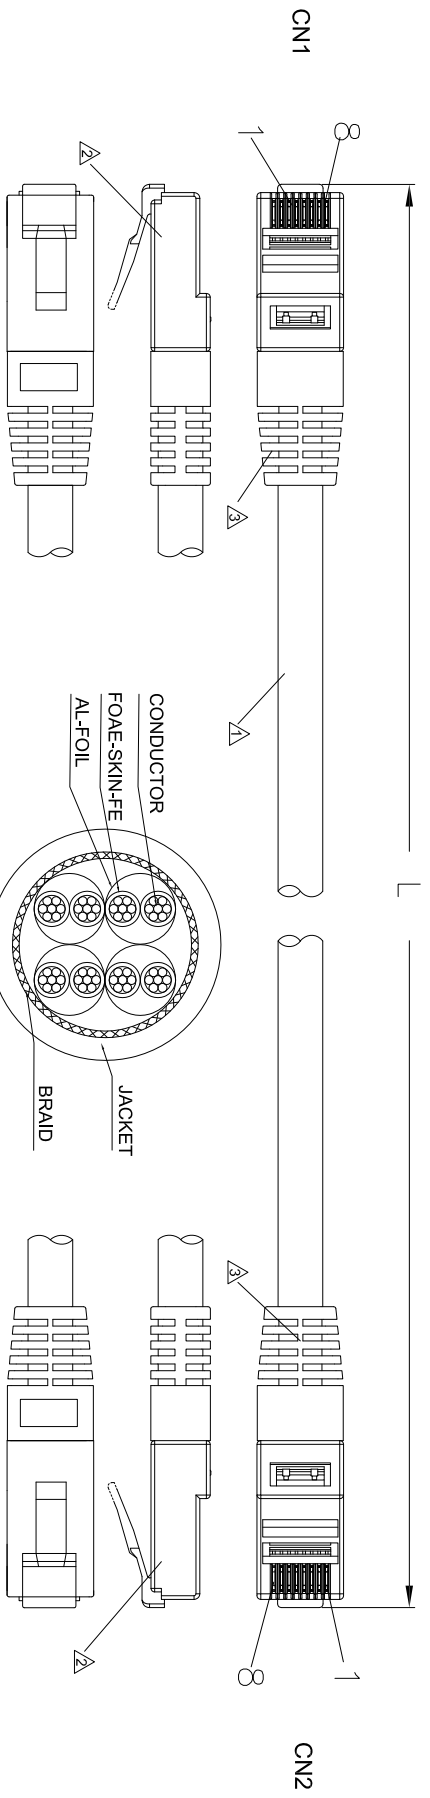

PIN OUT		
CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

② Tolerance

Length(meter)	Max-Δl	Min-Δl
0.5	+0.03	-0.025
1	+0.04	-0.035
2	+0.06	-0.06
3	+0.09	-0.09
5	+0.15	-0.15
7	+0.21	-0.21
10	+0.3	-0.3
15	+0.45	-0.45
20	+0.6	-0.6
30	+0.9	-0.9

① Order code: A-MC~~SS~~P60XXX/X
 order lengths in meter:
 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30

① Order code: A-MC~~SS~~P60XXX : color Grey
 order lengths in meter:
 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30

Electrical test:
 Open/Short/Intermittence: 100%

NO.	NAME.	QTTY	NO.	NAME.	QTTY
1	Molding PVC	2	Molding PVC 45P		
2	RJ45 CONN	2	RJ45 8P8C, Two Fork gold plated contacts 3u" with metal housing		
3	CABLE	1	CAT6 S/FTP(26AWG*1PR-A)*4+B+PVC OD:5.8±0.2mm		

SPECIFICATION

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		Drawn	Joanna	ASSMANN WSW-No. A-MC SS P60XXX/X
		Approved	Amy	Drawing-No. ASS 7542 CA
				Replace
DIM	TOL			rev03
				Sheet
Angle	TOL			

ROHS compliant
 Unit: mm



1 2 3 4 5 6 7