


Data sheet | Item number: 852-603

Industrial Managed Switch; 8-port 100Base-TX; 2-Slot 1000BASE-SX/LX;
PROFINET; Extended temperature range



www.wago.com/852-603

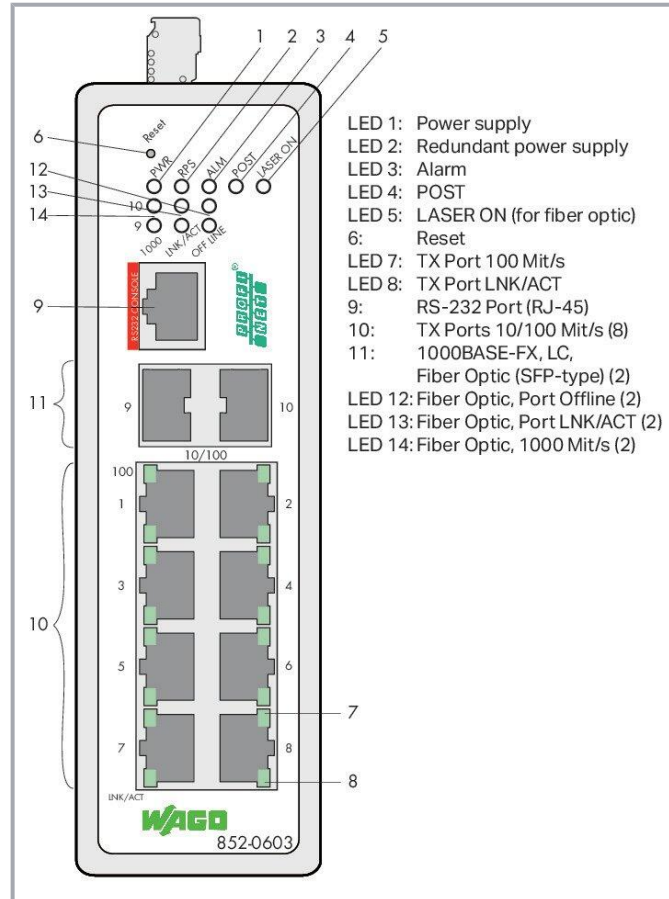

Item description

The configurable 852-603 Industrial Switch is a managed ETHERNET switch equipped with eight 10/100Base-TX copper ports and two SFP slots. It can be configured as a 100Base-FX or 1000Base-SX/LX device (SFP modules are optional).

Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring. The PROFINET certificate (conformity class B) guarantees easy integration into PROFINET automation systems using the device description file (GSD). In addition, the device supports the PROFINET Netload Class II.

The device supports flexible multi-port mirroring configuration via device description file or Web-Based Management. Function blocks allow cyclic PROFINET switch diagnostics to be efficiently implemented within the TIA Portal. An application note that outlines this process is available.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Features:

- Web-based/SNMP management
- Redundant DC power supply
- Power supply range: 12 ... 60 VDC
- DIP switches to set alarm functions
- Full compliance with IEEE802.3, 802.3u, 802.3z, 802.3x, 802.1d, 802.1w, 802.1s, 802.1Q, 802.1p standards
- Media redundancy protocol (MRP) as manager (MRM) or client (MRC), redundant ring
- Non-blocking, store-and-forward switching, rapid spanning tree protocol (RSTP)
- Autonegotiation and AUTO-MDI/MDIC (crossover)
- VLAN (802.1Q) VID
- IGMP snooping
- Port configuration, status, statistics
- Port trunking and multi-port mirroring
- SNMP v1/v2c/v3 and RMON
- Time synchronization via SNTP
- Storm control, bandwidth limitation and loop detection

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbit/s ports	8
Number of 1 Gbit/s SFP ports	2
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3z 1000BASE-SX/LX IEEE 802.3x Flow Control IEEE 802.1d Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1p Class of service IEEE 802.1ab Link Layer Discovery Protocol (LLDP) PROFINET Conformance Class B
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Media redundancy protocol as manager or client
Configuration options	DIP switch for signal contact Web-Based Management Command Line Interface SNMPv1/v2c/v3

Subject to changes. Please also observe the further product documentation!



Diagnostics	Signal contact; Port status; Port statistics; Port load; Traffic monitor; SFP information; Syslog; SNMP traps; PN diagnostics (cyclic and acyclic)
MAC table (size)	16000 addresses
Jumbo frame size	10000. Byte
Supply voltage	12 ... 60 VDC
Power consumption (max.)	12 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/100 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length;
VLAN	Port-based and tag-based (4k VIDs)
Indicators	Device: LED (PWR, RPS, POST) green: Power supply (primary), redundant power supply (secondary), POST function; LED (ALM) red: Alarm or PROFINET error (with active PROFINET mode); LED (LASER ON) yellow, LED (LNK/ACT, 100) green, LED (OFFLINE) red: Status of fiber optic ports; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 2 x SFP-slots (e.g., with SFP module and LC fiber-optic connector)
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical Data

Weight	885 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0.302 MJ

Commercial data




ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	box
Country of origin	TW
GTIN	4055143908030
Customs tariff number	85176200000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02.B.00087/19
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Subject to changes. Please also observe the further product documentation!




Protocol and fieldbus specific certificates

Logo	Approval	Additional Approval Text	Certificate name
	Profi-Net Siemens AG/ComDeC	-	Z12463

Optional accessories








Interface module

Interface module

	Item no.: 289-195 Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection	www.wago.com/289-195
---	--	--

Cables and pluggable connectors





Connector plug

	Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976
	Item no.: 750-978/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	www.wago.com/750-978/000-012
	Item no.: 750-979/000-012 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	www.wago.com/750-979/000-012
	Item no.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief	www.wago.com/750-978/000-021
	Item no.: 750-979/000-022 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief	www.wago.com/750-979/000-022
	Item no.: 750-978/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief	www.wago.com/750-978/000-022
	Item no.: 750-979/000-011 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	www.wago.com/750-979/000-011




Subject to changes. Please also observe the further product documentation!

	<p>Item no.: 750-979/000-013 Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief</p>	<p>www.wago.com/750-979/000-013</p>
	<p>Item no.: 750-979/000-021 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief</p>	<p>www.wago.com/750-979/000-021</p>
	<p>Item no.: 750-977/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22</p>	<p>www.wago.com/750-977/000-011</p>
	<p>Item no.: 750-978/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief</p>	<p>www.wago.com/750-978/000-013</p>
	<p>Item no.: 750-978/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief</p>	<p>www.wago.com/750-978/000-011</p>
	<p>Item no.: 750-977/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24</p>	<p>www.wago.com/750-977/000-022</p>
	<p>Item no.: 750-977/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22</p>	<p>www.wago.com/750-977/000-012</p>
	<p>Item no.: 750-977/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22</p>	<p>www.wago.com/750-977/000-013</p>
	<p>Item no.: 750-977/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24</p>	<p>www.wago.com/750-977/000-021</p>






Power supplies

Power supply unit		
	<p>Item no.: 787-1632 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact</p>	<p>www.wago.com/787-1632</p>
	<p>Item no.: 787-1633 Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact</p>	<p>www.wago.com/787-1633</p>
	<p>Item no.: 787-1635 Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact</p>	<p>www.wago.com/787-1635</p>
	<p>Item no.: 787-1602 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal</p>	<p>www.wago.com/787-1602</p>
	<p>Item no.: 787-1622</p>	

Subject to changes. Please also observe the further product documentation!

	Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact	www.wago.com/787-1622
	Item no.: 787-1606 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal	www.wago.com/787-1606
	Item no.: 787-1623 Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal	www.wago.com/787-1623

Plugs

SFP module		
	Item no.: 852-1200 SFP Module 1000BASE; SX Multi-Mode 850 nm LC; 0.55 km; Extended temperature range; DDM; silver-colored	www.wago.com/852-1200
	Item no.: 852-1210 SFP Module 1000BASE; LX Single-Mode 1310 nm LC; 10 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored	www.wago.com/852-1210
	Item no.: 852-1280 SFP Module 1000BASE; ZX Single-Mode 1550 nm LC; 80 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored	www.wago.com/852-1280
	Item no.: 852-201/107-002 SFP Module 100BASE; FX Multi-Mode 1310 nm LC; 2 km; silver-colored	www.wago.com/852-201/107-002
	Item no.: 852-201/107-030 SFP Module 100BASE; LX Single-Mode 1310 nm LC; 30 km; silver-colored	www.wago.com/852-201/107-030

Downloads

Documentation

Manual

Product Manual Industrial Managed Switch 8 Ports 100BASE-TX, 2 x 1000BASE-SX/LX	V 1.0.0 2019 Dec 12	pdf 16.8 MB	Download
--	------------------------	----------------	----------

Bid Text

852-603 X81 - Datei		xml 8.3 kB	Download
852-603 docx - Datei		docx 18.1 kB	Download

Additional Information

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

System Description

Industrial Switches – General Product Information		pdf 1.9 MB	Download
---	--	---------------	----------

Runtime Software**Firmware**

0852-0603, Industrial-Managed-Switch WAGO_FW0852-0603_V010003_IX02_F	V 02 2021 Jul 21	zip 9.0 MB	Download
---	---------------------	---------------	----------

CAD/CAE-Data**CAE data**

ZUKEN Portal 852-603		URL	Download
----------------------	--	-----	----------

EPLAN Data Portal 852-603		URL	Download
---------------------------	--	-----	----------

CAD data

2D/3D Models 852-603		URL	Download
----------------------	--	-----	----------

Device Files**Device Description File**

750-916; GSD files of version 2.x for PROFINET/ series 750/753, 765, 767 and 852	3.0 2023 Jan 15	zip 2.6 MB	Download
--	--------------------	---------------	----------

GSD-Dateien der Version 2.x für PROFINET	2.33 2019 Jul 9	zip 44.1 kB	Download
--	--------------------	----------------	----------

Environmental Product Compliance**Compliance Search**

Environmental Product Compliance 852-603		URL	Download
--	--	-----	----------

Subject to changes. Please also observe the further product documentation!

Data sheet | Item number: 852-603

www.wago.com/852-603



Industrial Managed Switch; 8-port 100Base-TX; 2-Slot 1000BASE-SX/LX; PROFINET;
Extended temperature range

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.