

- NOTES:**
1. ADJUSTABLE HEIGHT: MAXIMUM 6.25 FT
 2. RECOMENDED LENGTH: 3 FT RADIUS
 3. LAMP ASSEMBLY REQUIRES 300 WATT HALOGEN BULBS DOUBLE ENDED T3Q
 4. FINISH PRODUCT WILL BE PACK IN CORRUGATED CARDBOARD BOX

SEE NOTE 1



SEE NOTE 2

CABLE TYPE AND LENGTH ON PRIMARY SIDE OF MOLDED "T" SEE ENGINEERING TABLE

HAZARDOUS LOCATION PLUG SEE ENGINEERING TABLE

CASE FOR TWO HEAD LIGHT ASSEMBLY AND T-BAR ASSY. (SEE NOTE 4)

BAG FOR TRIPOD ASSEMBLY (SEE NOTE 4)

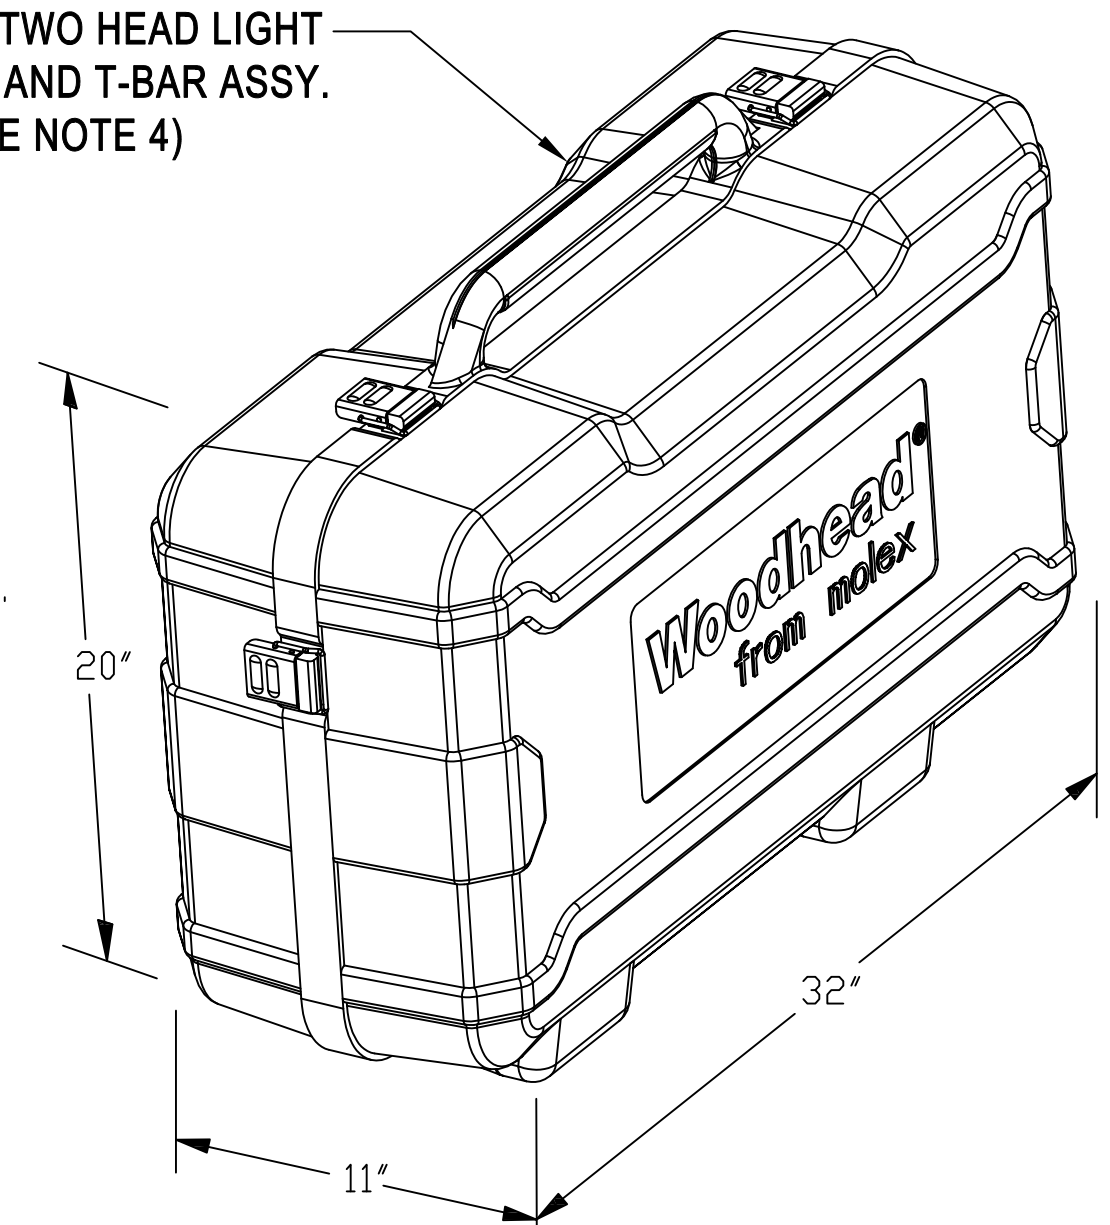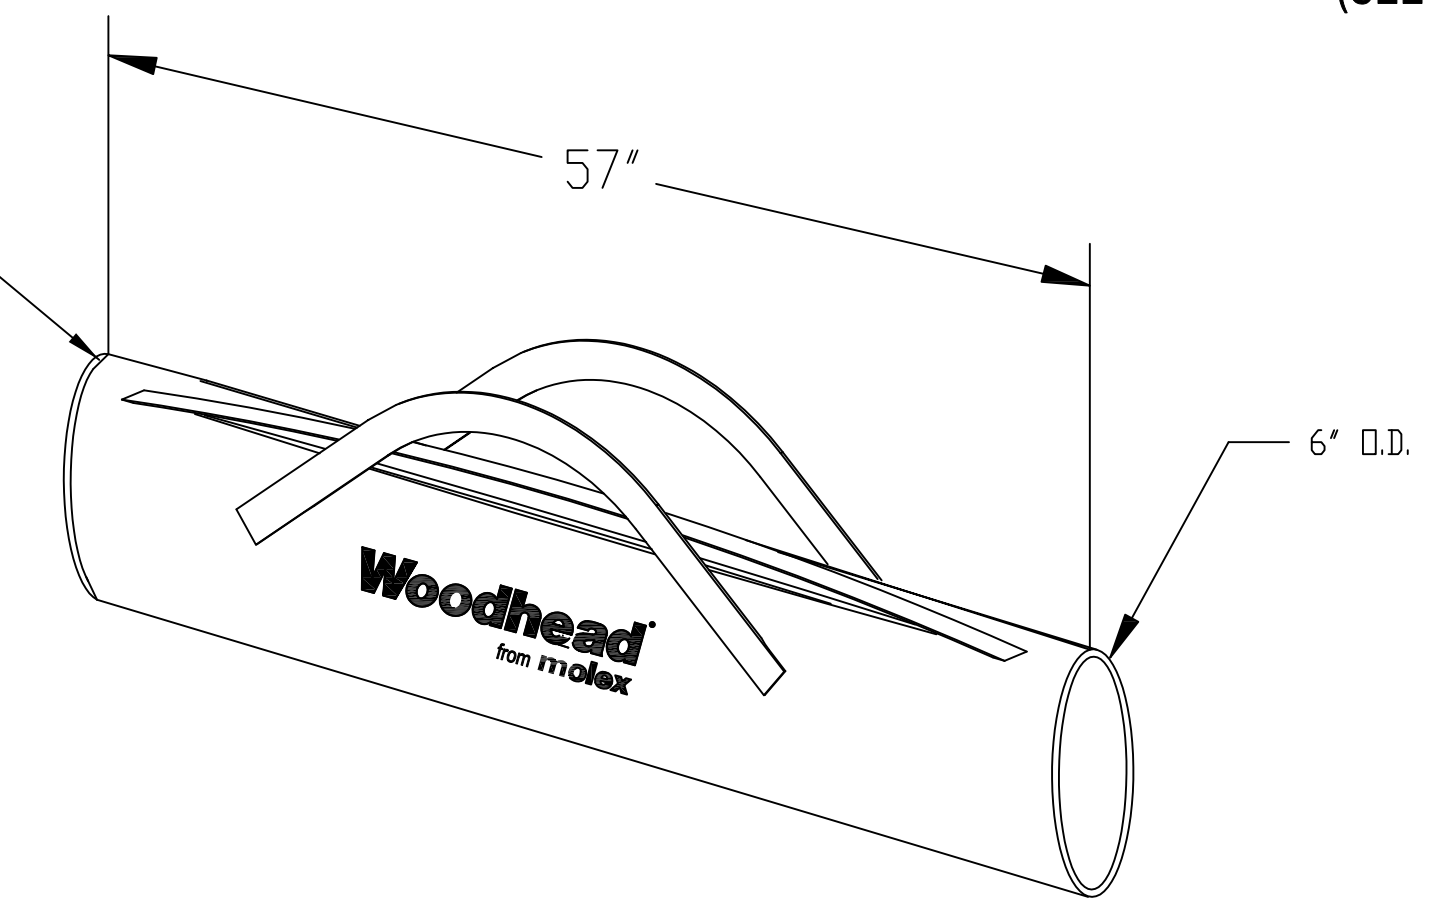

ENGINEERING TABLE




ORDERING SERIES	ENGINEERING BASE PART NUMBER	WHERE										
130289	S2300-HZAXXX###	A	XXX	###								
		<table border="1"> <tr> <td colspan="2">"A" DENOTES PLUG STYLE</td> </tr> <tr> <td>X</td> <td>EXPLOSION PROOF NEMA 15A</td> </tr> <tr> <td>Y</td> <td>EXPLOSION PROOF NEMA 20A</td> </tr> <tr> <td>N</td> <td>NO PLUG OR FLYING LEADS</td> </tr> </table>			"A" DENOTES PLUG STYLE		X	EXPLOSION PROOF NEMA 15A	Y	EXPLOSION PROOF NEMA 20A	N	NO PLUG OR FLYING LEADS
"A" DENOTES PLUG STYLE												
X	EXPLOSION PROOF NEMA 15A											
Y	EXPLOSION PROOF NEMA 20A											
N	NO PLUG OR FLYING LEADS											
		<table border="1"> <tr> <td colspan="2">"XXX" DENOTES CABLE LENGTH ON PRIMARY SIDE OF MOLDED "T"</td> </tr> <tr> <td>025</td> <td>25 ft.</td> </tr> <tr> <td>050</td> <td>50 ft.</td> </tr> </table>			"XXX" DENOTES CABLE LENGTH ON PRIMARY SIDE OF MOLDED "T"		025	25 ft.	050	50 ft.		
"XXX" DENOTES CABLE LENGTH ON PRIMARY SIDE OF MOLDED "T"												
025	25 ft.											
050	50 ft.											
		<table border="1"> <tr> <td colspan="2">"###" DENOTES CABLE TYPE ON PRIMARY SIDE OF MOLDED "T"</td> </tr> <tr> <td>163</td> <td>#16 GAUGE, 3 CONDUCTOR</td> </tr> <tr> <td>143</td> <td>#14 GAUGE, 3 CONDUCTOR</td> </tr> <tr> <td>123</td> <td>#12 GAUGE, 3 CONDUCTOR</td> </tr> </table>			"###" DENOTES CABLE TYPE ON PRIMARY SIDE OF MOLDED "T"		163	#16 GAUGE, 3 CONDUCTOR	143	#14 GAUGE, 3 CONDUCTOR	123	#12 GAUGE, 3 CONDUCTOR
"###" DENOTES CABLE TYPE ON PRIMARY SIDE OF MOLDED "T"												
163	#16 GAUGE, 3 CONDUCTOR											
143	#14 GAUGE, 3 CONDUCTOR											
123	#12 GAUGE, 3 CONDUCTOR											

ENGINEERING NO.	MATERIAL NO.	PLUG	CABLE LENGTH	CABLE TYPE
S2300-HZX025163	1302890001	X	25 FT	#16/3 SOOW
S2300-HZX050163	1302890002	X	50 FT	#16/3 SOOW
S2300-HZN025163	1302890003	N	25 FT	#16/3 SOOW
S2300-HZN050163	1302890004	N	50 FT	#16/3 SOOW

ADD ENG. TABLE & SHEET 2 EC NO: WNA2010-0311 DRWN: MCHOJECK 11/5/09 CHKD: --- APPR: DTITUS 2010/01/04	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION																																				
	$\nabla=0$ $\sphericalangle=0$	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>±----</td> <td>±----</td> </tr> <tr> <td>3 PLACES</td> <td>±----</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±----</td> <td>±.020</td> </tr> <tr> <td>1 PLACE</td> <td>±----</td> <td>±.010</td> </tr> </table>		mm	INCH	4 PLACES	±----	±----	3 PLACES	±----	±.005	2 PLACES	±----	±.020	1 PLACE	±----	±.010	<table border="1"> <tr> <th>DRAWN BY</th> <th>DATE</th> </tr> <tr> <td>MC</td> <td>2009/01/23</td> </tr> <tr> <th>CHECKED BY</th> <th>DATE</th> </tr> <tr> <td>DT</td> <td>2009/01/23</td> </tr> <tr> <th>APPROVED BY</th> <th>DATE</th> </tr> <tr> <td>DTITUS</td> <td>2009/12/04</td> </tr> </table>	DRAWN BY	DATE	MC	2009/01/23	CHECKED BY	DATE	DT	2009/01/23	APPROVED BY	DATE	DTITUS	2009/12/04	<table border="1"> <tr> <th>TITLE</th> </tr> <tr> <td>HAZARDOUS LOCATION STANCHION LIGHT</td> </tr> </table>	TITLE	HAZARDOUS LOCATION STANCHION LIGHT	<table border="1"> <tr> <th>INCH</th> </tr> <tr> <td>NTS</td> </tr> </table>	INCH	NTS	<table border="1"> <tr> <th>INCH</th> </tr> <tr> <td>----</td> </tr> </table>	INCH	----	<table border="1"> <tr> <th>THIRD ANGLE PROJECTION</th> </tr> <tr> <td>----</td> </tr> </table>	THIRD ANGLE PROJECTION	----
		mm	INCH																																							
	4 PLACES	±----	±----																																							
3 PLACES	±----	±.005																																								
2 PLACES	±----	±.020																																								
1 PLACE	±----	±.010																																								
DRAWN BY	DATE																																									
MC	2009/01/23																																									
CHECKED BY	DATE																																									
DT	2009/01/23																																									
APPROVED BY	DATE																																									
DTITUS	2009/12/04																																									
TITLE																																										
HAZARDOUS LOCATION STANCHION LIGHT																																										
INCH																																										
NTS																																										
INCH																																										

THIRD ANGLE PROJECTION																																										

	ANGULAR ±1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.	DOCUMENT NO.	SHEET NO.																																					
			SEE TABLE	SD-130289-001	1 OF 2																																					
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																							

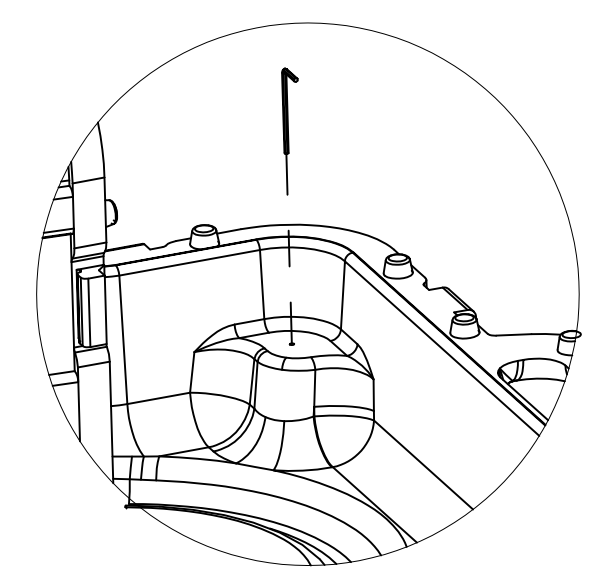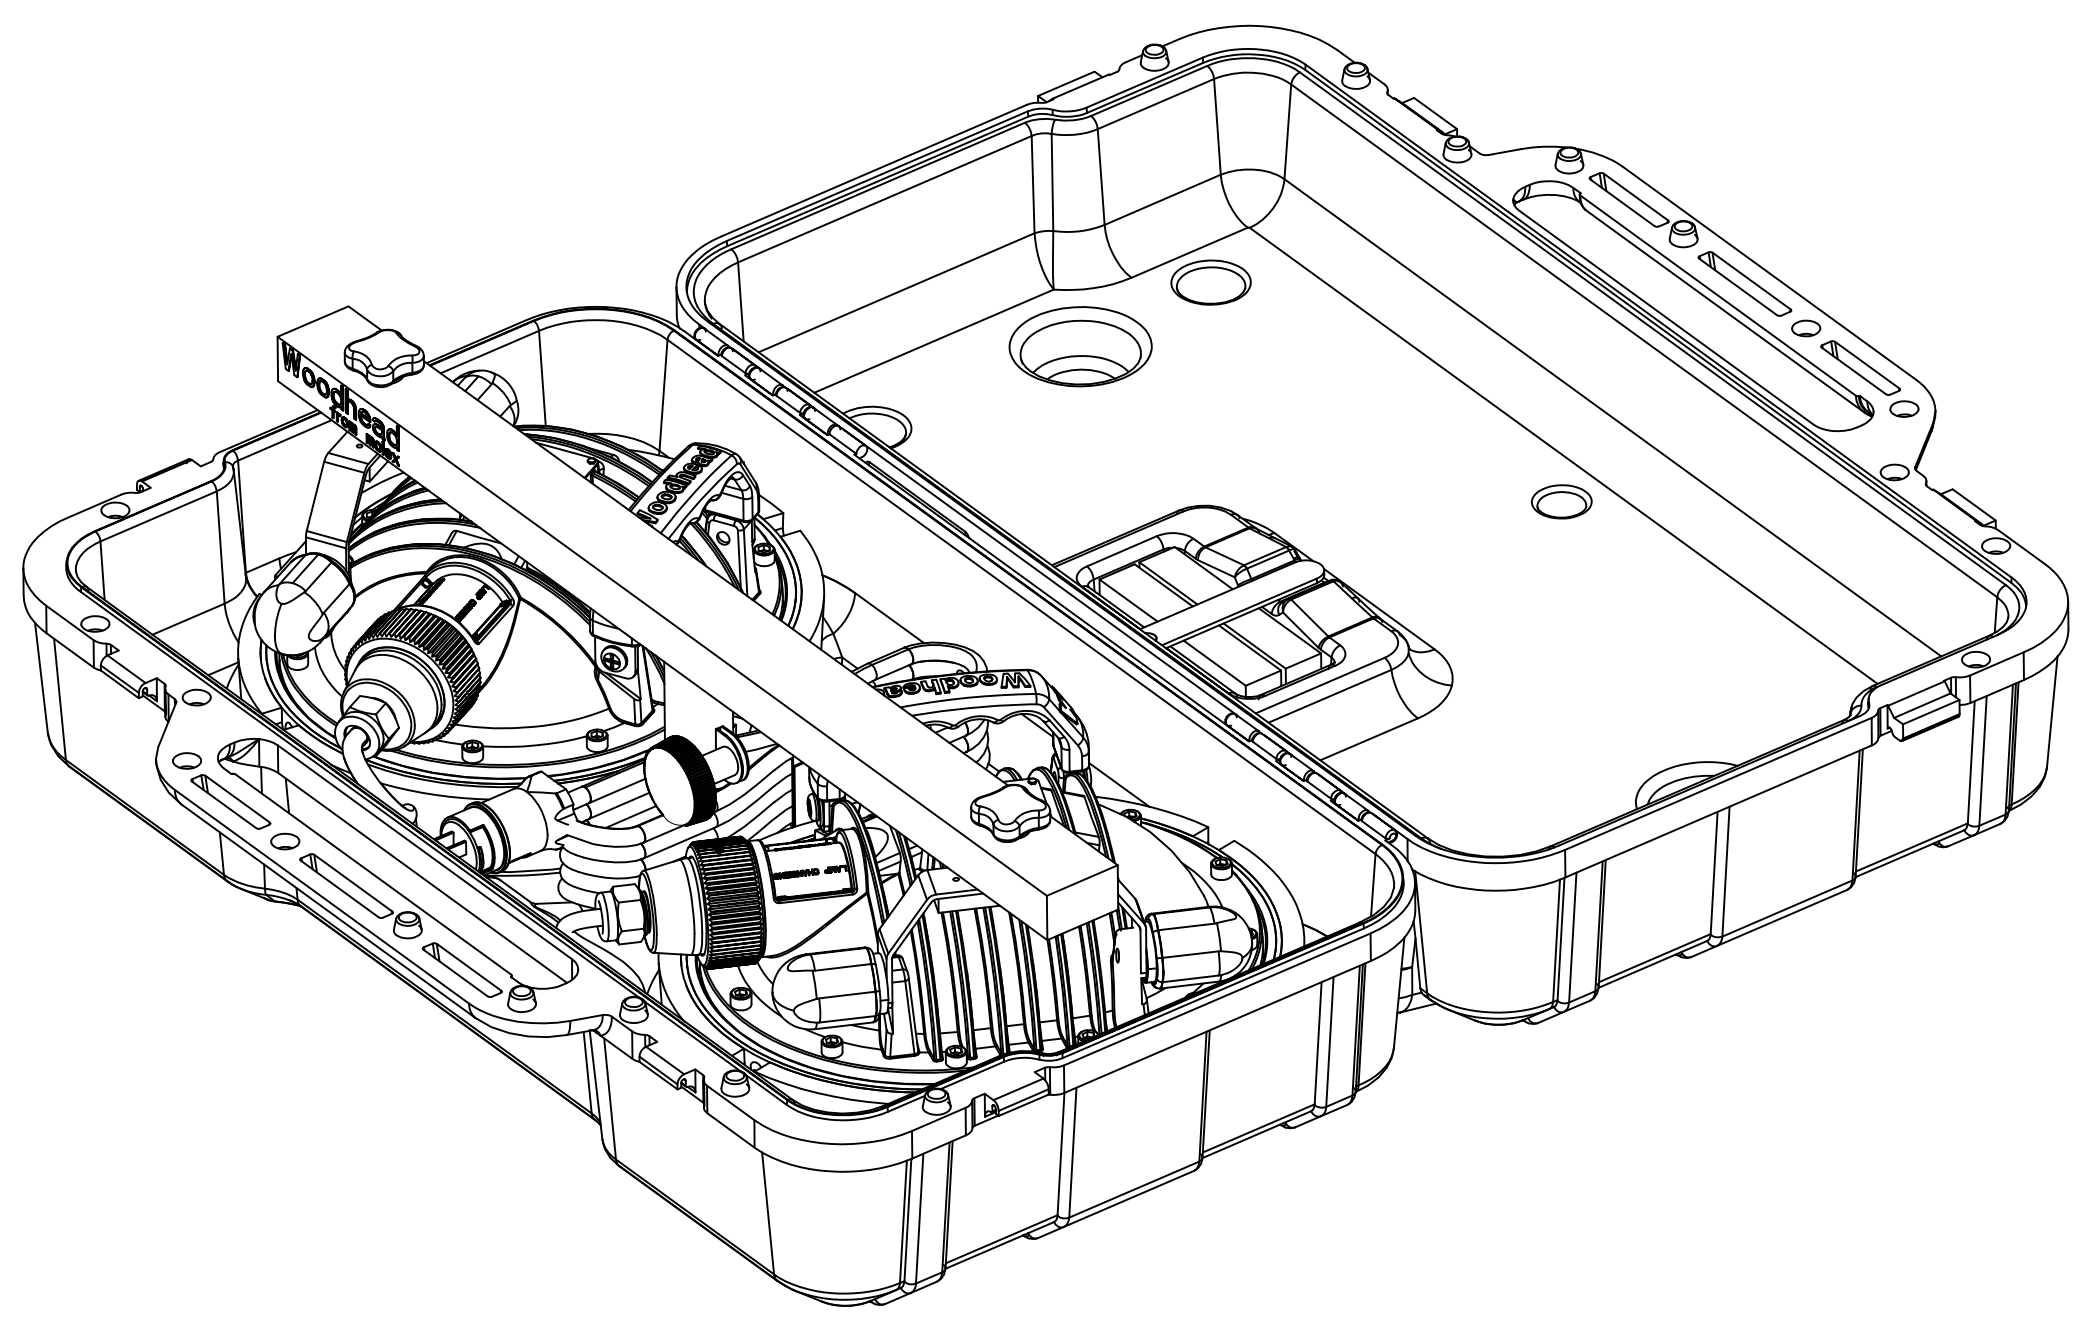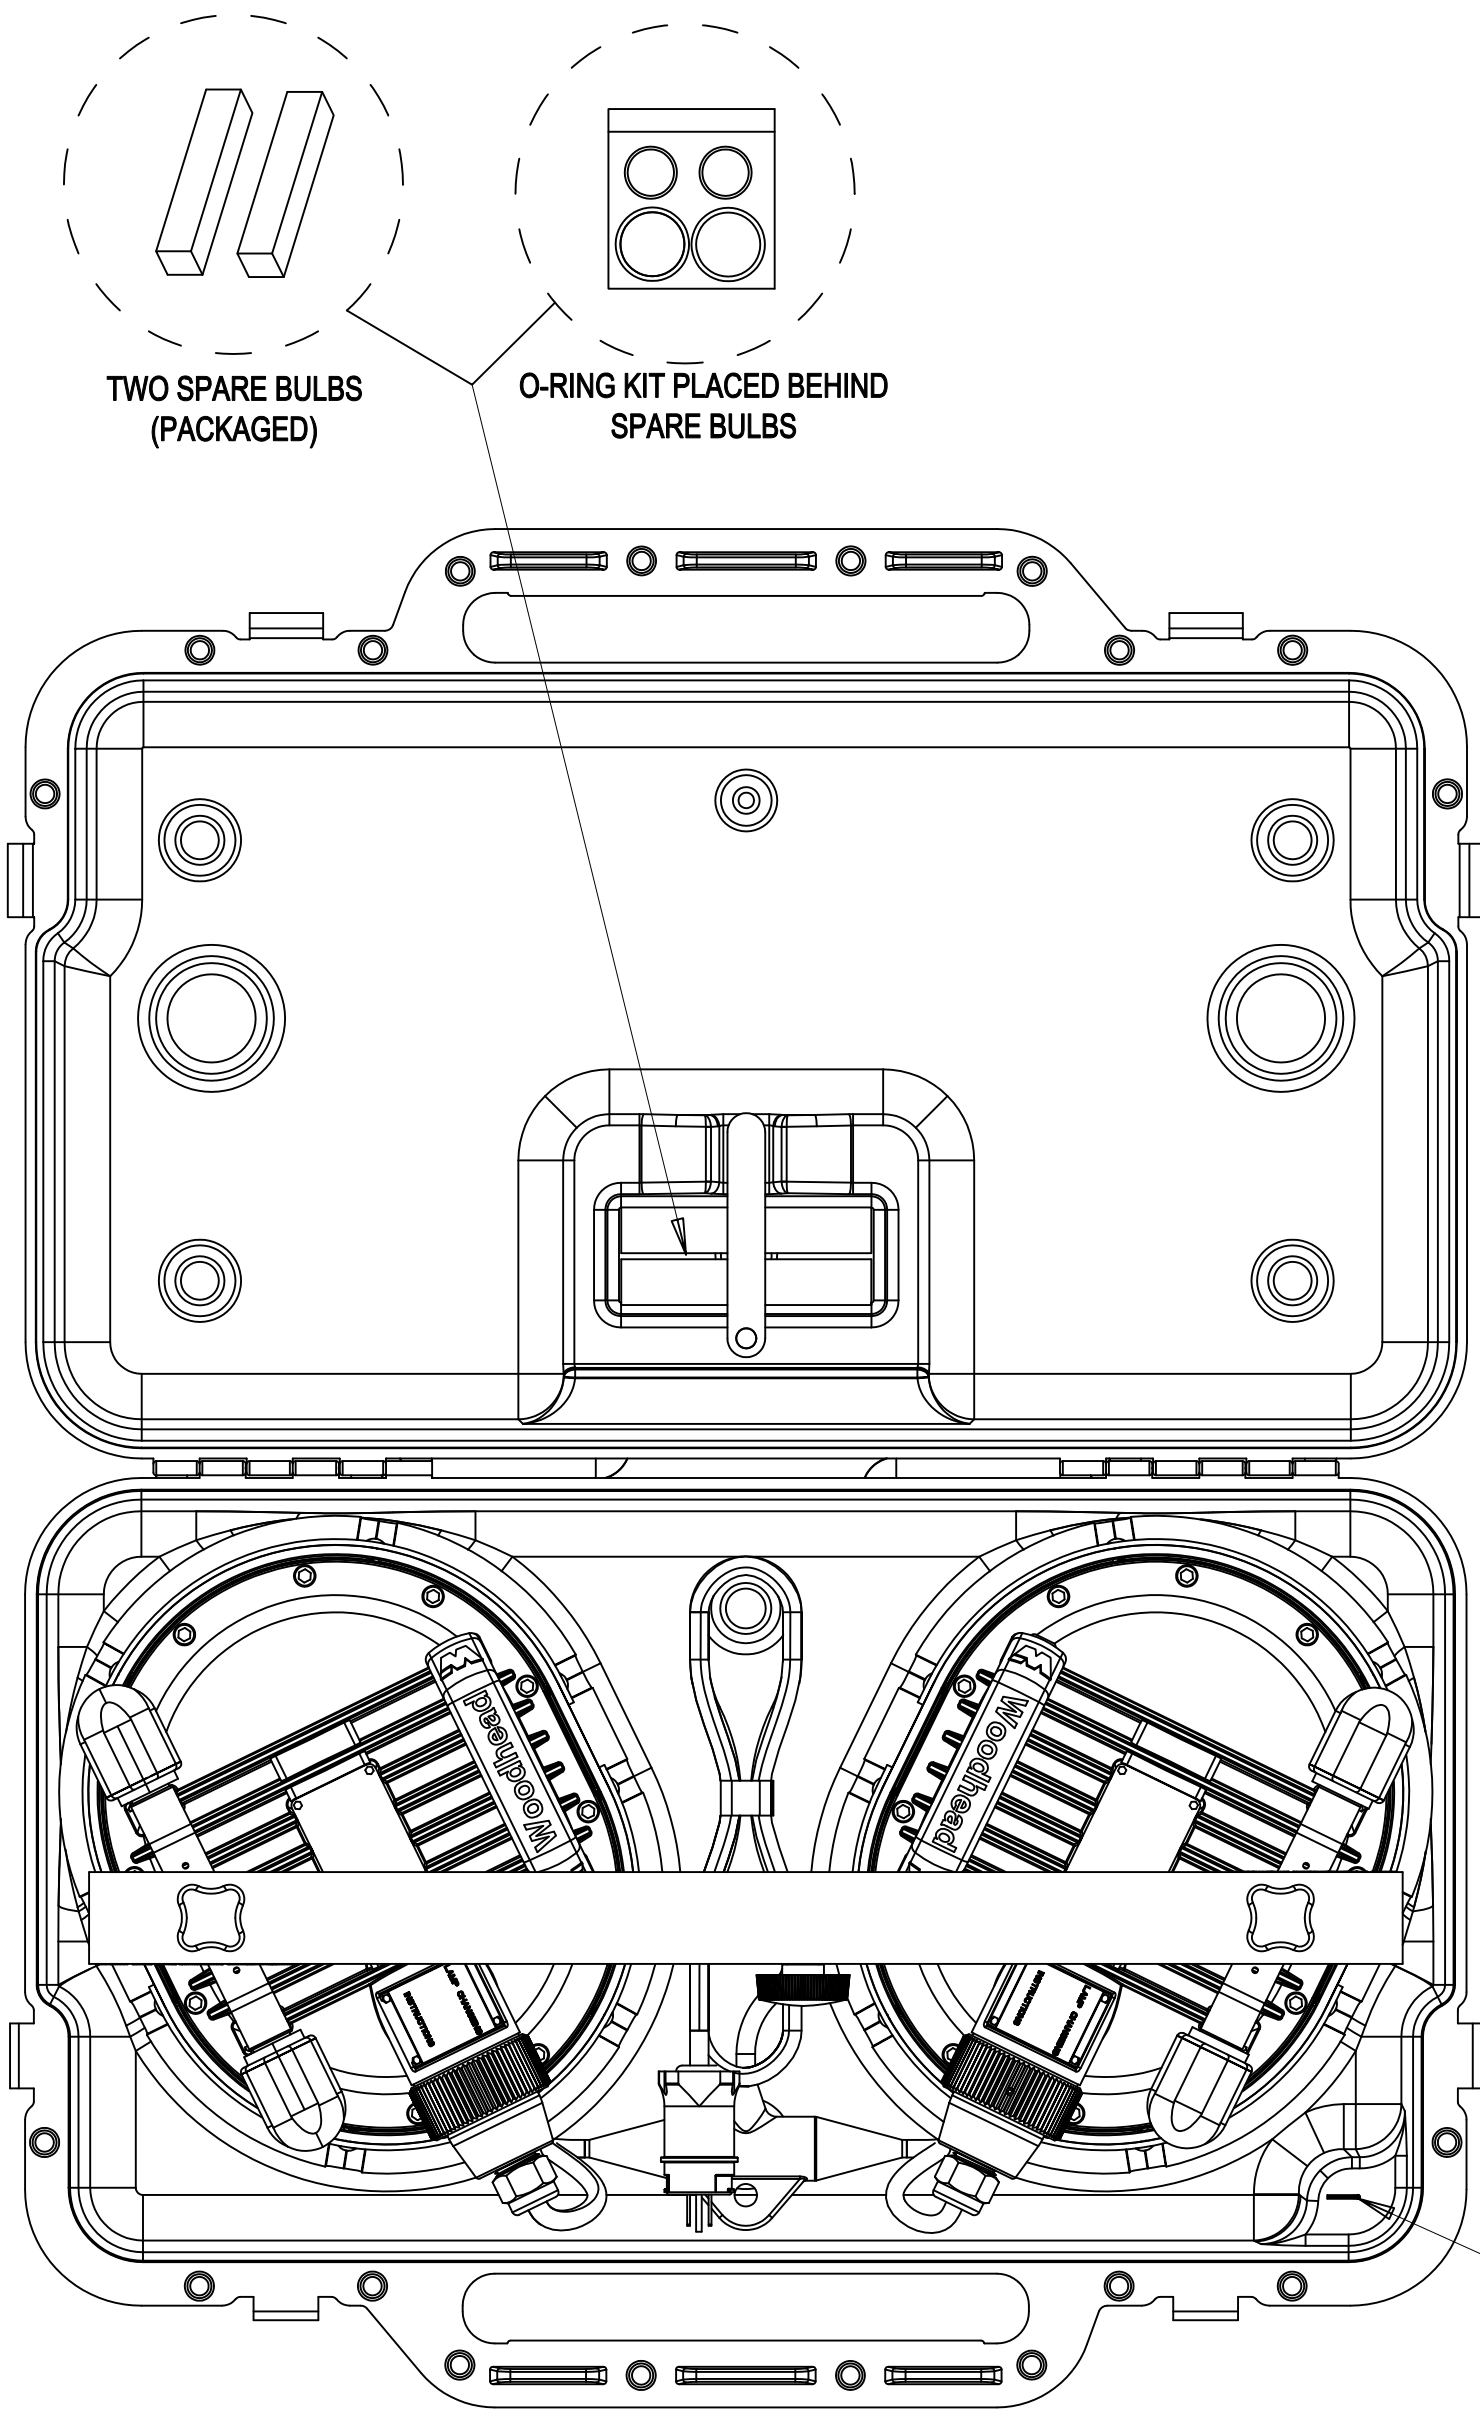

DETAIL B

ADD ENG. TABLE & SHEET 2 EC NO: WNA2010-0311 DRWN: MCHOJECK 11/5/09 CH'KD: --- APPR: DTITUS 2010/01/04	QUALITY SYMBOL ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±--- ±.020 1 PLACE ±--- ±.010	mm INCH ±--- ±--- ±--- ±.005 ±--- ±.020 ±--- ±.010	DRAWN BY MC	DATE 2009/01/23	TITLE HAZARDOUS LOCATION STANCHION LIGHT			
		ANGULAR ±1/2°		CHECKED BY DT	DATE 2009/01/23				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DTITUS	DATE 2009/12/04	mox MOLEX INCORPORATED			
				MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-130289-001			SHEET NO. 2 OF 2	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION