


TU SERIES

1W UNREGULATED

DANUBE

FEATURES

- DUAL IN LINE PACKAGE
- 1W UNREGULATED OUTPUT POWER
- 100% BURNED IN
- HIGH EFFICIENCY
- INTERNAL SMD TECHNOLOGY
- LOW COST
- NO HEATSINK REQUIRED
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE
- 1500VDC ISOLATION
- RoHS COMPLIANT
- 3 YEARS WARRANTY

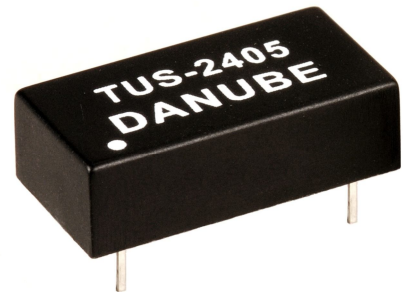

OUTPUT SPECIFICATIONS

Voltage Setpoint Accuracy	+/-2% max
Temperature Coefficient	+/-0.05%/°C
Ripple & Noise(20MHz BW) ¹	100mVp-p max
Line Regulation ²	+/-1.2% max
Load Regulation ³	+/-8% max
Minimum Load	10% of Full Load
Short Circuit Protection	Momentary

INPUT SPECIFICATIONS

Input Voltage Range	+/-10% max
Input Filter	Capacitor Typ
Protection	Fuse Recommended
Input Reflected Ripple Current	50mA _{p-p} max

GENERAL SPECIFICATIONS

Efficiency	70%-82%
Isolation Voltage ⁴	1500 VDC min
Isolation Resistance	10 ⁹ ohms min
Isolation Capacitance	80pF max
Switching Frequency	50KHz min
MTBF ⁵	>2,000,000 Hours
Weight	2.2g Typ

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-25 °C to +71 °C
Case Temperature	+90 °C max
Storage Temperature	-55 °C to +125 °C
Humidity	95% max
Cooling	Free-Air Convection

Case Material	Non-Conductive Plastic
Case Size	20.3mm*10.2mm*7.1mm
Conducted Emissions	EN55022 Class A
Radiated Emissions	EN55022 Class A

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD, AND 25°C UNLESS OTHERWISE NOTED.

¹ Measured with 1uF ceramic capacitor connect to the output pins.

² Line Regulation is for a 1.0% change in input Voltage.

³ Load Regulation is for output load current change from 20% to 100%.

⁴ For 10 seconds.

⁵ MIL-HDBK-217F @25 °C, Ground Benign.

● **SELECTION GUIDE**
1W OUTPUT

MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT ⁶ CURRENT(mA)		EFF (%) ⁷	PACKAGE
				FULL LOAD	NO LOAD		
				TUS-0505 (A or B)	5		
TUS-0512 (A or B)	5	12	84	253	26	79	A or B
TUS-0515 (A or B)	5	15	67	253	28	79	A or B
TUD-0505A	5	+/-5	+/-100	274	26	73	A
TUD-0512A	5	+/-12	+/-42	253	26	79	A
TUD-0515A	5	+/-15	+/-34	253	28	79	A
TUD-0524A	5	+/-24	+/-21	257	28	78	A
TUS-1205 (A or B)	12	5	200	112	11	74	A or B
TUS-1212 (A or B)	12	12	84	102	11	82	A or B
TUS-1215 (A or B)	12	15	67	102	12	82	A or B
TUD-1205A	12	+/-5	+/-100	112	11	74	A
TUD-1212A	12	+/-12	+/-42	102	11	82	A
TUD-1215A	12	+/-15	+/-34	102	12	82	A
TUS-2405 (A or B)	24	5	200	57	8	73	A or B
TUS-2412 (A or B)	24	12	84	54	8	77	A or B
TUS-2415 (A or B)	24	15	67	52	7	80	A or B
TUD-2405A	24	+/-5	+/-100	57	8	73	A
TUD-2412A	24	+/-12	+/-42	54	8	77	A
TUD-2415A	24	+/-15	+/-34	54	9	77	A

Note: Other input to output voltages may be available. Please contact factory.



⁶ NOMINAL INPUT VOLTAGE.

⁷ NOMINAL INPUT VOLTAGE, FULL LOAD.

● MECHANICAL DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

PACKAGE "A" SIDE VIEW

BOTTOM VIEW

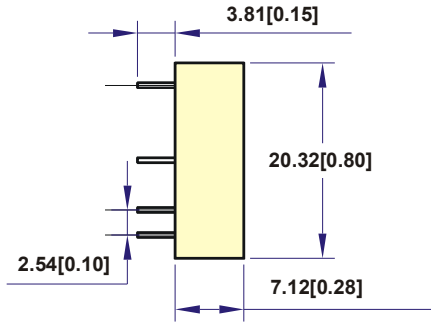

All dimensions are in millimeters[inches]



PIN	SINGLE	DUAL
1	-Vin	-Vin
7	NC	NC
8	-Vout	COMMON
9	+Vout	+Vout
11	NC	-Vout
14	+Vin	+Vin

NOTE : All Dimensions In mm(Inches)

1. Pin Size is 0.50x0.30mm[0.02x0.01"]
2. Pin is Tolerance .XX= ±0.05mm
3. Tolerance .X or .XX= ±0.5mm

PACKAGE "B" SIDE VIEW

BOTTOM VIEW

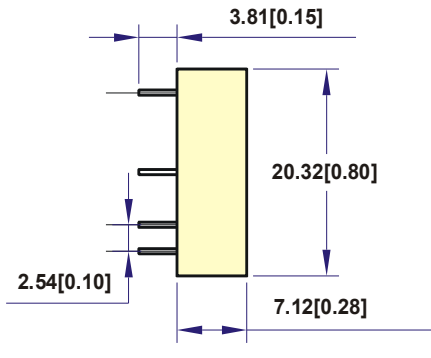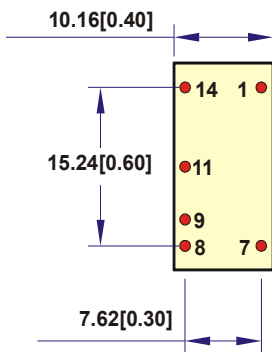


All dimensions are in millimeters[inches]

PIN	SINGLE
1	-Vin
7	NC
8	NO PIN
9	+Vout
11	-Vout
14	+Vin



NOTE : All Dimensions In mm(Inches)

1. Pin Size is 0.50x0.30mm[0.02x0.01"]
2. Pin is Tolerance .XX= ±0.05mm
3. Tolerance .X or .XX= ±0.5mm

TOP VIEW

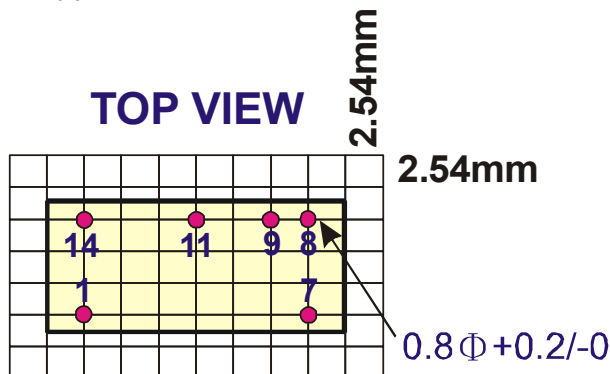


● SIMPLIFIED SCHEMATIC

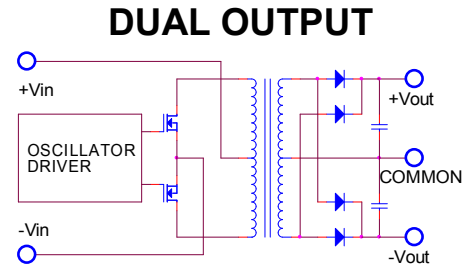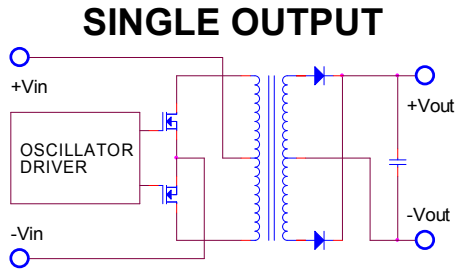


● TYPICAL APPLICATIONS

SINGLE OUTPUT

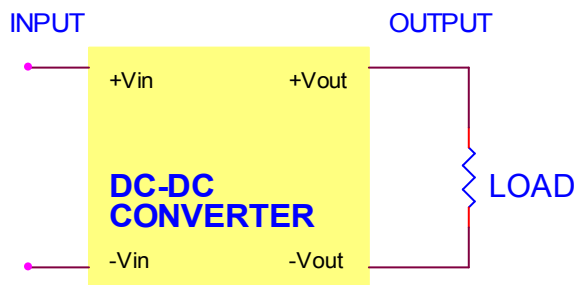


DUAL OUTPUT

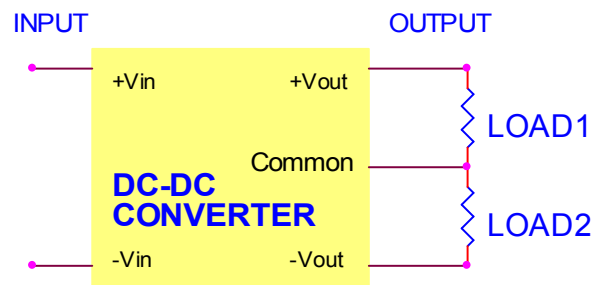


● TYPICAL PERFORMANCE CURVES

Specifications typical at $T_A=25^{\circ}\text{C}$, nominal input voltage, rated output current unless otherwise specified.

VOUT VS LOAD(5Vout Models)


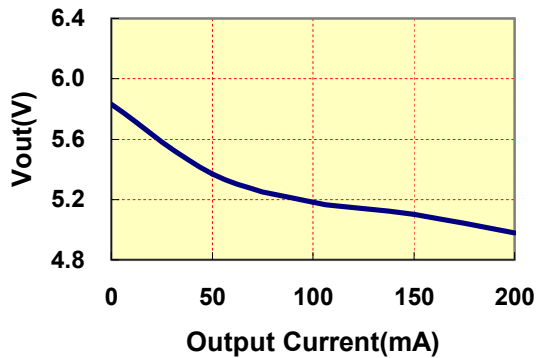


VOUT VS LOAD(+/- 5Vout Models)

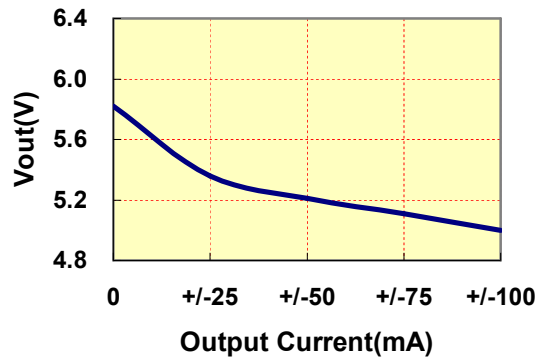



VOUT VS LOAD(12Vout Models)

VOUT VS LOAD(+/- 12Vout Models)

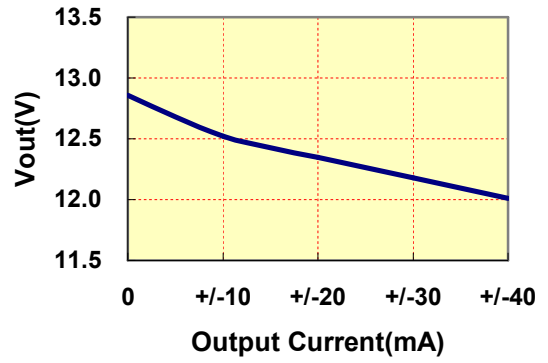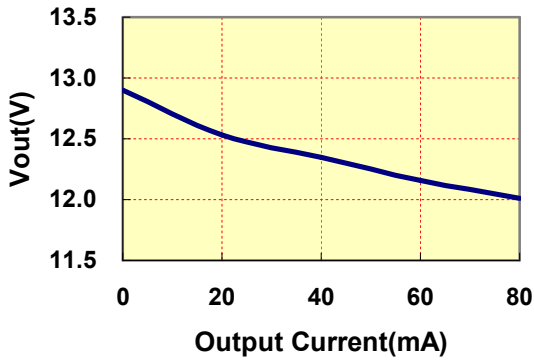



VOUT VS LOAD(15Vout Models)

VOUT VS LOAD(+/- 15Vout Models)

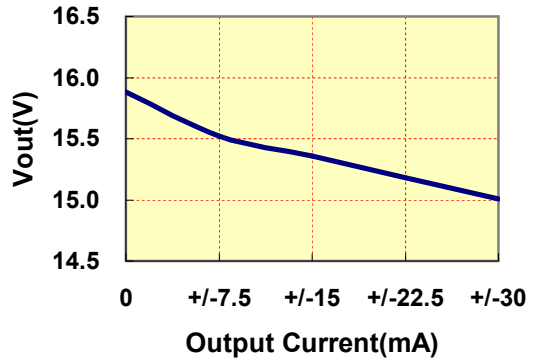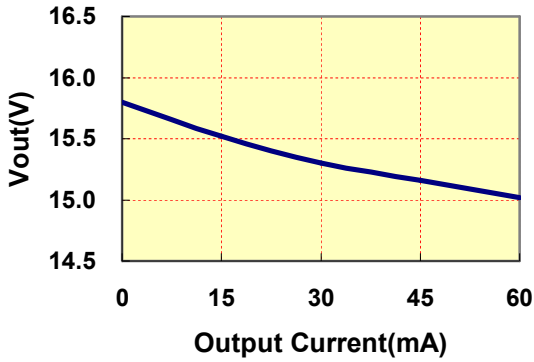

DERATING CURVE

EFFICIENCY VS LOAD

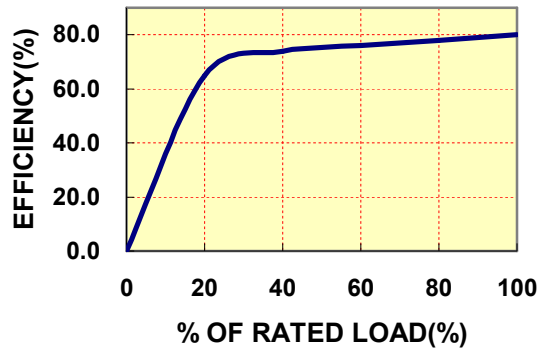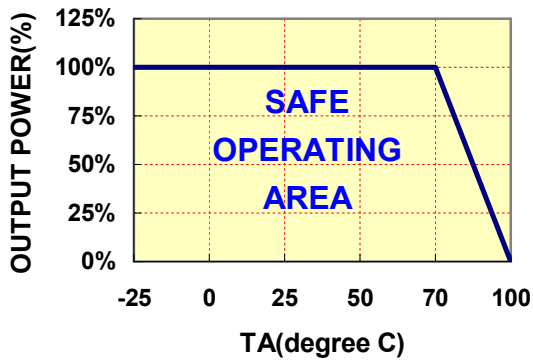

● INPUT FUSE SELECTION GUIDE

4.5-5.5V INPUT VOLTAGE(VDC)	10.8-13.2V INPUT VOLTAGE(VDC)	21.6-26.4V INPUT VOLTAGE(VDC)
400mA Slow-Blow Type	200mA Slow-Blow Type	90mA Slow-Blow Type

Note: Certain applications may require the installation of external fuse in front of the input.

TU SERIES APPLICATION NOTES:

EXTERNAL CAPACITANCE REQUIREMENTS:

Output filtering is required for operation. A minimum of 10uF is needed. Output capacitance may be increased for additional filtering, not to exceed 220uF.

To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 ohm from DC to 250KHz is required.

We Can Offer EMC-Filter According To EN55011/22 Class B.

Negative Outputs:

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.

FOR MORE INFORMATION CALL:

Danube Enterprise Co., Ltd.

Tel: 886-7-3755165

Fax: 886-7-3755330

E-mail: danube@ms10.hinet.net

Home Page

<http://www.danube.com.tw>
