REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Yumer	2020/04/16

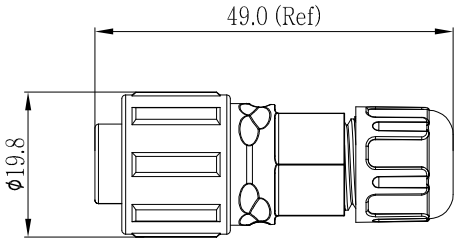



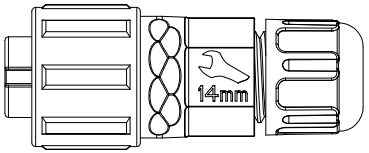

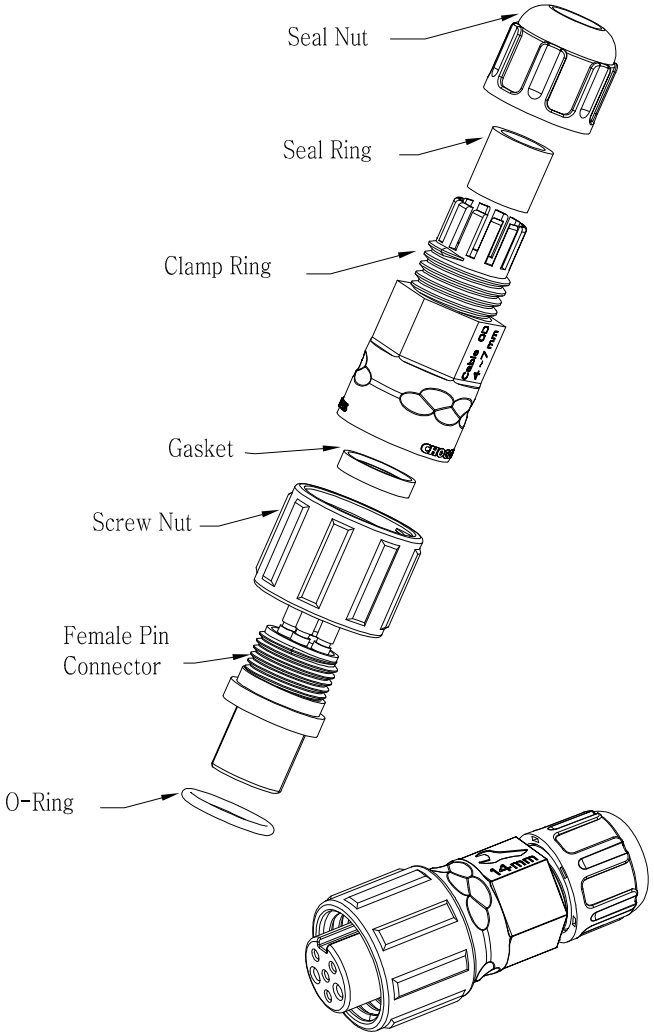

Specification:
1.Operation Temperature:-45°C~105°C.
2.Insulation Resistance:100MΩ at DC500V.
3.Contact Resistance:<10mΩ.
4.Withstand Voltage: 1300V AC
5.Operating Current:10+5A
6.Operating Voltage:AC 60V
7.Waterproof Rate:IP67 (Mated)
8.Seal Nut:Nylon, Black
9.Seal Ring:Silicon, Black.
10.Clamp Ring:Nylon, Black
11.Gasket:Silicon, Red
12.Screw Nut:Nylon, Black
13.Female Pin:Copper Alloy, Gold Plated
14.Connector:Nylon+GF, Black
15.O-Ring:Silicon, Red
16.RoHS Compliant.
17.Cable Range OD:ϕ3.5mm~ϕ6.8mm
18.Mating Cap:806-00032-00

22XXX211-01
Pin Number



2+4 Pin

P/N: 22204211-01

Pin Assignments Front View

UNIT:mm	DESCRIPTION: Standard Series Screw Male Plug With Female Pin	CHOGORI®	PART NO: 22XXX211-01	DRAWN BY: Yumer	DATE: 2020/04/16
TOLERANCE: .X ±0.25, .XX ±0.15, .XXX ±0.05, ANGLES ±1°	SCALE: 1:1 / SHEET: 1 OF 1		DWG NO	CHECKED BY: Ivan	DATE: 2020/04/16
	REV: C1 / SIZE: A4 / * :Inspection Item		CUSTOMER	APPROVED BY: Panson	DATE: 2020/04/16

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.