


MINT1175

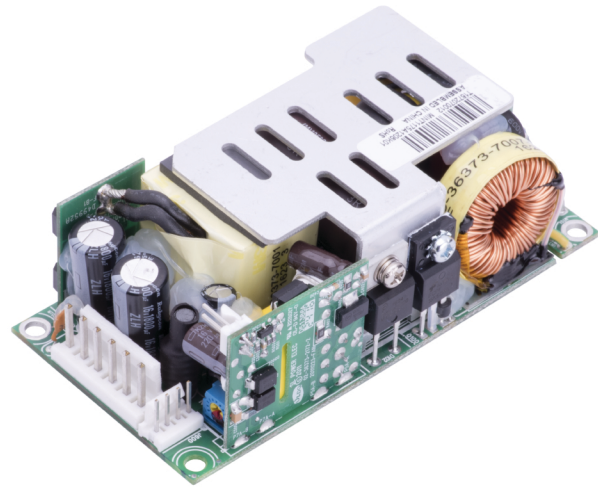

BENEFITS

- 175W Air Cooled, 120W Convection Cooled
- Compact 2"x4" foot print for 1U Applications
- 90% Efficiency Typical at Full Load
- < 200 μ A Leakage Current
- 3 Year Warranty

FEATURES

- Remote Inhibit, AC Power Fail & DC OK signals
- Approved to IEC60601-1 3rd Edition

VALUE PROPOSITION

- Meeting Class B EMI Levels with margin ensures less effort by the system designer to integrate a power supply into the end equipment.
- Built-in protections against unstable operational environments minimize the need for implementing at the system level, resulting in shorter development time and reduced cost.
- Use of high quality electrolytic capacitors well below their threshold and ESR ratings help extend the life of the end equipment, and minimize field service needs.
- High convection rating minimizes the need to rely on forced air, thereby increasing reliability and minimizing system cost by eliminating the need for a fan.
- SL Power local technical support capabilities provide real time help in solving potential design problems which could otherwise cause revenue loss due to delays in end product introduction.
- Extensive global presence can support customers product needs as they migrate from development to production, frequently in multiple locations around the world.

MARKETS

PLATFORMS

APPLICATIONS



Medical

MEDICAL

- Medical Lighting
- Operating Equipment
- Lab Equipment
- Dental Equipment
- Hospital Equipment
- Clinical Chemistry Instruments
- Microbiology Instruments
- Drug Administration
- Hematology Instruments
- ICU Factory Automation
- Patient Monitoring

MEDICAL

- LED Lighting for Heat Therapy
- Chemical Therapy Analyzer
- Sterilizers
- Mass Analyzers
- Dialysis Equipment
- Infusion Pump
- Cauterizer Device
- ICU Monitor Systems
- Pulse Oximeter
- Surgical Equipment
- Imaging

