

Chip Monolithic Ceramic Capacitor

**Electrical Characteristics Data**

**0603 NPO 2.7nF 50V(0603N272J500CT)**

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [nF]	2.7(±5%)
DF	≤ 0.1%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4991B)

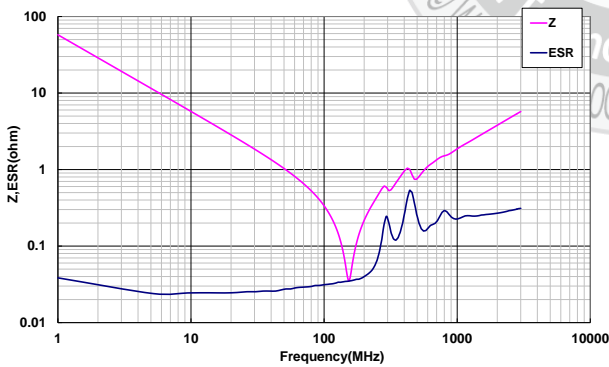

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

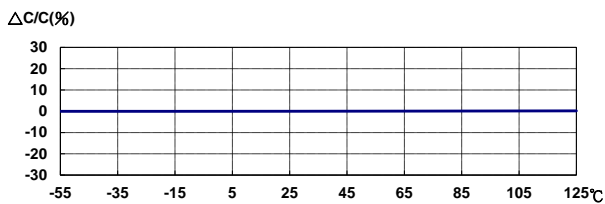


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980+B1505+N1259A)

(DC charge 60±5sec)

25V : 0.00% ; 50V : 0.00%

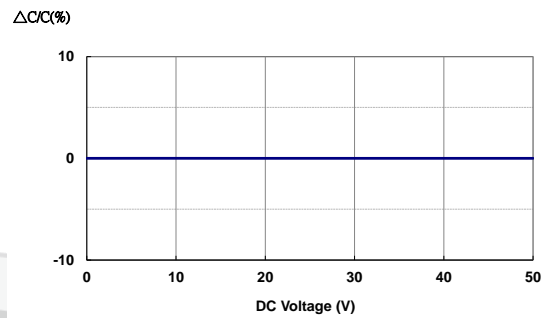

6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

