


P	LTR	DESCRIPTION	DATE	DWN	APVD
AC2		REVISED PER ECR-23-168072	29MAY2023	RK	JMV

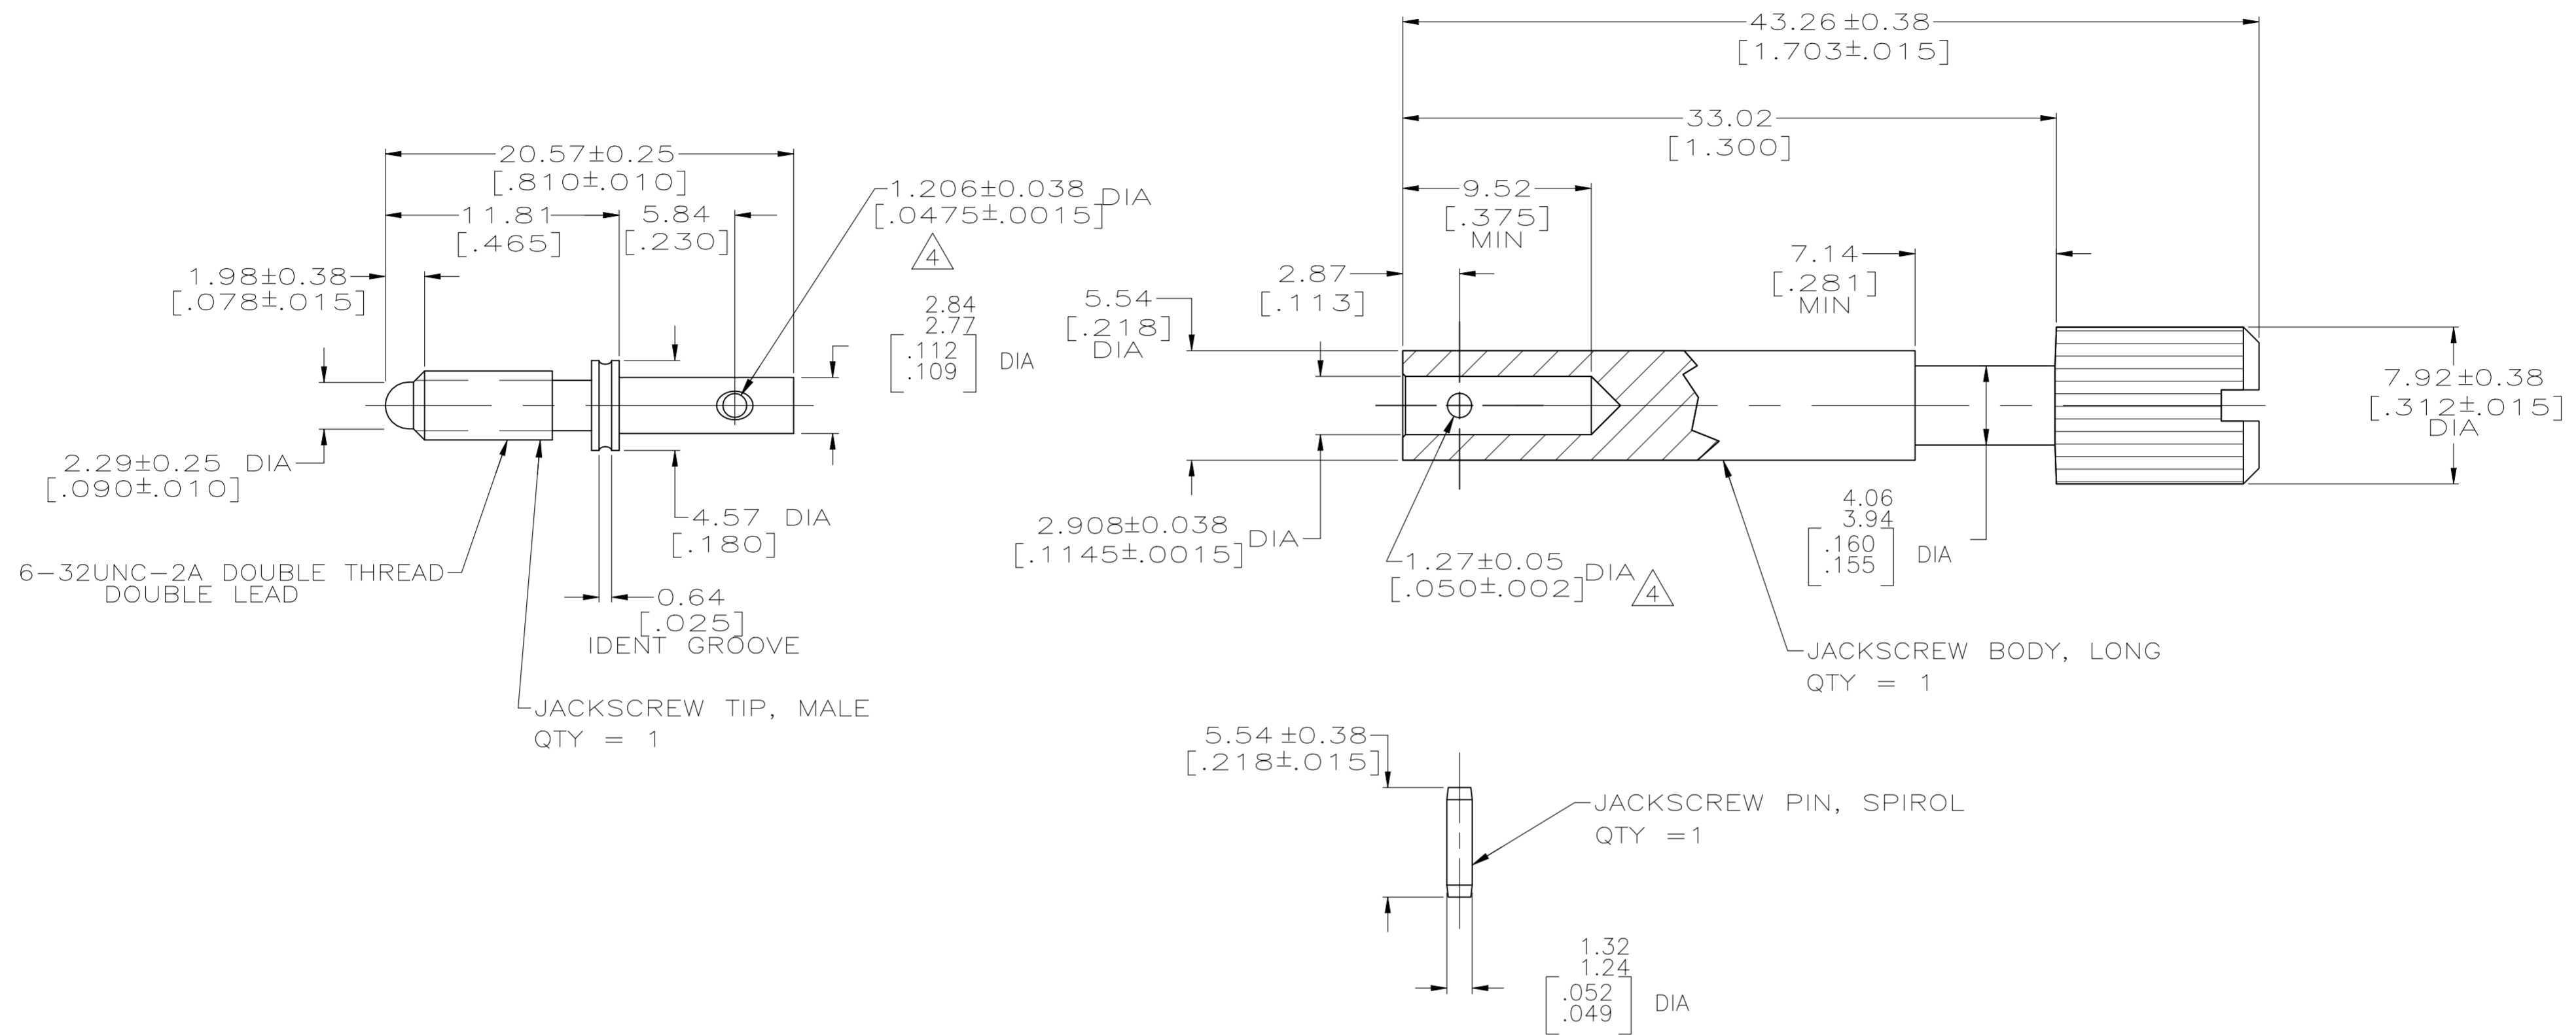

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ± 0.07 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200871-0
6	200871-1
NOTES	PART NUMBER

SUPERCEDED BY 1-200871-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/23/94
DIMENSIONS:		CHK	R.STONE	06/16/94
mm [INCHES]		APVD	-	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	NAME	
0 PLC	\pm -	APPLICATION SPEC	-	
1 PLC	\pm -	WEIGHT	-	
2 PLC	\pm 0.13 [.005]	SCALE	A2 00779 C=200871	
3 PLC	\pm -	SHEET	1 OF 1	
4 PLC	\pm -	REV	AC2	
ANGLES	\pm -	CUSTOMER DRAWING		
MATERIAL	JACKSCREW BODY: 1	TE Connectivity		
JACKSCREW TIP: 2	JACKSCREW PIN: PASSIVATED	JACKSCREW KIT, UNASSEMBLED, MALE, M SERIES		
JACKSCREW PIN: 3		RESTRICTED TO		