

Features

- Low forward voltage drop
- High junction temperature
- Moisture sensitivity: level 1, per J-STD-020
- Plastic package has underwriters laboratory flammability classification 94V-0
- Add suffix 'E' for halogen-free
- Halogen-free according to IEC 61249-2-21 definition
- AEC-Q101 qualified



Package: DO-214AA (SMB)

Applications

For use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	V
Maximum RMS Voltage	V _{RMS}	140	V
Maximum DC Blocking Voltage	V _{DC}	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	3	A
Peak Forward Surge Current (8.3ms Single Half Sine-Wave Superimposed on Rated Load)	I _{FSM}	100	A
Typical Thermal Resistance ¹	R _{θJA}	70	°C/W
	R _{θJC}	28	
	R _{θJL}	15	
Operating Junction Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Unit
Maximum Instantaneous Forward Voltage	V _F	I _F =3A	0.85	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	T _A =25°C	30	uA
		T _A =125°C	1000	
Typical Junction Capacitance	C _J	4.0V, 1MHz	80	pF
Typical Reverse Recovery Time	t _{rr}	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	16	ns

Note1: Thermal resistance from junction to lead, mounted on PCB with 8.0×8.0mm copper pads.

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

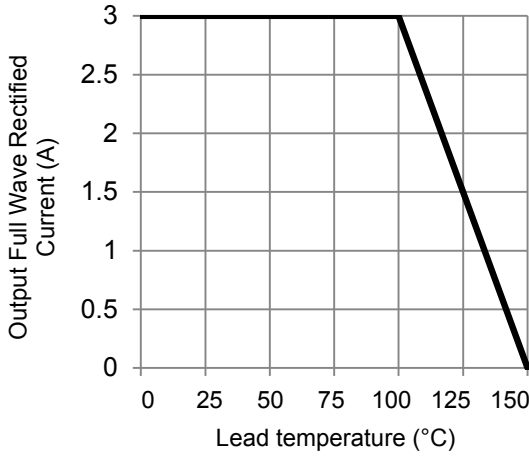


Figure 1. Forward Current Derating Curve

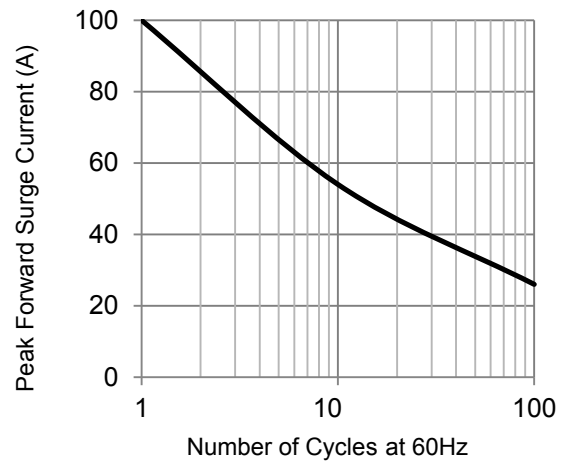


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

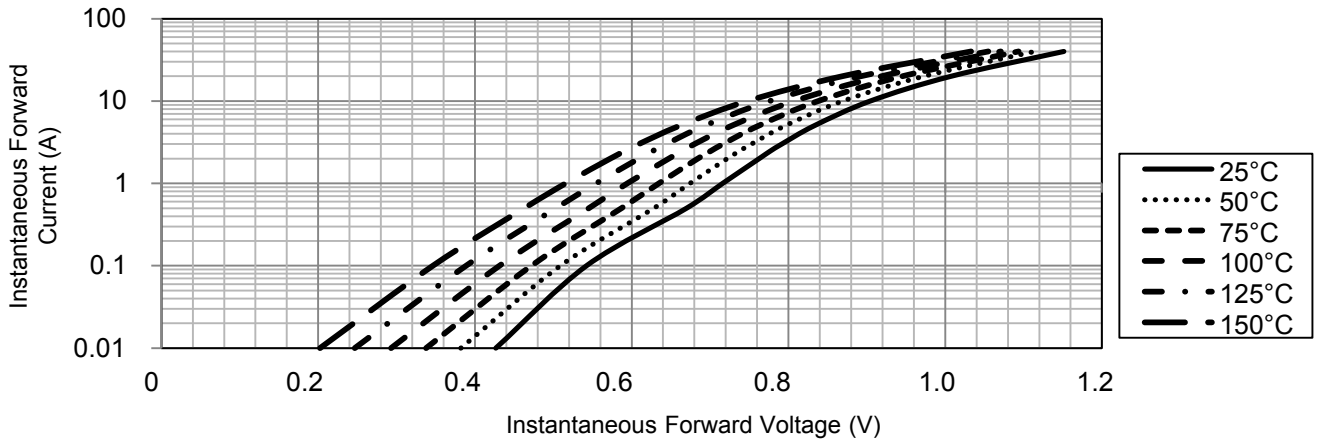


Figure 3. Typical Instantaneous Forward Characteristics


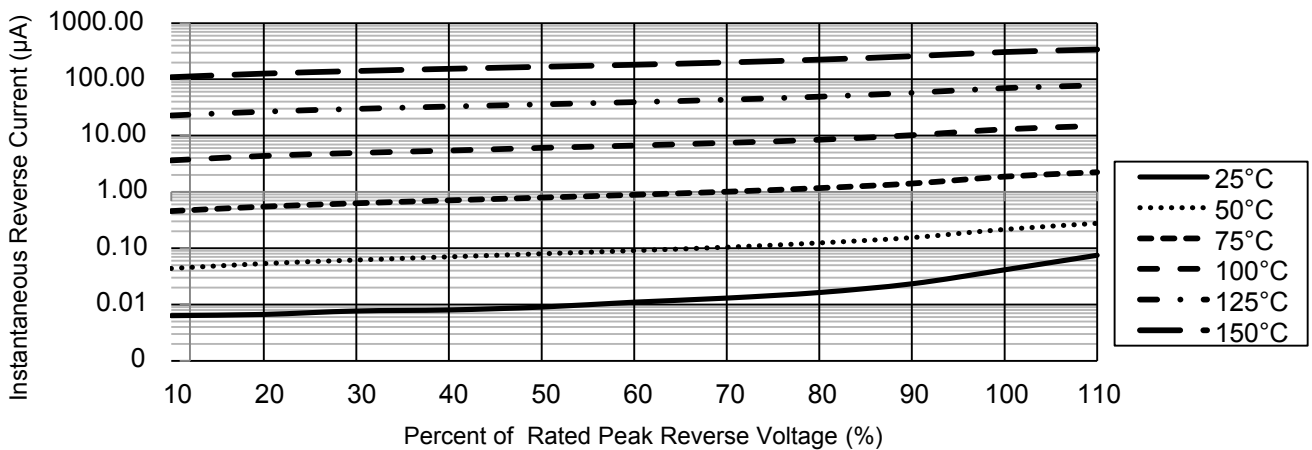



Figure 4. Typical Reverse Characteristics

Package Outline Dimensions (DO-214AA (SMB))

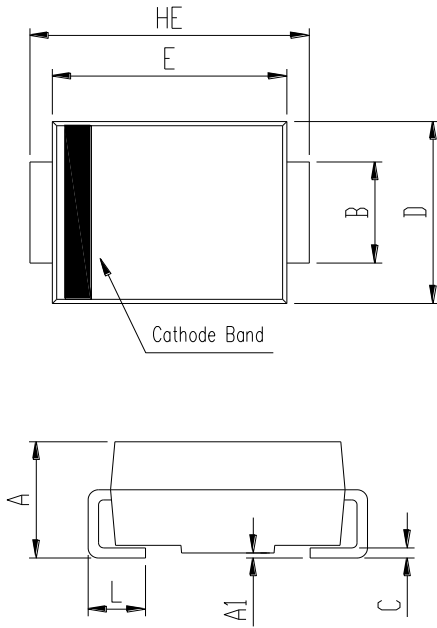

SMB (DO-214AA)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.99	2.61	0.078	0.103
A1	0.00	0.30	0.000	0.012
B	1.70	2.30	0.067	0.091
C	0.15	0.31	0.006	0.012
D	3.30	3.94	0.130	0.155
E	4.06	4.75	0.160	0.187
HE	4.70	5.70	0.185	0.224
L	0.76	1.52	0.030	0.060

Recommended Pad Layout

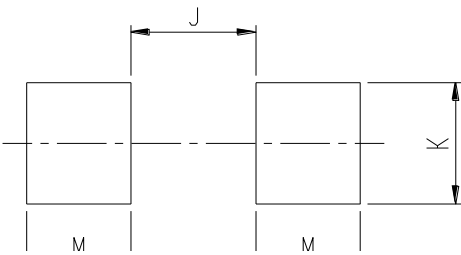

SMB Recommended Pad Layout (Reference Only)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	-	2.60	-	0.102
K	2.20	-	0.087	-
M	1.80	-	0.071	-