

## Electronic housing - EMG 17-B3 - 2946081

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Custom circuit module, consisting of housing, MKDS 3 connection terminal blocks and PCB

#### Your advantages

- ☑ Practical and easy-to-wire conductor connections
- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- High degree of flexibility due to the wide choice of versions
- Uniform and appropriate housing technology
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



### **Key Commercial Data**

Packing unit	10 pc
GTIN	4 017918 082048
GTIN	4017918082048

#### Technical data

#### General

Housing type	Component housing	
Housing material	Polycarbonate fiber reinforced	
Color (RAL)	green	

#### Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C
---------------------------------	---------------

#### **Dimensions**

Length	75 mm



# Electronic housing - EMG 17-B3 - 2946081

## Technical data

### Dimensions

Height	47.5 mm
Width	22.5 mm
Pitch	5 mm
Depth	75 mm

#### Technical data

Power dissipation without gap	1.3 W	
Power dissipation with 20 mm gap	1.4 W	
Number of positions	6	

### Standards and Regulations


Flammability rating according to UL 94	V0

### **Environmental Product Compliance**

REACh SVHC	Lead 7439-92-1		
China RoHS	Environmentally Friendly Use Period = 50		
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"		

## Drawings

### Dimensional drawing

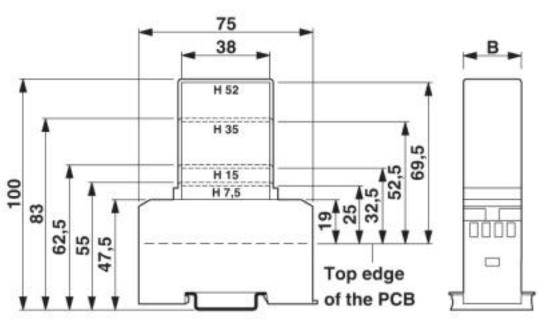


<sup>1 =</sup> Top edge of the PCB

B = Housing width



# Electronic housing - EMG 17-B3 - 2946081

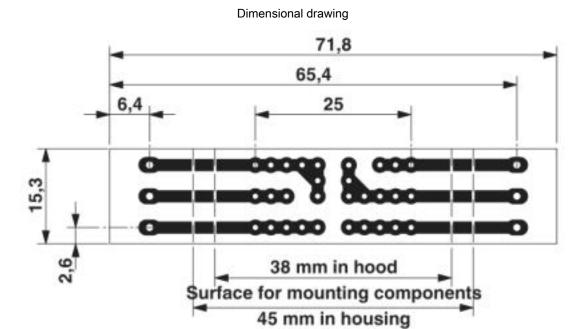

Pitch 5 mm

a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing

### Approvals

Approvais			
Approvals			
Approvals			
EAC			
Ex Approvals			
Approval details			
EAC	EAC		B.01742



Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

09/19/2019 Page 4 / 4