ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	701070003	SL WtW Conn SR WO/MtgE Opt A 4Ckt	2	PC
C	16020107	SL Male Crp Term 22-24awg Tin Reel	8	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B1	1X22AWG DISC MPPE BK UL11028	BLACK

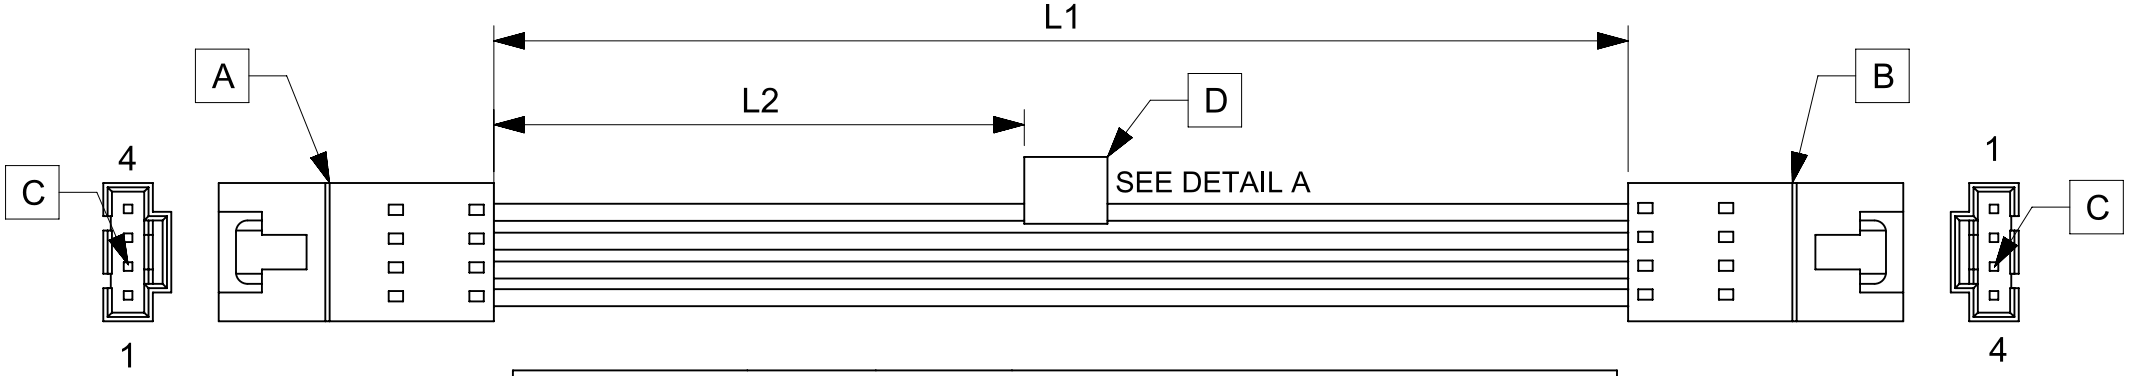

TABLE			
PART NUMBER	L1	L2	TITLE
2162721040	50±3	13 REF	SL POSITIVE LOCK P-P 4CKT 50MM Sn
2162721041	100±5	38 REF	SL POSITIVE LOCK P-P 4CKT 100MM Sn
2162721042	150±8	63 REF	SL POSITIVE LOCK P-P 4CKT 150MM Sn
2162721043	300±10	138 REF	SL POSITIVE LOCK P-P 4CKT 300MM Sn
2162721044	600±10	288 REF	SL POSITIVE LOCK P-P 4CKT 600MM Sn

PRE-RELEASE REFERENCE USE ONLY

NOTES
1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	°
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	
1 PLACE	±	
0 PLACES	±	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 642836
DRWN: ARAJU 2020/05/05
CHK'D:
APPR:

INITIAL REVISION:
DRWN: ARAJU 2020/05/05
APPR:

THIRD ANGLE PROJECTION | DRAWING: A4-SIZE | SERIES: 216272

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2162721040	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

RELEASE STATUS	RQ	RELEASE DATE	2020/08/05 04:25:47

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14