



(1)

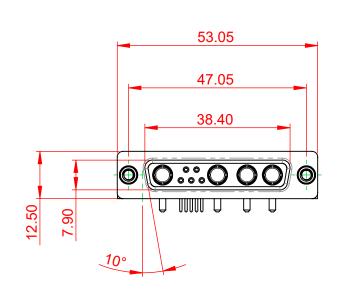



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

.XX ±0.13

.XXX ±0.05

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED


OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING:10A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5A PER CONTACT 10mΩ MAX. 5000MΩ min.

1000V AC rms

-55°C ~ 125°C



	COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY							
				DRAWN: C.B			DATE: JAN. 01/2019			19	
				CHECKED:			DATE:				
Y		EDAC INC TORONTO, ONTARIO CANADA O QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	(IN C.A.D. 1	:1)	SHEET	1	OF	2	
				DRAWING NUMBER: 630-9W4-			-650-1TE			ISSUE	
	YOUR CONNECTION TO QUALITY & SERV			PART NU	JMBER:	630-9W4-	650-1TE			1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

