


Specification Sheet

Part Number: 157-00360

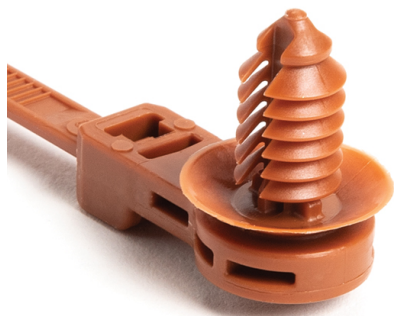

Off-Set design allows bundles to sit off of mounting points to avoid friction against surrounding areas.

Fir tree gives 3 to 1 extraction versus insertion force making them strong and easy to install.

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

Article Number	157-00360
Type	T50ROSFT6SO12.5A
Color	Brown (BN)
Quantity Per	bag

Product Description	HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.
----------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Short Description	1-Pc Cable Tie/Fir Tree Mount with Disc, 12.5mm Offset, 8.5"L, 6.1-7mm Hole, PA46, Brown, 4000/ctn
--------------------------	----------------------------------------------------------------------------------------------------

Global Part Name

T50ROSFT6SO12.5A-PA46-BN

Minimum Tensile Strength (Imperial)

50.0

Minimum Tensile Strength (Metric)

225.0

Length L (Imperial)

8.5

Length L (Metric)

215.9

Offset Length (Imperial)

0.49

Offset Length (Metric)

12.5

Fixation Method

Fir Tree

Identification Plate Position

none

Releasable Closure

No

Width W (Imperial)

0.20

Width W (Metric)

5.1

Bundle Diameter Min (Imperial)

0.08

Bundle Diameter Min (Metric)

2.0

Bundle Diameter Max (Imperial)

1.97

Bundle Diameter Max (Metric)

50.0

Height H (Imperial)	0.87
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.26
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.65
Mounting Hole Diameter D (Imperial)	0.24 - 0.28 ";0.24 - 0.26
Mounting Hole Diameter D (Metric)	6.1 - 6.9 mm 6.35 mm (hexagonal)
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.28 ";0.26
Mounting Hole Diameter D Max (Metric)	6.9
Disc Diameter (Metric)	15.0
Disc Diameter (Imperial)	0.59
Material	Polyamide 4.6 (PA46)
Material Shortcut	PA46
Operating Temperature	-40°F to +266°F (-40°C to +130°C)

Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	4000
Package Quantity (Metric)	4000
Customs Number	3926909988