


## Specification Sheet

Part Number: 170-03087

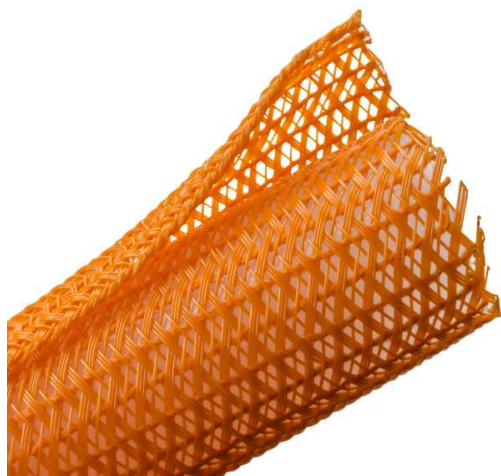

Braided Sleeving, Split Wrap, 1.5" Dia, PET, Orange, 75 ft/bulk reel

**Article Number**

170-03087

**Type**

BSPSW1123B

**Color**

Orange (OG)

**Features & Benefits**

- Split wrap design needs no fasteners and installs quickly, saving assembly time and future accessibility without disassembly.
- Bends to a tight radius without distortion or splitting open.
- Unique construction retains shape and rigidity throughout unrolling.
- Easy open design allows quick access and ability to apply protective sleeving post assembly or post installation situations.

**Quantity Per**

reel

**Product Description**

A lateral split, semi-rigid and flame retardant braided sleeving configuration used when ease of installation and repeat access to wire bundle is required. The lateral split allows the sleeving to open and accommodate a variety of bundling requirements. The 25% edge overlap rolls back over connectors and splices without exposing the bundled wires.

|                                       |  |
|---------------------------------------|--|
| <b>Short Description</b>              | Braided Sleeving, Split Wrap, 1.5" Dia, PET, Orange, 75 ft/bulk reel |
| <b>Global Part Name</b>               | BSPSW1123B-PET-OG  |
| <b>Length L (Imperial)</b>            | 75.0   |
| <b>Length L (Metric)</b>              | 22.9   |
| <b>Bundle Diameter Min (Imperial)</b> | 0.1  |
| <b>Bundle Diameter Min (Metric)</b>   | 2.54   |
| <b>Bundle Diameter Max (Imperial)</b> | 1.5  |
| <b>Bundle Diameter Max (Metric)</b>   | 38.1   |
| <b>Diameter D (imperial)</b>          | 2.0  |
| <b>Diameter D (metric)</b>            | 50.8   |
| <b>Nominal Diameter (Imperial)</b>    | 1-1/2  |
| <b>Nominal Diameter (Metric)</b>      | 38.1   |
| <b>Wall Thickness WT (Imperial)</b>   | 0.038  |
| <b>Wall Thickness WT (Metric)</b>     | 0.97   |
| <b>Material</b>                       | Polyester (PET)  |

**Material Shortcut**

PET

**Flammability**

UL 94 V0

**Halogen free**

Yes

**Operating Temperature (Metric)**

-94°F to +257°F (-70°C to +125°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**UL Recognized (US)**

Yes

**Package Quantity(Imperial)**

75

**Package Quantity (Metric)**

22.86

**Customs Number**

5808100000

**Weight (Metric)**

0.95

**Weight (Imperial)**

2.1