

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	50579404	SL Crp Hsg G SR Pos Ltch 4Ckt Opt G	2	PC
C	16020086	SL Fem Crimp Term 22-24 Tin Reel x	8	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B1	1X22AWG DISC MPPE BK UL11028	BLACK

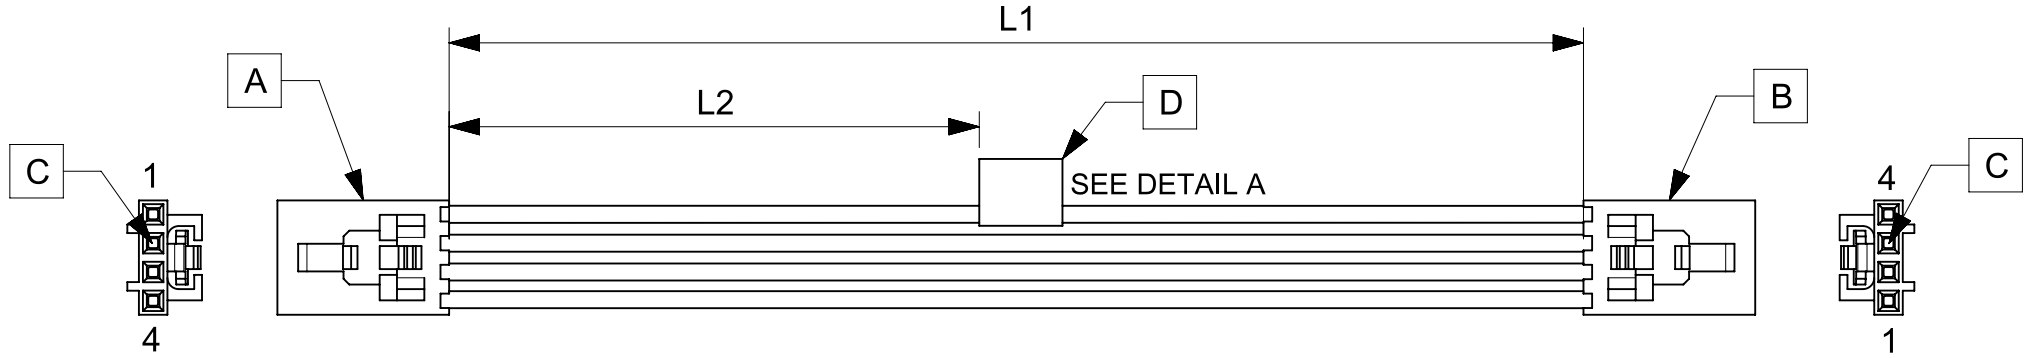


TABLE			
PART NUMBER	L1	L2	TITLE
2162701040	50±3	13 REF	SL POSITIVE LOCK R-R 4CKT 50MM Sn
2162701041	100±5	38 REF	SL POSITIVE LOCK R-R 4CKT 100MM Sn
2162701042	150±8	63 REF	SL POSITIVE LOCK R-R 4CKT 150MM Sn
2162701043	300±10	138 REF	SL POSITIVE LOCK R-R 4CKT 300MM Sn
2162701044	600±10	288 REF	SL POSITIVE LOCK R-R 4CKT 600MM Sn

**NOTES**

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:						
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)						
	mm	NTS	ANGULAR TOL ± °						
	4 PLACES ±		EC NO: 642836						
3 PLACES ±		DRWN: ARAJU 2020/05/05		PRODUCT CUSTOMER DRAWING					
2 PLACES ±		CHK'D: RDESAI01 2020/08/05							
1 PLACE ±		APPR: RDESAI01 2020/08/05		DOCUMENT NUMBER <b>2162701040</b>					
0 PLACES ±		INITIAL REVISION:							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOC TYPE	DOC PART	REVISION
			A4-SIZE	216270	SEE TABLE	GENERAL MARKET	PSD	000	A

RELEASE STATUS	P1	RELEASE DATE	2020/08/05	05:06:33
----------------	----	--------------	------------	----------