


# Decibel Meter PCE-SLT-TRM

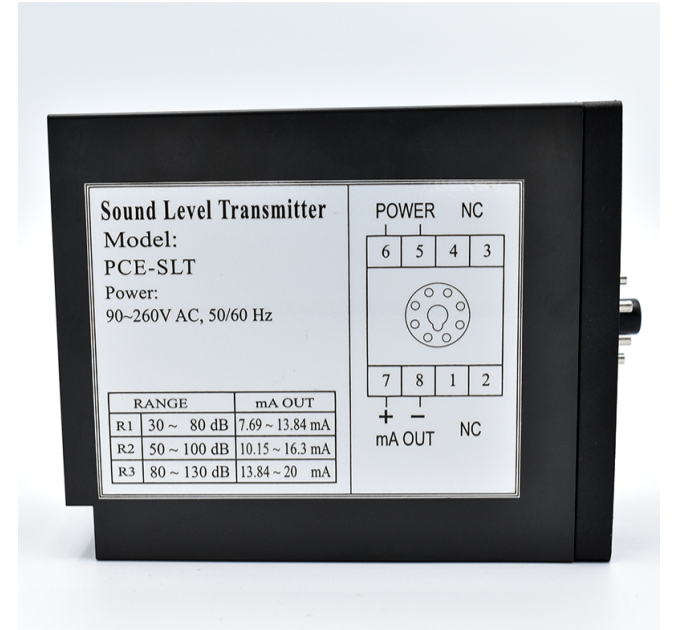

PCE-SLT-TRM is a class II (type 2) sound level, sound pressure level (SPL), decibel (dB) or noise meter with audible or visual alarm output capability. PCE-SLT-TRM is used for long-term, continuous monitoring of occupational noise exposure limits in industrial environments such as foundries, factories and manufacturing production floors. The measuring device consists of a wall-mountable acoustic sensor on a 1.5 m / 4.92' long cable and a transmitter.

- ▶ Measuring range: 30 ... 130 dB in 3 ranges
- ▶ Resolution: 0.1 dB
- ▶ Accuracy:  $\pm 1.5$  dB
- ▶ IP 54 ingress protection rating on transmitter offers limited protection against dust ingress (no harmful deposit) and protection against splashed water from any direction

# Specifications

## Sensor

Measuringrange	30 ... 130 dB in 3 ranges: I. 30 ... 80 dB(A) II. 50 ... 100 dB(A) III. 80 ... 130 dB(A)
Resolution	0.1 dB
Accuracy	±1.5 dB
Frequency weighting	A
Power supply	Via transmitter
Cable length (sensor to transmitter)	1.5 m / 4.92'
Operating conditions	0 ... +50 °C / +32 ... +122 °F, max. 85 % RH
Microphone	1/2" precision electret
Standard	IEC 61 672 (Class II)

## Transmitter

Housing	ABS plastic
Power supply	90 ... 260 AC V / 50 or 60 Hz
Calibration	Adjustableby set screw
Output	4 ... 20 mA
Protection class	IP 54 ingress protection rating
Operating conditions	0 ... +50 °C / +32 ... +122 °F, max. 85 % RH

# More information

Manual



More product info



Similar products



Subject to change