
THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)

ORIGINAL

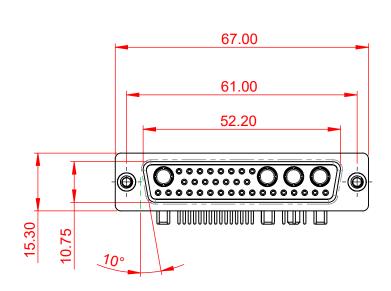



NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


.X ±0.25 .XX ±0.13

.XXX ±0.05

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms




				SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION D-SUB				C.B	DATE: JAN. 01/2019	
					:	DATE:	
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-36W4		4240-3N2	ISSUE
Y		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUN	ABER: 630-36W4	4240-3N2	1	

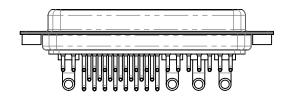



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

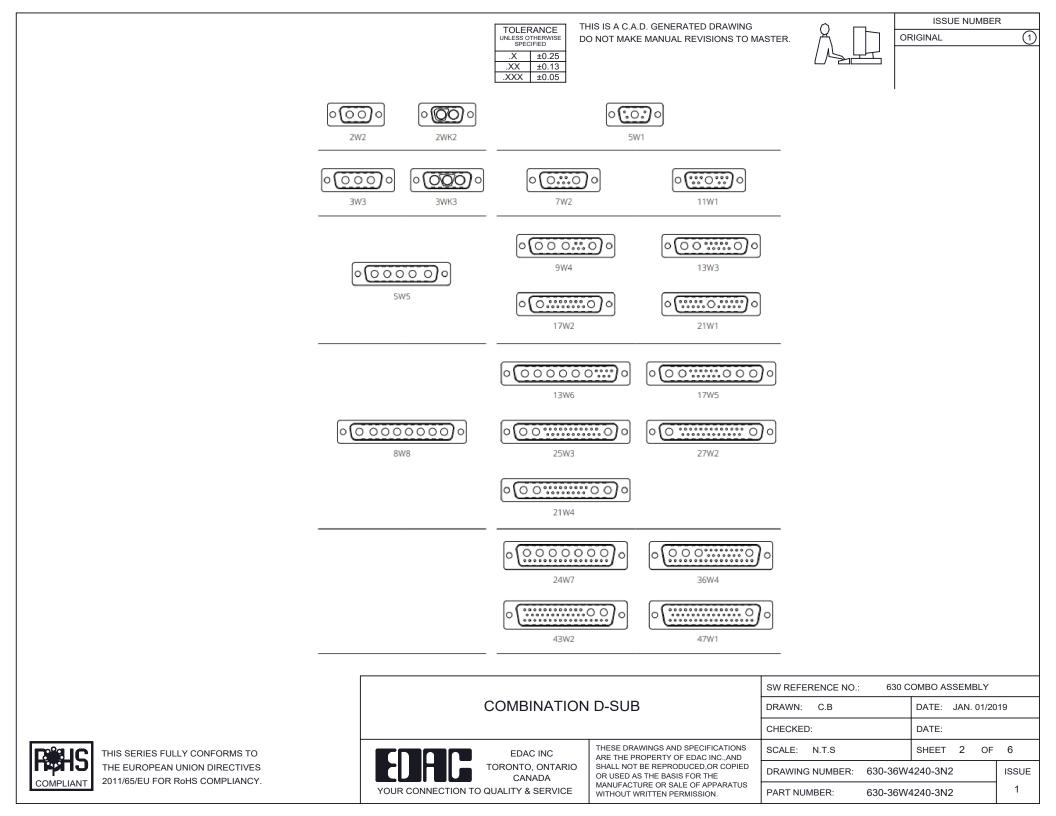



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female






ISSUE NUMBER

 $\overline{(1)}$




5W5 Female






PCB EDGE




POB EDGE



27W2 Male/Female

21W4 Male/Female



21W1 Male/Female



	SW REFERENCE NO.: 630 COMBO ASSEMBLY				
COMBINATION	DRAWN: C.B	DATE: JAN. 01/2019			
				DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 3 OF	4	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W	4240-3N2	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-36W	4240-3N2	1	

23.53


PCB EDGE

PCB EDGE


8W8 Female

CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2




17W2 Male/Female




PCB EDGE







THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male






25W3 Male






24,77

PCB EDGE



31.75

36W4 Female

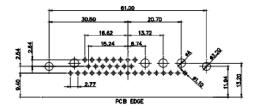

13W6 Male





22.18

2.77

20.78

13W6 Female

13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

43W2 Female



17W5 Male





COMBINATION D-SUB


EDAC INC


TORONTO, ONTARIO


CANADA

YOUR CONNECTION TO QUALITY & SERVICE



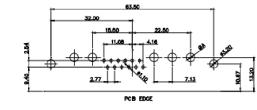

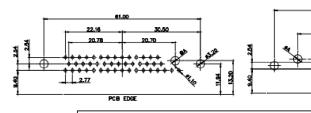

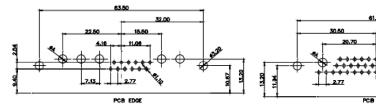

THESE DRAWINGS AND SPECIFICATIONS


SHALL NOT BE REPRODUCED, OR COPIED

MANUFACTURE OR SALE OF APPARATUS

ARE THE PROPERTY OF EDAC INC..AND

OR USED AS THE BASIS FOR THE

WITHOUT WRITTEN PERMISSION.

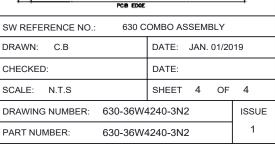

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT



20.7

13.72

PCB EDGE

