

# Precision Test Adapters

## 2.92 mm(F) to 2.92 mm(F) : Bulkhead type

**withwave**

Versatile RF & MW Test Solutions

**Withwave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 2.92 mm(F) to 2.92 mm(F) adapter with bulkhead is manufactured to precise microwave specifications and constructed with female gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz



### ■ Features

- Frequency range : DC to 40 GHz
- VSWR : 1.30 : 1(Max) @ 40 GHz
- Stainless steel (passivated)

### ■ Specification

Scope	Specification	AD03F03FS2
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 40 GHz
	VSWR (Max)	1.30: 1
Material	Dielectric	Special dielectric
	Center Contact	BeCu with gold plated
	Body	Passivated Stainless Steel

\* RoHS Compliant


# Precision Test Adapters

## 2.92 mm(F) to 2.92 mm(F) : Bulkhead type

### Drawing

Unit : mm

Part No.: AD03F03FS2

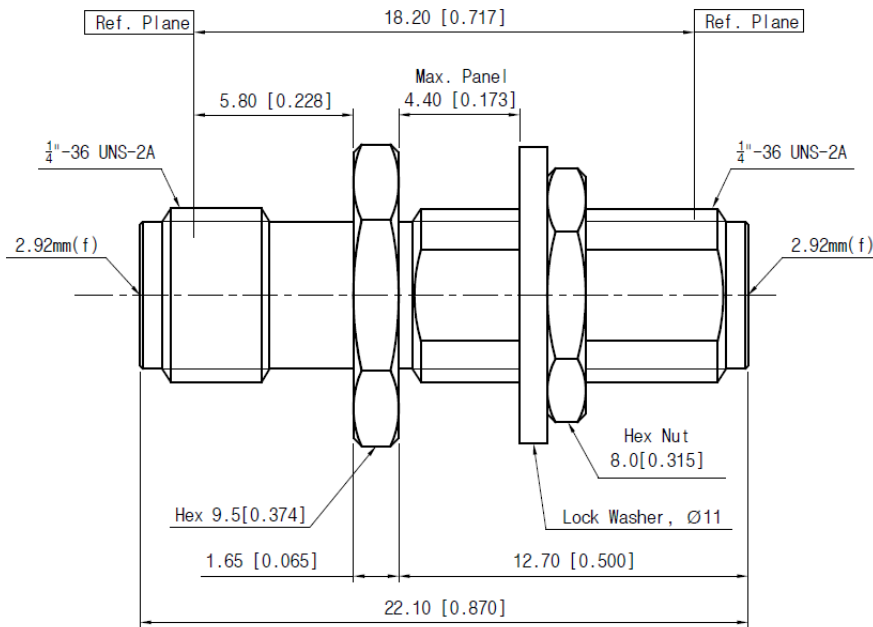

### Test Result

