



DATE BY REVISION

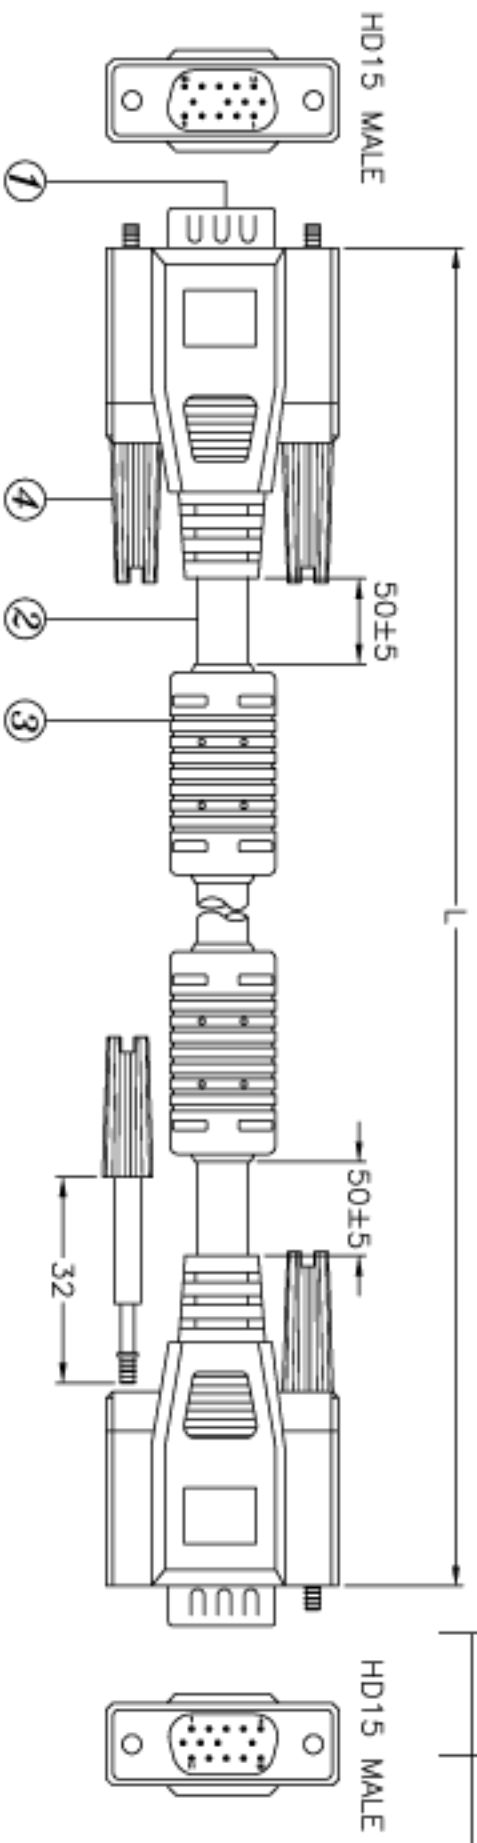

CONFIGURATION:
HD15M

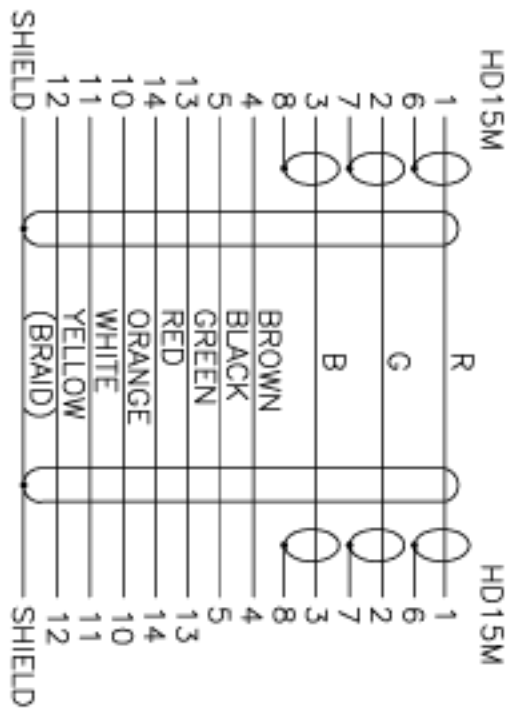

- MAT'L:
1. CABLE: #28, UL2919, 3COAX+7C+1+AL/MY+Braid, O.D:8.5
 2. CONNECTOR: HD15M, 9th EMPTY, BLACK
 3. THUMBSCREW: #4-40UNC, E32
 4. FERRITE CORE: RH16x28x9
 5. COPPER TAPE: 30x50mm
 6. BLACK HEAT SHRINK TUBE: ϕ 1.0x14:6PCS ϕ 3x8:6PCS

- NOTE:
1. TOTAL LENGTH: L
 2. COLOR: BEIGE
 3. MOLED TYPE
 4. 360° SOLDER
 5. ROHS COMPLIANT
- | ITEM NO. | L |
|----------|-------------|
| AK3815XF | 15000±100mm |
| AK3820XF | 20000±100mm |

ROHS
Compliant

DATE	16 JUL, 2001	PARTS NO	MN3271N
UNIT	MM	DRAWN NO	001525
SCALE		BUYER NO	002

TITLE: HD15 MALE-HD15 MALE W/2*FERRITE (MOLED TYPE)

NO.	DESCRIPTION	QTY
④	THUMBSCREW: #4-40UNC, E32	4
③	FERRITE CORE: RH16x28x9	2
②	#28, UL2919, 3COAX+7C+B, O.D:8.5, BEIGE	L
①	HD15M, 9th EMPTY, BLACK	2

DRAWN	Y.C.C	CHECK	APPRO
	7/16		

ASSMANN ELECTRONICS, INC.