

## LFS SERIES

### PADDLE FLOW SWITCHES



The LFS range of flow switches are paddle devices that are mounted vertically through a socket or upstand process connection.

Electrical connections are made within the housing, which has a screw on sealed lid and cable gland.

A choice of paddle sizes is supplied with each switch and selection can be made with reference to the chart below.

#### Features

- Stainless steel SS304 paddle
- 3/4" BSP or 1" NPT mounting plug thread
- IP65 Aluminium alloy housing or DIN 43650 connection
- Use for flow detection in pipes from 1" bore to 3" bore
- Maximum operating pressure 20 bar

## SPECIFICATIONS

### Technical

<b>Housing material</b>	Aluminium Alloy	Paddle material	304grade SS
<b>Temperature range</b>	See chart below	Maximum pressure	20 bar
<b>Set point tolerance</b>	±25 %	Pressure drop	0.2 bar
<b>Repeatability</b>	±5%	Connection in housing or by DIN 43650	

### Electrical

<b>Contact Form</b>		SPDT
<b>Switching Power Max</b>	VA	40
<b>Switching Voltage AC/DC Max</b>	V	230
<b>Switching Current Max</b>	A	1.0

All ratings are for resistive load only.

## STANDARD PARTS

Standard Parts	Mounting thread	Operating Temperature	Connection
<b>LFS-01</b>	1" NPT	-30 to +75°C	Terminate in housing
<b>LFS-01H</b>	1" NPT	-30 to +150°C	Terminate in housing
<b>LFS-02</b>	3/4" BSP	-30 to +75°C	Terminate in housing
<b>LFS-02H</b>	3/4" BSP	-30 to +150°C	Terminate in housing
<b>LFS-03</b>	1" NPT	-30 to +75°C	DIN 43650
<b>LFS-03H</b>	1" NPT	-30 to +120°C	DIN 43650
<b>LFS-04</b>	3/4" BSP	-30 to +75°C	DIN 43650
<b>LFS-04H</b>	3/4" BSP	-30 to +120°C	DIN 43650


Pipe Dia	1"		1.25"		1.50"		2"		2.5"		3"	
Switch	Op	Rel	Op	Rel	Op	Rel	Op	Rel	Op	Rel	Op	Rel
Paddle length												
1"	19	15	32	25	46	34	64	57				
1.25"			25	17	34	27	57	46	87	76		
1.50"					53	38	87	61	121	95		
2"							68	46	91	64	125	102
2.5"									76	49	102	121
3"											83	61

NB: Flow rates in litres per minute

Wiring Detail (LFS 03/04):-  
 Pin 1 = Common  
 Pin 2 = Make on flow (N/O)  
 Pin 3 = Break on flow (N/C)



## DIMENSIONS

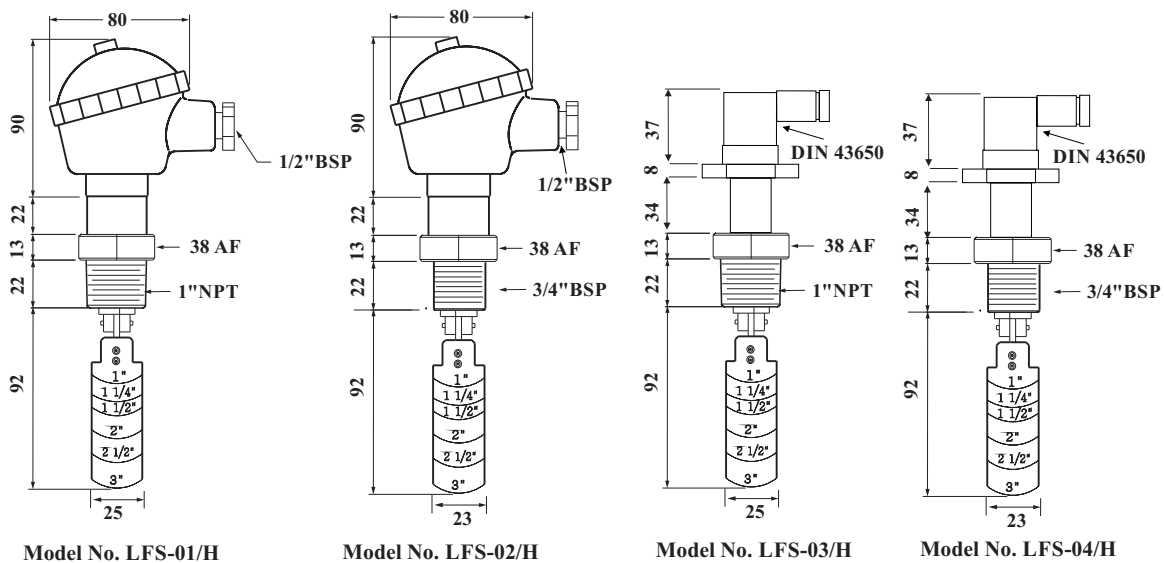

Made in the UK

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

Cynergy3 Components Ltd.  
 7 Cobham Road,  
 Ferndown Industrial Estate,  
 Wimborne, Dorset,  
 BH21 7PE, United Kingdom