

Electronic housing - DCS 15 M C O SLV C 7035 - 2203190

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Display housing, 15", light gray, central window, front level, with ventilation slots, cutout for connection technology angle plate, and VESA mount consisting of two half shells with screws

Your advantages

- ✔ Item belongs to the DCS product range
- ✔ Display housings for mobile and stationary operator panels
- ✔ Integration of TFT display and membrane keypads
- ✔ Degree of protection: up to IP54
- ✔ Temperature range: -20°C to +50°C
- ✔ Shock-resistant ABS plastic
- ✔ Flammability rating UL 94-V0



Key Commercial Data

Packing unit	4 pc
GTIN	 4 055626 378442
GTIN	4055626378442

Technical data

Item properties

Type	DCS 15 M C O SLV C 7035
Order No.	2203190
Housing type	Display housing
Battery compartment	no
Wall fastening	VESA 75/100
Ventilation openings present	yes

Measurements

Width [w]	362 mm
Height [h]	286 mm

Electronic housing - DCS 15 M C O SLV C 7035 - 2203190

Technical data

Measurements

Depth [d]	62 mm
Diagonal	15 in. (Window for display)
Dimensions	306 mm x 230 mm (Window for display, center position)

Material specifications

Flammability rating according to UL 94	V0
Housing material	ABS

Packaging information

Pieces per package	4
Denomination packing units	Pcs.


Standards and regulations

Flammability rating according to UL 94	V0
--	----

Drawings

Electronic housing - DCS 15 M C O SLV C 7035 - 2203190

Dimensional drawing

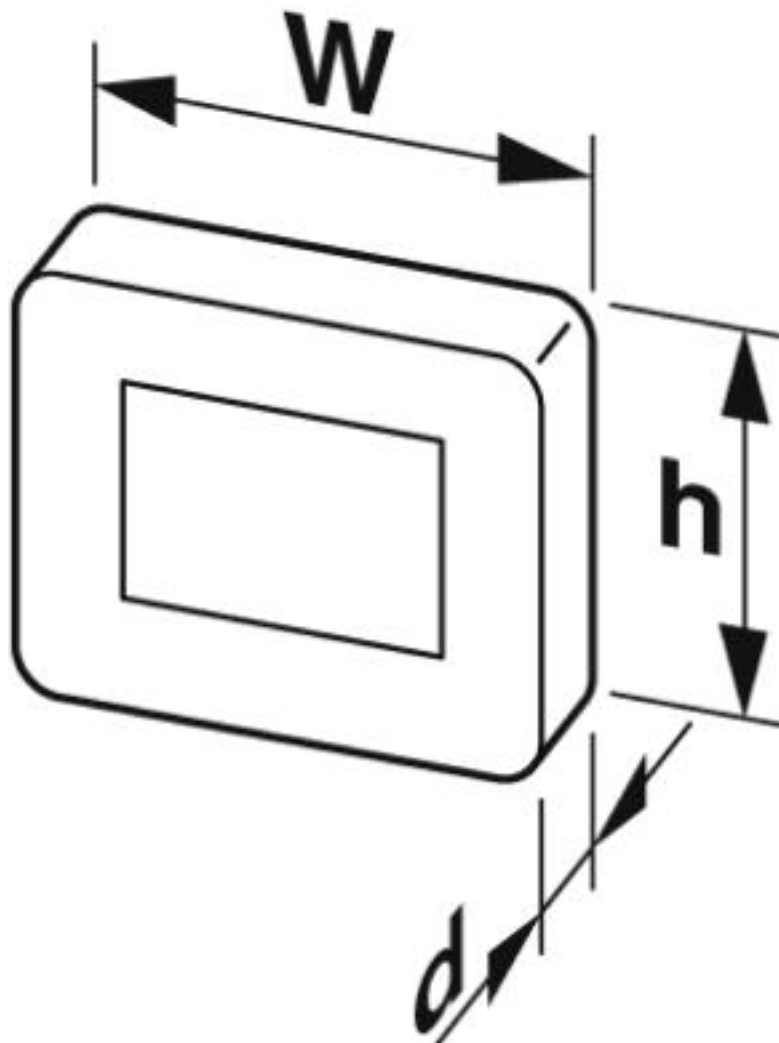

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>