

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334810201	MX150 ASSY 1.5 BLD 1X2 BLK A/2	2	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	4	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

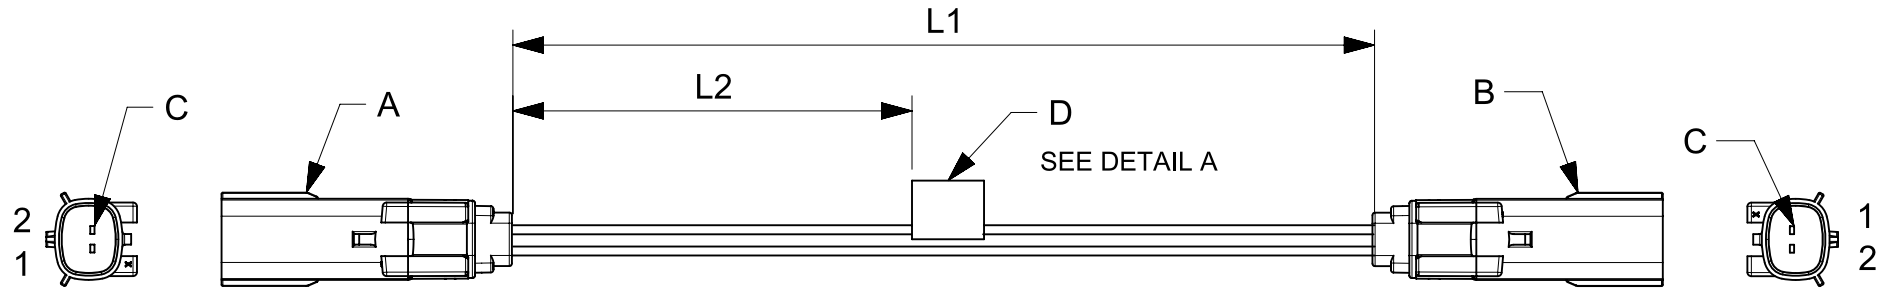


TABLE			
PART NUMBER	L1	L2	TITLE
2162821021	150±8	63 REF	MX150 P-P SR 2ckt 150mm Sn sealed cable
2162821022	300±10	138 REF	MX150 P-P SR 2ckt 300mm Sn sealed cable
2162821023	600±10	288 REF	MX150 P-P SR 2ckt 600mm Sn sealed cable

NOTES

1. Connector assembly must pass 100% continuity and polarity test.
2. Sealing must pass the IP67 rating as defined by product specification.
3. Connector view shown is from mating side.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 643544		
	mm	NTS	DRWN: NNANKOLA 2020/06/29		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		2020/08/31		
ANGULAR TOL ± °		CHK'D: SD 2020/08/31		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		APPR: SD 2020/08/31			
3 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER 2162821021	
2 PLACES ±		DRWN: NNANKOLA 2020/06/29			
1 PLACE ±		APPR: SD 2020/08/31		DOC TYPE PSD	
0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOC PART 000	
THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	REVISION A
		A4-SIZE	216282	SEE TABLE	GENERAL MARKET
				CUSTOMER	SHEET NUMBER
				GENERAL MARKET	1 OF 1