
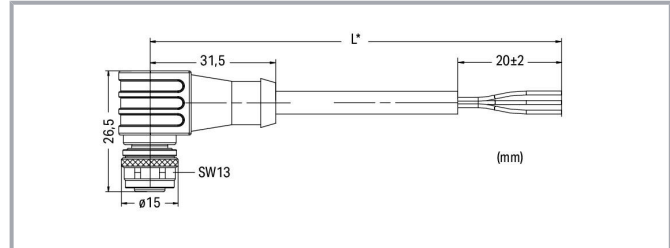


Data sheet | Item number: 756-5302/030-015

Sensor/Actuator cable; M12A socket; angled; 3-pole; Length: 1.5 m


www.wago.com/756-5302/030-015

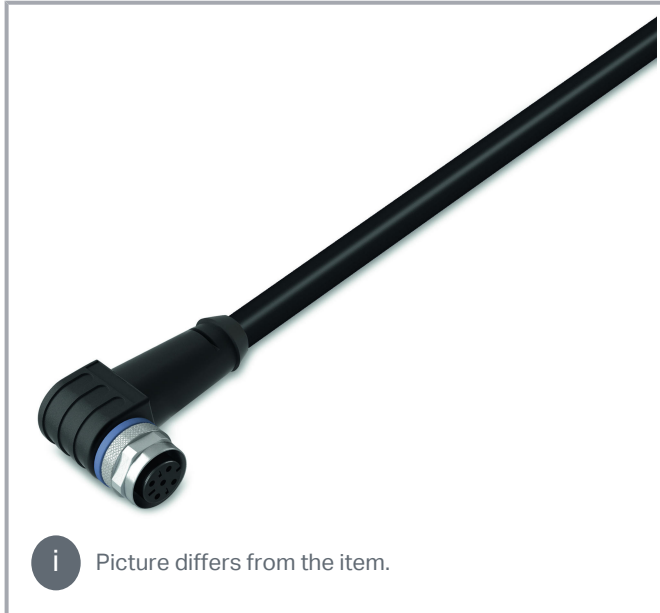

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

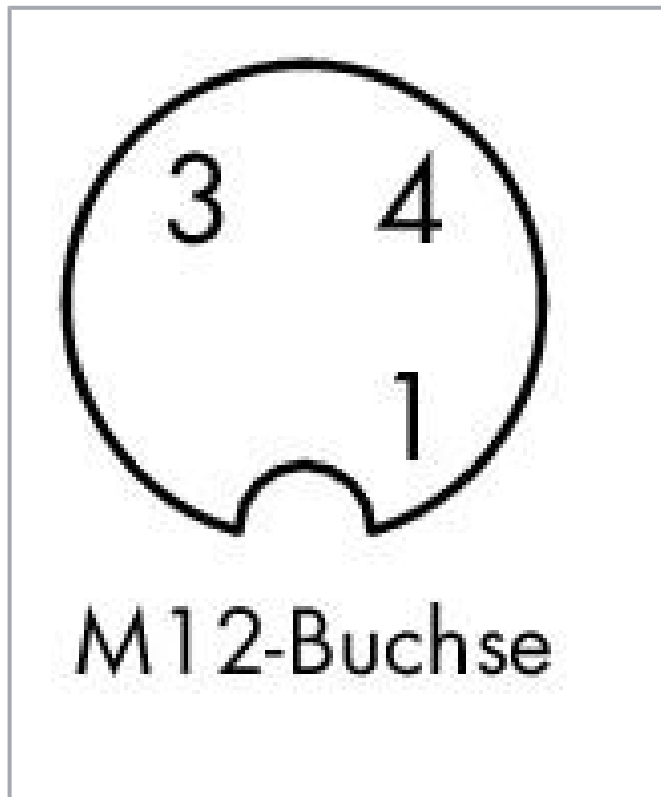

Pin 1 ... 5: 0,34 mm ²	
1	braun (+)
2	weiß (Ö)
3	blau (-)
4	schwarz (S)
5	grau
Schirm	

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

Connection type	M12 socket - free end
Pole No.	3
Cable connection direction to mating direction	90°
Connector interface coding (cable/adaptor) 1 1	A-coded
Cable length	1.5 m
Operating voltage	250 VAC/DC

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Operating current	4 A
Rated surge voltage	2.5 kV

Mechanical data

Bending cycles	2 Mio.
Drag chain suitability	yes
Sheathed cable color	black
Sheathed cable diameter	4.1 ... 4.5 mm
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Halogen-free	Yes
Housing material	Polyurethane (PUR)
Contact material	CuSn
Contact plating	CuNi/Au
Tightening torque	1 Nm
Weight	47.9 g

Environmental requirements


Surrounding air (operating) temperature (dynamic)	-25 ... +90 °C
Surrounding air (operating) temperature (static)	-50 ... +90 °C
Protection type	IP67
Pollution degree (5)	3 per VDE 0110

Commercial data

PU (SPU)	10 Stück
Packaging type	box
Country of origin	HU
GTIN	4044918974899
Customs tariff number	85444290900

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!



Downloads

Documentation

Bid Text

756-5302/030-015 X81 - Datei	Feb 19, 2019	xml 3.3 kB	Download
---------------------------------	--------------	---------------	----------

756-5302/030-015 doc - Datei	Sep 20, 2017	doc 26.1 kB	Download
---------------------------------	--------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors		pdf 293.9 kB	Download
--------------------------------------	--	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5302/030-015		URL	Download
---------------------------------	--	-----	----------

WSCAD Universe 756-5302/030-015		URL	Download
---------------------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5302/030-015 Sensor/Actuator cable; M12A socket; angled; 3-pole; Length: 1.5 m		URL	Download
--	--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!