



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES IN PART OR WHOLE WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REVISONS		DATE	APPROVED
REV.	DESCRIPTION		
A	NEW RELEASE	09/Aug/2009	
A1	ADD LENGTH 75FT	24/Dec/2009	
A2	ADD LENGTH 202mm & 1.5FT	30/Jun/2018	
A3	ADD LENGTH 50FT	12/Jun/2019	

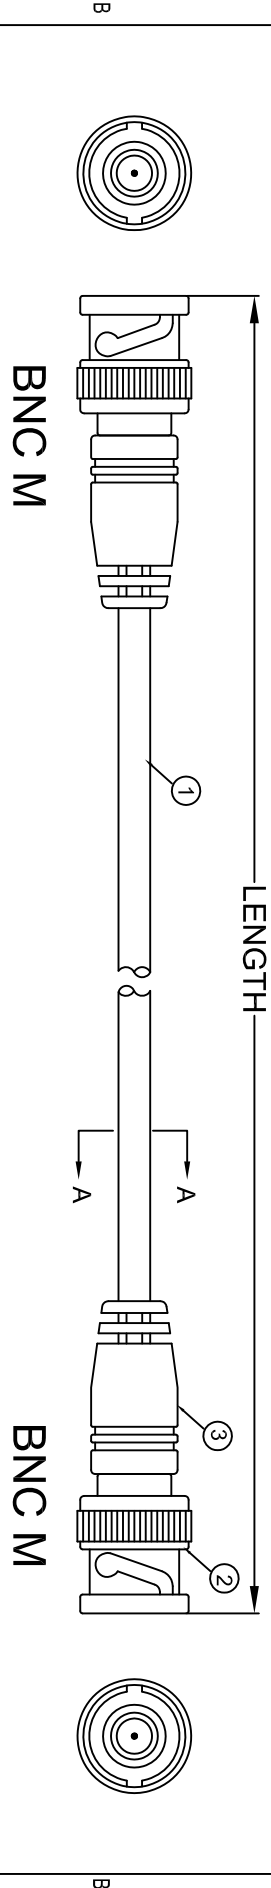


LENGTH & P/N Table

LENGTH	P/N
202mm+10/-0mm	CO-174BNCX200-202mm
1FT(305±20mm)	CO-174BNCX200-001
1.5FT(457.2±20mm)	CO-174BNCX200-001.5
2FT(610±30mm)	CO-174BNCX200-002
3FT(914±30mm)	CO-174BNCX200-003
4FT(1219±30mm)	CO-174BNCX200-004
5FT(1524±30mm)	CO-174BNCX200-005
7.5FT(2286±40mm)	CO-174BNCX200-007.5
10FT(3048±40mm)	CO-174BNCX200-010
12FT(3658±50mm)	CO-174BNCX200-012
15FT(4572±50mm)	CO-174BNCX200-015
25FT(7620±100mm)	CO-174BNCX200-025
35FT(10668±100mm)	CO-174BNCX200-035
50FT(15240±100mm)	CO-174BNCX200-050
75FT(22860±100mm)	CO-174BNCX200-075



SECTION A-A

- NOTES:
- CABLE:[26AWG(7/0.16±0.008mm)*1C +BRAID(16*4/0.12±0.008mm)]TINNEE COPPER INSULATION:PE OD= 1.52±0.07mm ;COLOR:TRANSPARENT JACKET:HALF MATTE PVC LOW TOXIC;OD=Ø2.54±0.10mm COLOR:UL813 BLACK.
 - MARKING:RG-174/U COAXIAL CABLE RoHS
 - CONNECTOR:BNC Male NICKEL-PLATED
 - MOLDING SR:45Pa PVC BLACK
 - OPEN/SHORT MISS WIRE TEST 100%
 - CONDUCTOR RESISTANCE ≤ 150Ω/km
 - INSULATION RESISTANCE ≥ 2MΩ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH RoHS STANDARD.

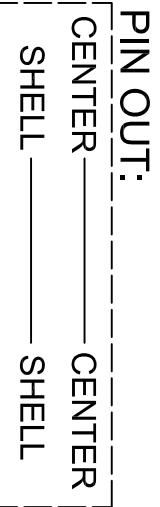

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		Amphenol Cables on Demand	
DECIMALS	±.X	ANGLES	±.X°	APPROVALS	DATE
X	±.XX			DRAWN	09/Aug/2009
XX	±.XXX			CHECKED	09/Aug/2009
XXX	±.XXX			RESP' ENG	
THIRD ANGLE PROJECTION		MFG ENG		SIZE DWG. NO.	
				CO-174BNCX200-XXX	
				RG174/U BNC M/BNC M	
				20 VALLEY ST. ENDICOTT, NY 13760	
				SCALE	
				SHEET OF	
				REV. A3	

NOTES: UNLESS OTHERWISE SPECIFIED