


Cat5e 350 MHz Outdoor-Rated Molded (UTP) Ethernet Cable (RJ45 M/M), PoE - Gray, 150 ft. (45.72 m)

MODEL NUMBER: **N007-150-GY**

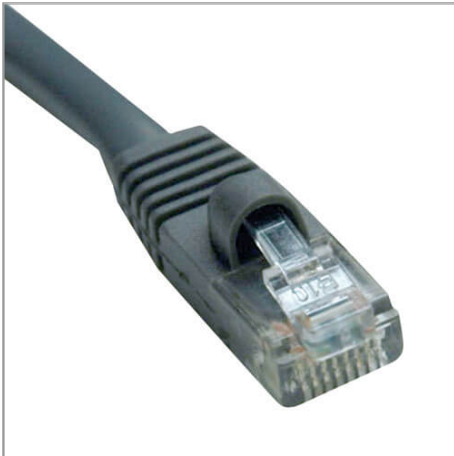

Highlights

- High Quality Outdoor Rated PVC Jacket
- Molded, Snagless RJ45 Connector

Package Includes

- 150-ft. (45.72 m) Outdoor Rated Cat5e Patch Cable

Description

Tripp Lite's line of Outdoor Rated Cat5e Patch Cables are manufactured with high quality UV (Ultra Violet) resistant PVC cable. With an operating temperature range of -40C to +60C (-40F to +140F), this 150-ft. (45.72 m) cable handles a wide range of weather conditions, most importantly, the degrading effects of Ultra Violet rays. Molded, snagless connectors provide a secure connection every time. Cables meet EIA/TIA 568-B.2, and are UL verified to Category 5e.

Features

- UV (Ultra Violet) Resistant Gray PVC jacket
- CMR, CMX, and UL444 Rated
- EIA/TIA 568-B.2 Compliant
- UL Verified Category 5e
- Molded, Snagless Connectors
- 4pr, Solid Conductors for long distance signal integrity

Specifications

| OVERVIEW | |
|--------------------------------|--------------|
| UPC Code | 037332140609 |
| Technology | Cat5/5e |
| POWER | |
| Power Over Cable (PoC) Support | No |

| PHYSICAL | |
|---------------------------------|---------------------------------|
| Cable Jacket Color | Gray |
| Cable Jacket Material | PVC |
| Cable Jacket Rating | CMR; CMX |
| Cable Shielding | UTP |
| Cable Outer Diameter (OD) | 5.5 mm |
| Number of Conductors | 4 Pair |
| Conductor Material | Solid Copper |
| Conductor Gauge | 24 AWG |
| Cable Length (ft.) | 150 |
| Cable Length (m) | 45.73 |
| Cable Length (in.) | 1800 |
| Cable Length (cm) | 4572 |
| Shipping Dimensions (hwd / in.) | 17.00 x 14.00 x 0.50 |
| Shipping Dimensions (hwd / cm) | 43.18 x 35.56 x 1.27 |
| Shipping Weight (lbs.) | 3.47 |
| Shipping Weight (kg) | 1.57 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 14° to 104°F (-10° to 40°C) |
| Storage Temperature Range | 5° to 122°F (-15° to 50°C) |
| Operating Humidity Range | 0% to 90% RH, Non-Condensing |
| Storage Humidity Range | 0% to 90% RH, Non-Condensing |
| COMMUNICATIONS | |
| Bandwidth per TIA Standard | 100 MHz |
| Maximum Bandwidth as Tested | 350 MHz |
| Network Compatibility | 1 Gbps (Gigabit) |
| IEEE Standards Supported | 802.3ab; 802.3at |
| CONNECTIONS | |
| Side A - Connector 1 | RJ45 (MALE) |
| Side B - Connector 1 | RJ45 (MALE) |
| Crossover Wiring | No |
| Contact Plating | Gold |
| PoE Type | Type 2 PoE+ (30W, IEEE 802.3at) |

| | |
|--------------------------------------|--|
| Connector Type | Molded |
| Wiring Configuration | EIA/TIA 568B |
| Angled Connector | No |
| FEATURES & SPECIFICATIONS | |
| Antibacterial | No |
| IP68 Rated | No |
| Snagless Connector | No |
| STANDARDS & COMPLIANCE | |
| Product Certifications | UL Listed; cUL Listed |
| Product Compliance | CE (Europe); RoHS; IEEE 802.3ab 1000Base-T; IEEE 802.3at PoE+; REACH; UKCA |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |