

# High Frequency Ceramic Solutions


Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805

P/N 1720BL15B0050

Detail Specification: 5/8/2017

Page 1 of 4

## General Specifications

Part Number	1720BL15B0050				
Frequency (MHz)	625 ~ 2815				
Unbalanced Impedance	50 Ω				
Balanced Impedance	50 Ω				
Insertion Loss	1.5 dB max.				
Return Loss	9.5 dB min.				
Phase Difference	180 ± 10 deg.				
Amplitude Difference	1.0 dB max.			Storage Temperature	-40 to +105°C
CMRR	20 dB min.			Storage Period	18 months max.
Power Capacity	2W max. (CW)			Recommended Storage Conditions of unused product on T&R	+5 to +35°C, 18 mos. max. Humidity 45~75% RH
Reel Quantity	4,000 pcs				
Operating Temperature	-40 to +105°C				


You can download measured s-parameters of this component at: <http://www.johansontechnology.com/baluns>

## Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	Eg. 1720BL15B0050S
		T & R	Suffix = E	Eg. 1720BL15B0050E
	Termination style	100% Tin	Suffix = None	Eg. 1720BL15B0050 (E or S)
	Evaluation Board	1720BL15B0050-EB1SMA (3 female SMA connectors)		


## Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +0.004/0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

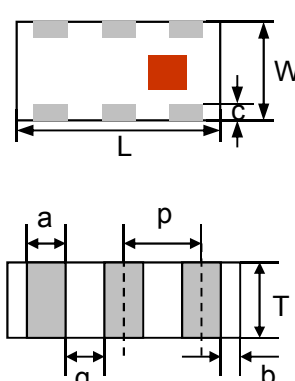

## Terminal Configuration

1	Unbalanced Port (IN)
2	GND or DC feed + RF GND
3	Balanced Port (OUT1)
4	Balanced Port (OUT2)
5	GND
6	NC



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.1

2017 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805

P/N 1720BL15B0050


Detail Specification: 5/8/2017

Page 2 of 4

## Mounting Considerations

Mount these devices with colored mark facing up.


\* Line width should be designed to provide 50ohm impedance matching characteristics.

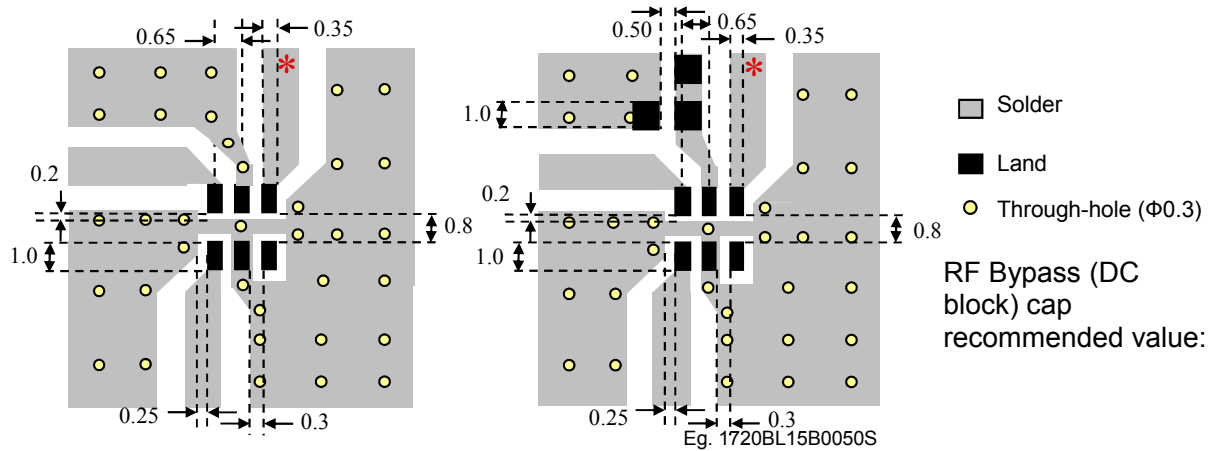

Need our help laying this out for you? Need the layout file?

Send us a message at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

## Measuring Diagram

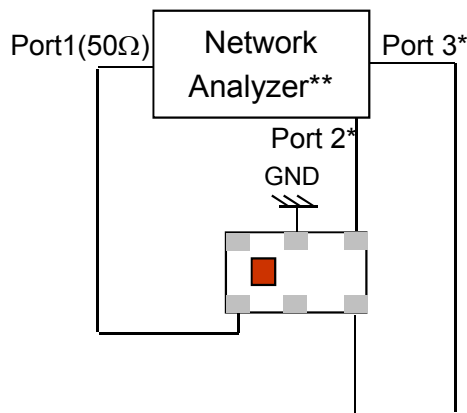

Port 1: Unbalanced Port  
 Ports 2 and 3: Balanced Port  
 $IL = S_{ds21}$   
 $RL = S_{ss11}$   
 $Amp\_balance = dB(S(2,1)/S(3,1))$   
 $Phase\_balance = Phase(S(2,1)/S(3,1))$

\*Impedance for ports 2 and 3 = Balanced Impedance/2

\*\*E5071B from Agilent

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.1

2017 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805


P/N 1720BL15B0050

Detail Specification: 5/8/2017


Page 3 of 4

## Typical Electrical Characteristics (T=25°C)

### Insertion and Return Loss

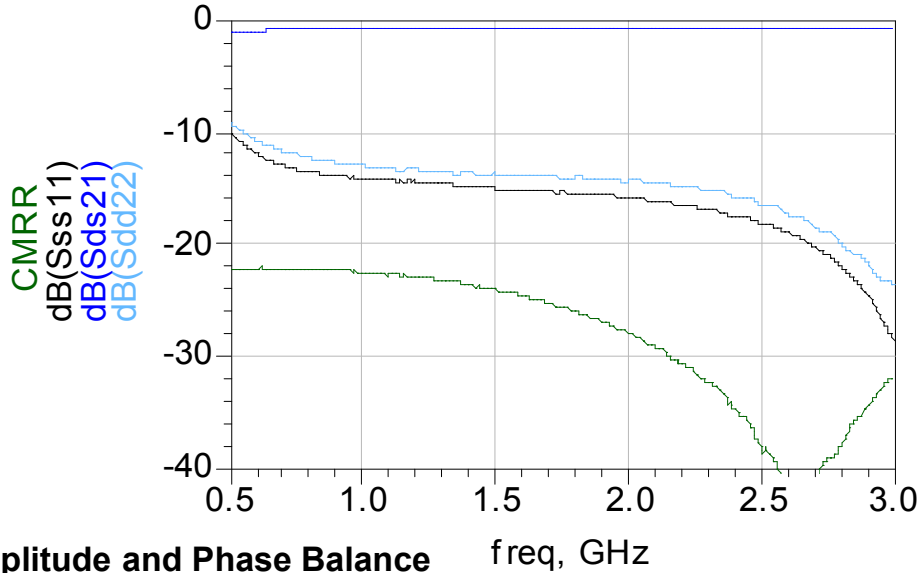

### Amplitude and Phase Balance

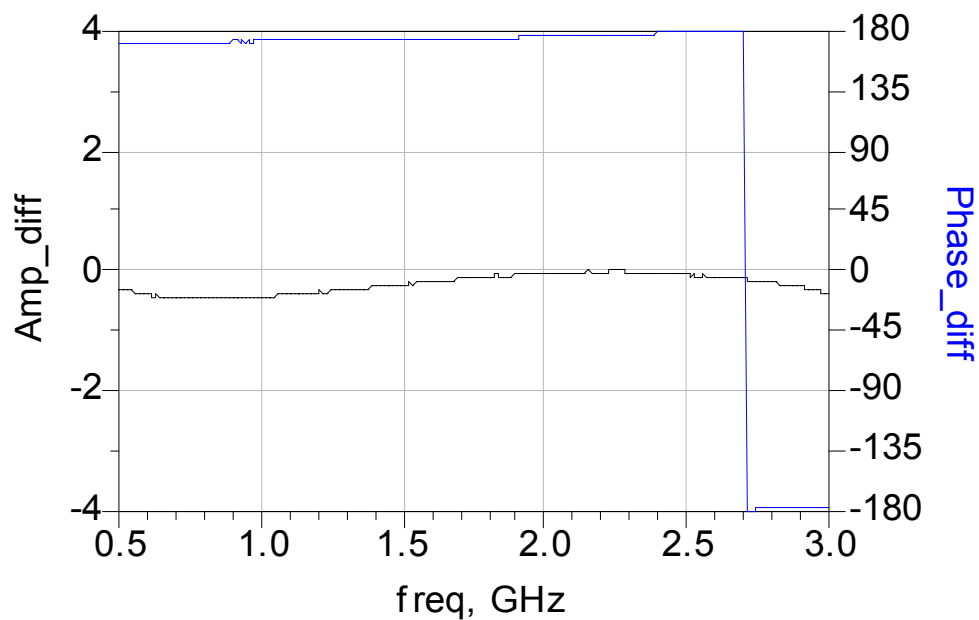

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.1

2017 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

**Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805**

**P/N 1720BL15B0050**

Detail Specification: 5/8/2017

Page 4 of 4

## More Filter-Balun info at:

<http://www.johansontechnology.com/baluns>

## Packaging information

[www.johansontechnology.com/tape-reel-packaging](http://www.johansontechnology.com/tape-reel-packaging)

## Soldering Information

[www.johansontechnology.com/typical-soldering-profile](http://www.johansontechnology.com/typical-soldering-profile)

## MSL Info

[www.johansontechnology.com/msl-rating](http://www.johansontechnology.com/msl-rating)

## Recommended Storage Condition and Max Shelf Life

[www.johansontechnology.com/recommended-storage-conditions](http://www.johansontechnology.com/recommended-storage-conditions)

## RoHS Compliance

[www.johansontechnology.com/rohs-compliance](http://www.johansontechnology.com/rohs-compliance)

## Layout review services

[www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

## Antenna layout review, tuning, and characterization services

[www.johansontechnology.com/ipc-antenna-services](http://www.johansontechnology.com/ipc-antenna-services)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.1

2017 Johanson Technology, Inc. All Rights Reserved