


Tool Specification

1. Part Number: YRS-1090
2. Terminal: SPND-002T-C0.5 / SPAD-002T-P0.5
3. Application

Crimp Position	AWG	Tensile Strength N (kgf)	Strip Length mm
28	UL1007 AWG 28	9.8(1.5) min.	2.1
26-24	UL1061 AWG 26	19.6(2.0) min.	2.1
26-24	UL1007 AWG 26	19.6(3.1) min.	2.1
26-24	(UL1007 AWG 24)	(29.4(3.0)min.)	2.1

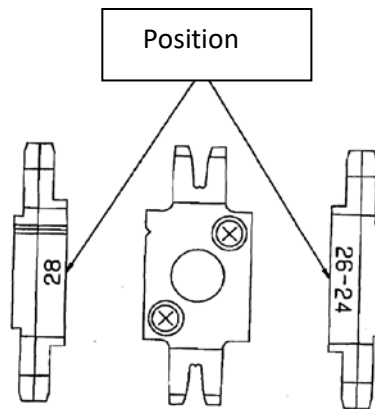

PART NUMBER	DESCRIPTION
YRS 7014-0969 CRIPMER ASSY	UPPER CRIPMER ASSEMBLY
YRS 7014-0973 ANVIL A	CONDUCTOR ANVIL
YRS 7014-0974 ANVIL B	INSULATION ANVIL
YRS 7014-0010 SHEAR BLADE	SHEAR BLADE

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in () above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for the type of wire listed and is not adjustable.