
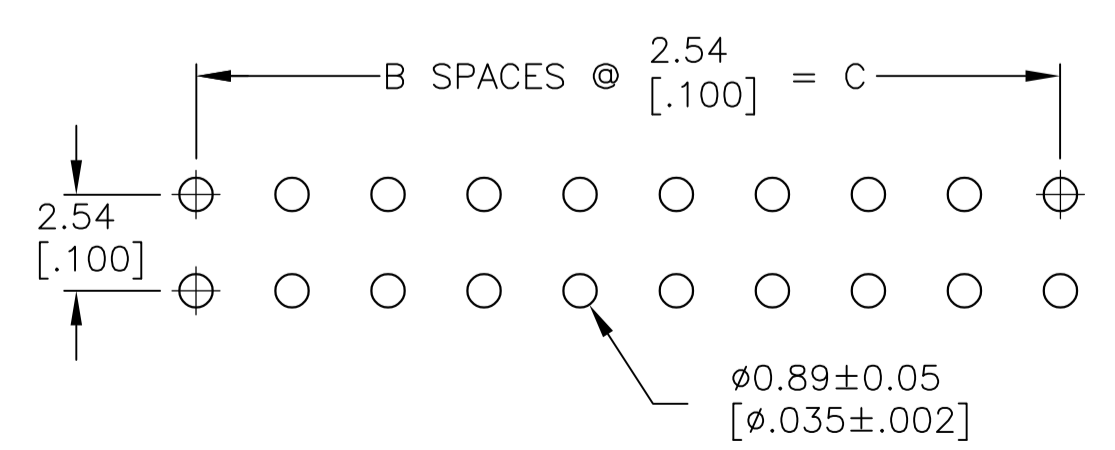
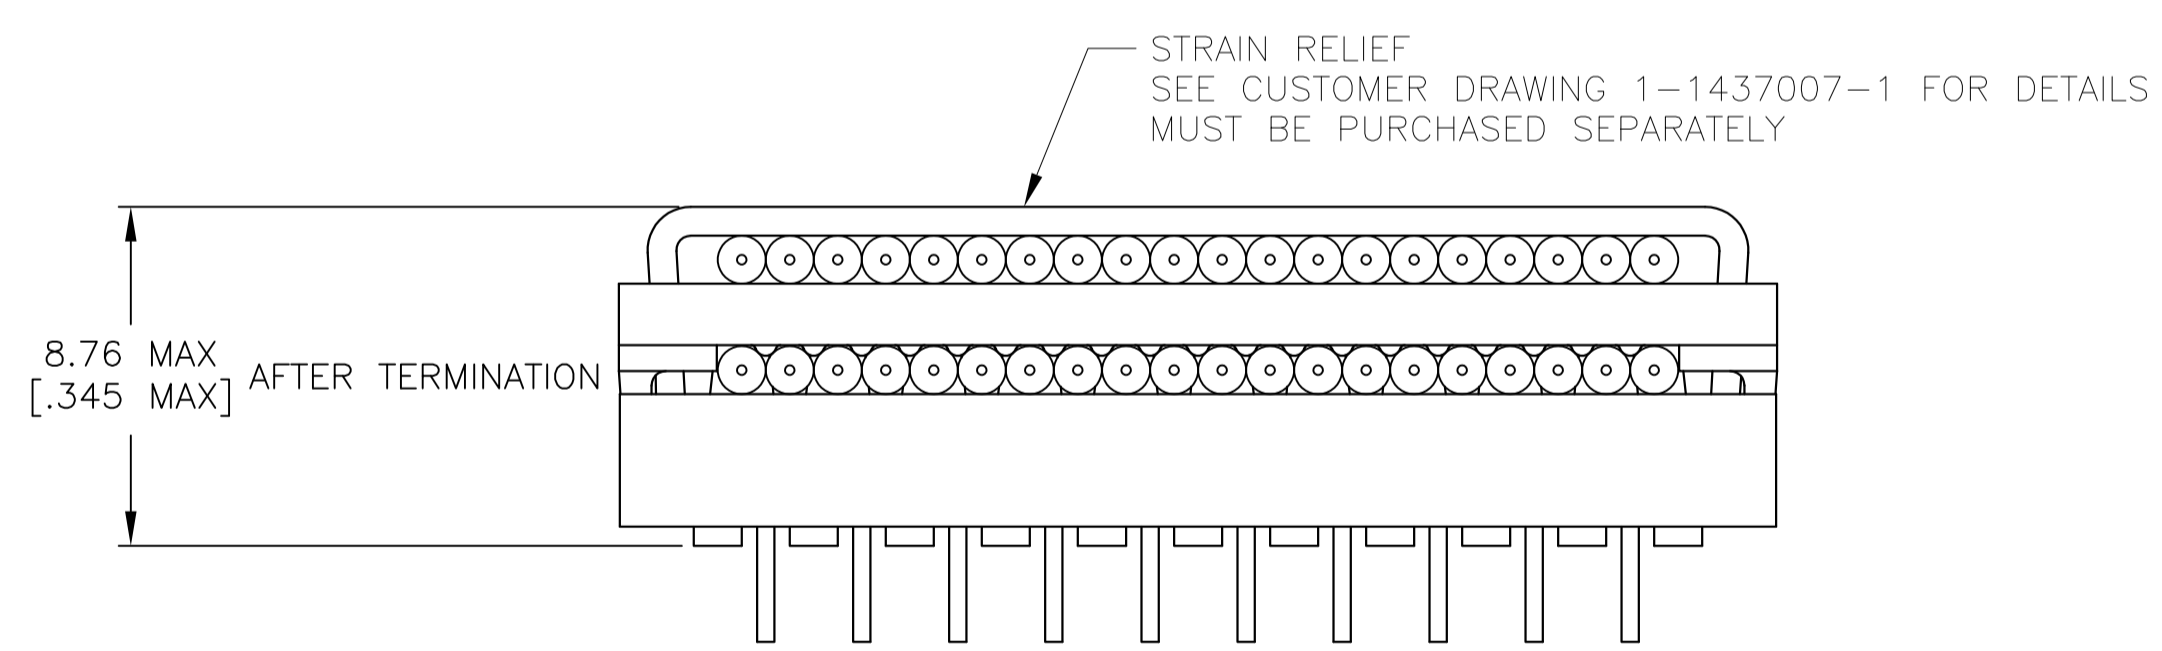
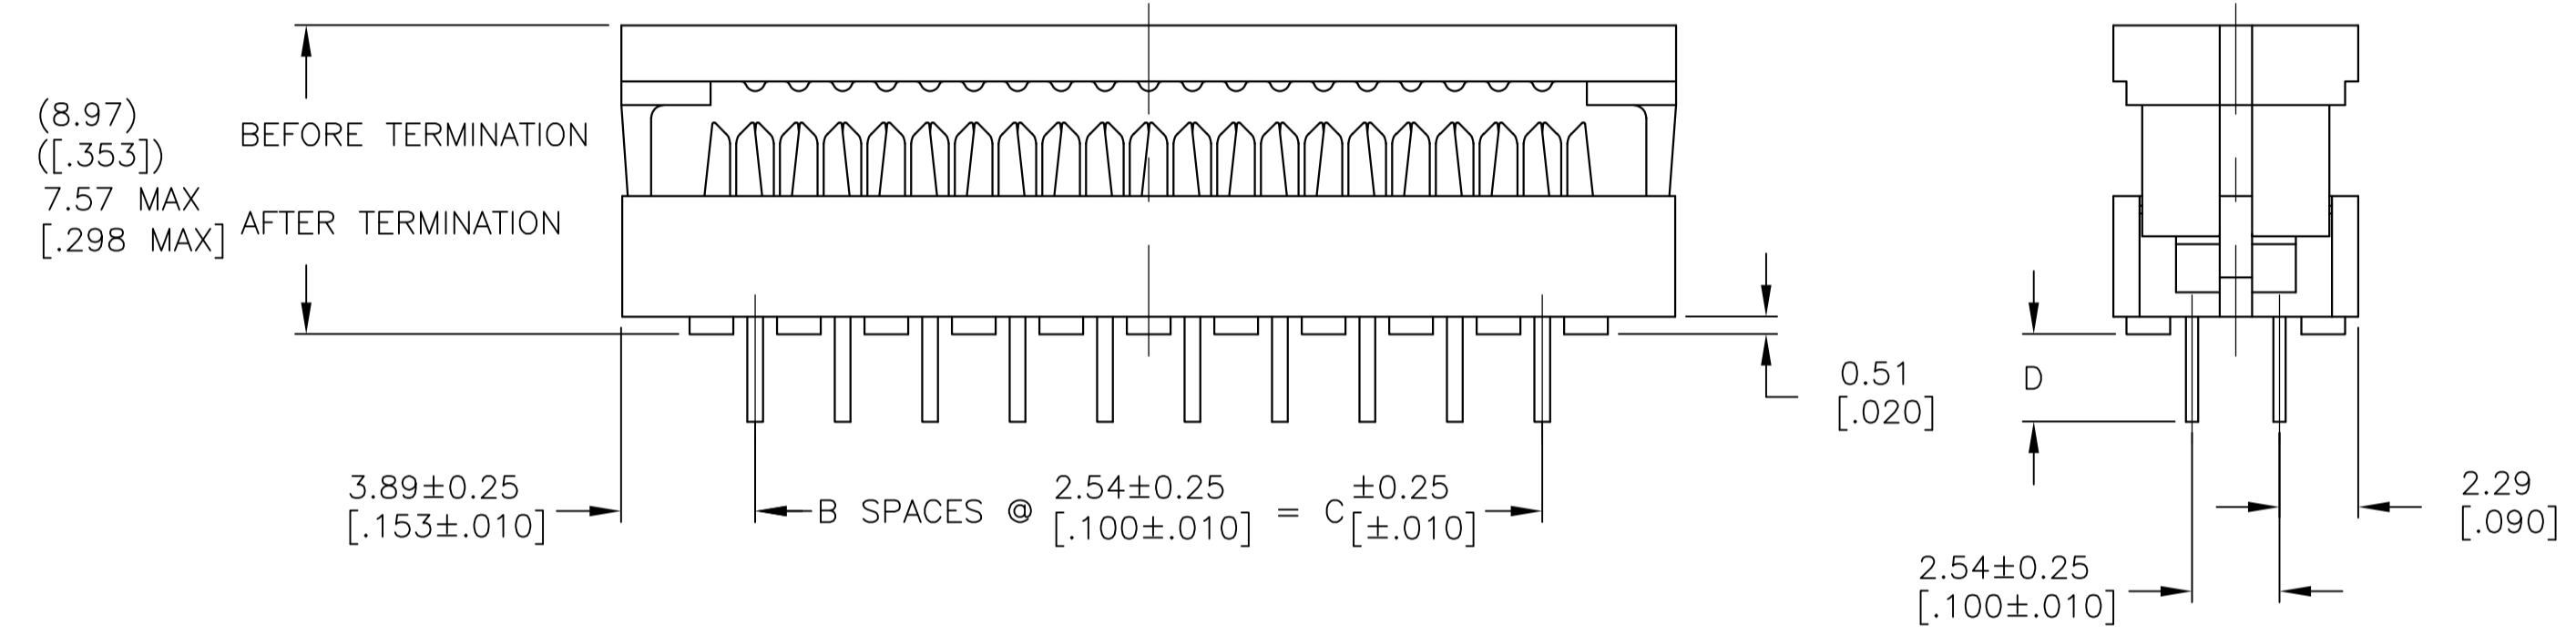


ELECTRICAL PROPERTIES	
CURRENT RATING	1 AMP
INSULATION RESISTANCE	>5 x 10 ⁹ OHMS @ 500 VDC
DWV	>1000 VRMS AT SEA LEVEL
ENVIRONMENTAL PROPERTIES	
TEMPERATURE RATING	-55°C TO 125°C

REVISONS		DATE	OWN	APPRO
P	LTR			
C	REVISED PER ECO-09-026142	19FEB2010	CR	CR

- 20 POSITION ASSEMBLY SHOWN.
- HOUSING AND COVER: GLASS REINFORCED POLYESTER, UL94V-0 RATED, COLOR BLUE.
- CONTACTS: BERYLLIUM COPPER.
- CONTACTS: 0.00254[.000100] MIN TIN-LEAD OVER 0.00127[.000050] MIN NICKEL.
- NOTCHES MAY OR MAY NOT BE PRESENT ALONG EDGES OF COVER OR HOUSING.
- OBSOLETE

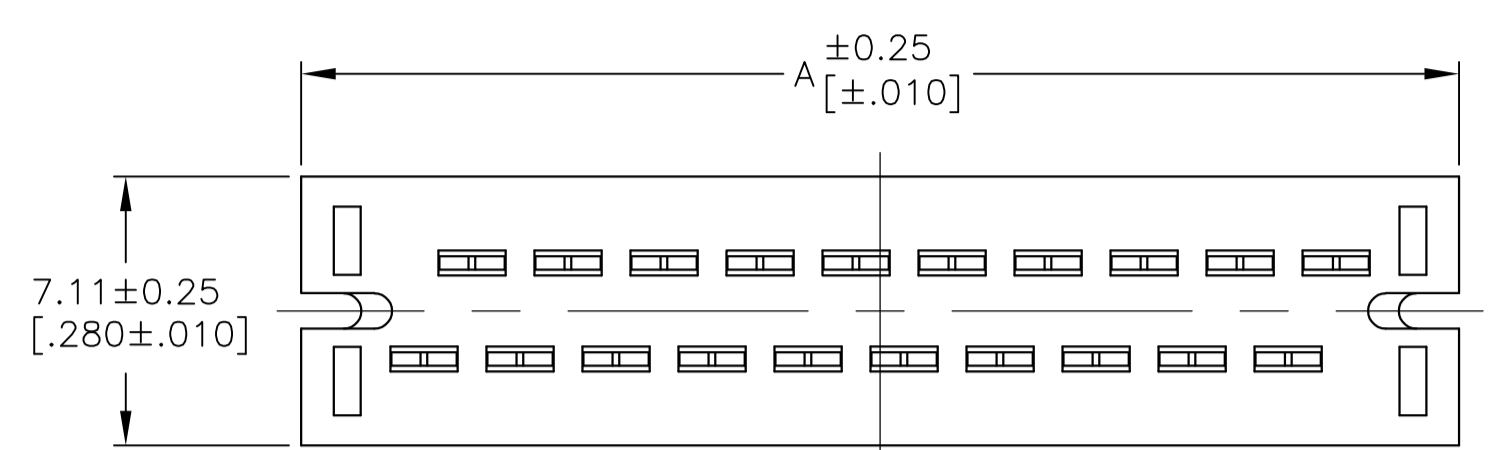

SUPERSEDED	2.54	78.74	31	86.51	64	622-6453	1437008-6
SUPERSEDED	2.54	73.66	29	81.43	60	622-6053	9-1437007-9
SUPERSEDED	2.54	60.96	24	68.73	50	622-5053	8-1437007-9
OBSOLETE	2.54	53.34	21	61.11	44	622-4453	8-1437007-5
SUPERSEDED	2.54	48.26	19	56.03	40	622-4053	7-1437007-7
	2.54	43.18	17	50.95	36	622-3653	7-1437007-3
SUPERSEDED	2.54	40.64	16	48.41	34	622-3453	6-1437007-5
OBSOLETE	2.54	35.56	14	43.33	30	622-3053	6-1437007-0
SUPERSEDED	2.54	30.48	12	38.25	26	622-2653	5-1437007-1
SUPERSEDED	2.54	27.94	11	35.71	24	622-2453	4-1437007-4
SUPERSEDED	2.54	22.86	9	30.63	20	622-2053	3-1437007-7
SUPERSEDED	2.54	17.78	7	25.55	16	622-1653	2-1437007-9
SUPERSEDED	2.54	15.24	6	23.01	14	622-1453	2-1437007-0
SUPERSEDED	2.54	10.16	4	17.93	10	622-1053	1-1437007-2
SUPERSEDED	2.54	7.62	3	15.39	8	622-0853	1437007-8
	3.96	5.08	2	12.85	6	622-0663	1437007-6
SUPERSEDED	2.54	5.08	2	12.85	6	622-0653	1437007-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	±	-
1. PLC	±	-
2. PLC	±	0.13[.005]
3. PLC	±	-
4. PLC	±	-
ANGLES	±	-

MATERIAL: FINISH:

APPROVED: J. GERACE, C. ROHDE, M. WALMSLEY

NAME: Tyco Electronics Corporation, Harrisburg, PA 17105-3608

PRODUCT SPEC: CONNECTOR ASSEMBLY, SLIMLINE PCB

APPLICATION SPEC: ---

SIZE: A1, CAGE CODE: 00779, DRAWING NO: 1437007-5

RESTRICTED TO: ---

CUSTOMER DRAWING, SCALE: 5:1, SHEET: 1 OF 1, REV: C