


Technical Data Sheet	<h1 style="color: red; margin: 0;">Rosenberger</h1>
-----------------------------	---

Cable assembly RPC-1.00 Plug – RTK 047 – WSMP Jack	<h2 style="margin: 0;">L70-323-XXX</h2>
--	---

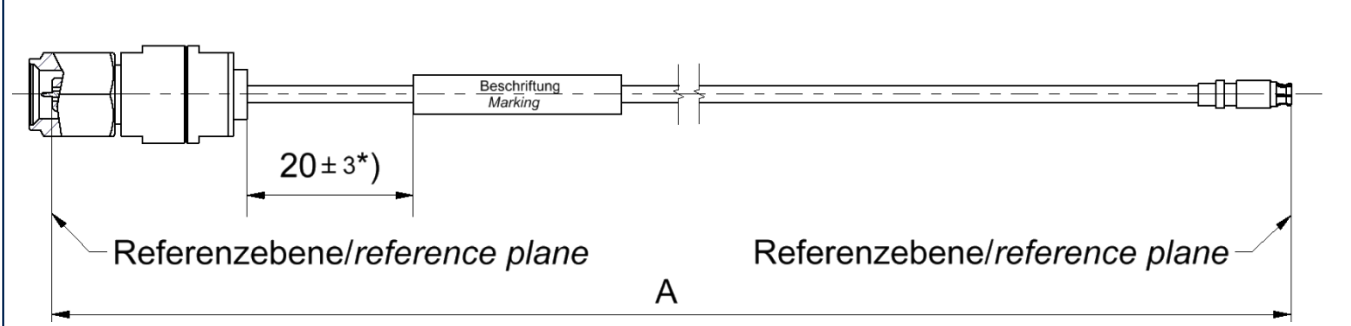

All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm
 *) If length "A" ≤ 90 mm marking is mount centric ± 5mm

Available variants

Type	max. Insertion loss	Marking	Weight (g) / pce
L70-323-XXX	$\leq 0.0026 * \sqrt{f[\text{GHz}]} \frac{\text{dB}}{\text{mm}} + 1.1 \text{ dB}$	ROSENBERGER YYYY-WW L70-323-XXX sssss	$0.0055 \frac{\text{g}}{\text{mm}} * A[\text{mm}] + 3.7\text{g}$

XXX – length in mm = A Maximum possible length = 6000mm
 WW – week YYYY – year sssss – serial no.

Note: Weight:
 First constant = Cable weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-1.00 Plug
Connector right	WSMP Jack
Cable	RTK 047
Armour	none

Electrical data

Impedance	50 Ω
Frequency	DC to 100 GHz
Return loss ¹	≥ 15 dB, DC to 18 GHz ≥ 10 dB, 18 to 50 GHz ≥ 8 dB, 50 to 70 GHz ≥ 7 dB, 70 to 100 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:
 Measurement plot with all 4 S – Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed.

¹ Return Loss and Insertion Loss includes the measurement adaptor

Mechanical data

Minimum bend radius:	
Single	20.0 mm

Environmental data

Temperature range	- 40 °C to +125 °C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Marcel Panicke	12.07.18	Markus Hantschel	14.12.22	b00	22-2195	Marion Striegler	14.12.22

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com	Tel. : +49 8684 18-0 Email : info@rosenberger.com	Page 1 / 1
--	--	---------------