




| | | | | |
|------|----------------|------------|-------|---------------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN-920547~550 | 2009/02/24 | Vicky | Update the drawing. |
| C | LEN1630329~332 | 2016/03/09 | Vicky | Update Logo |

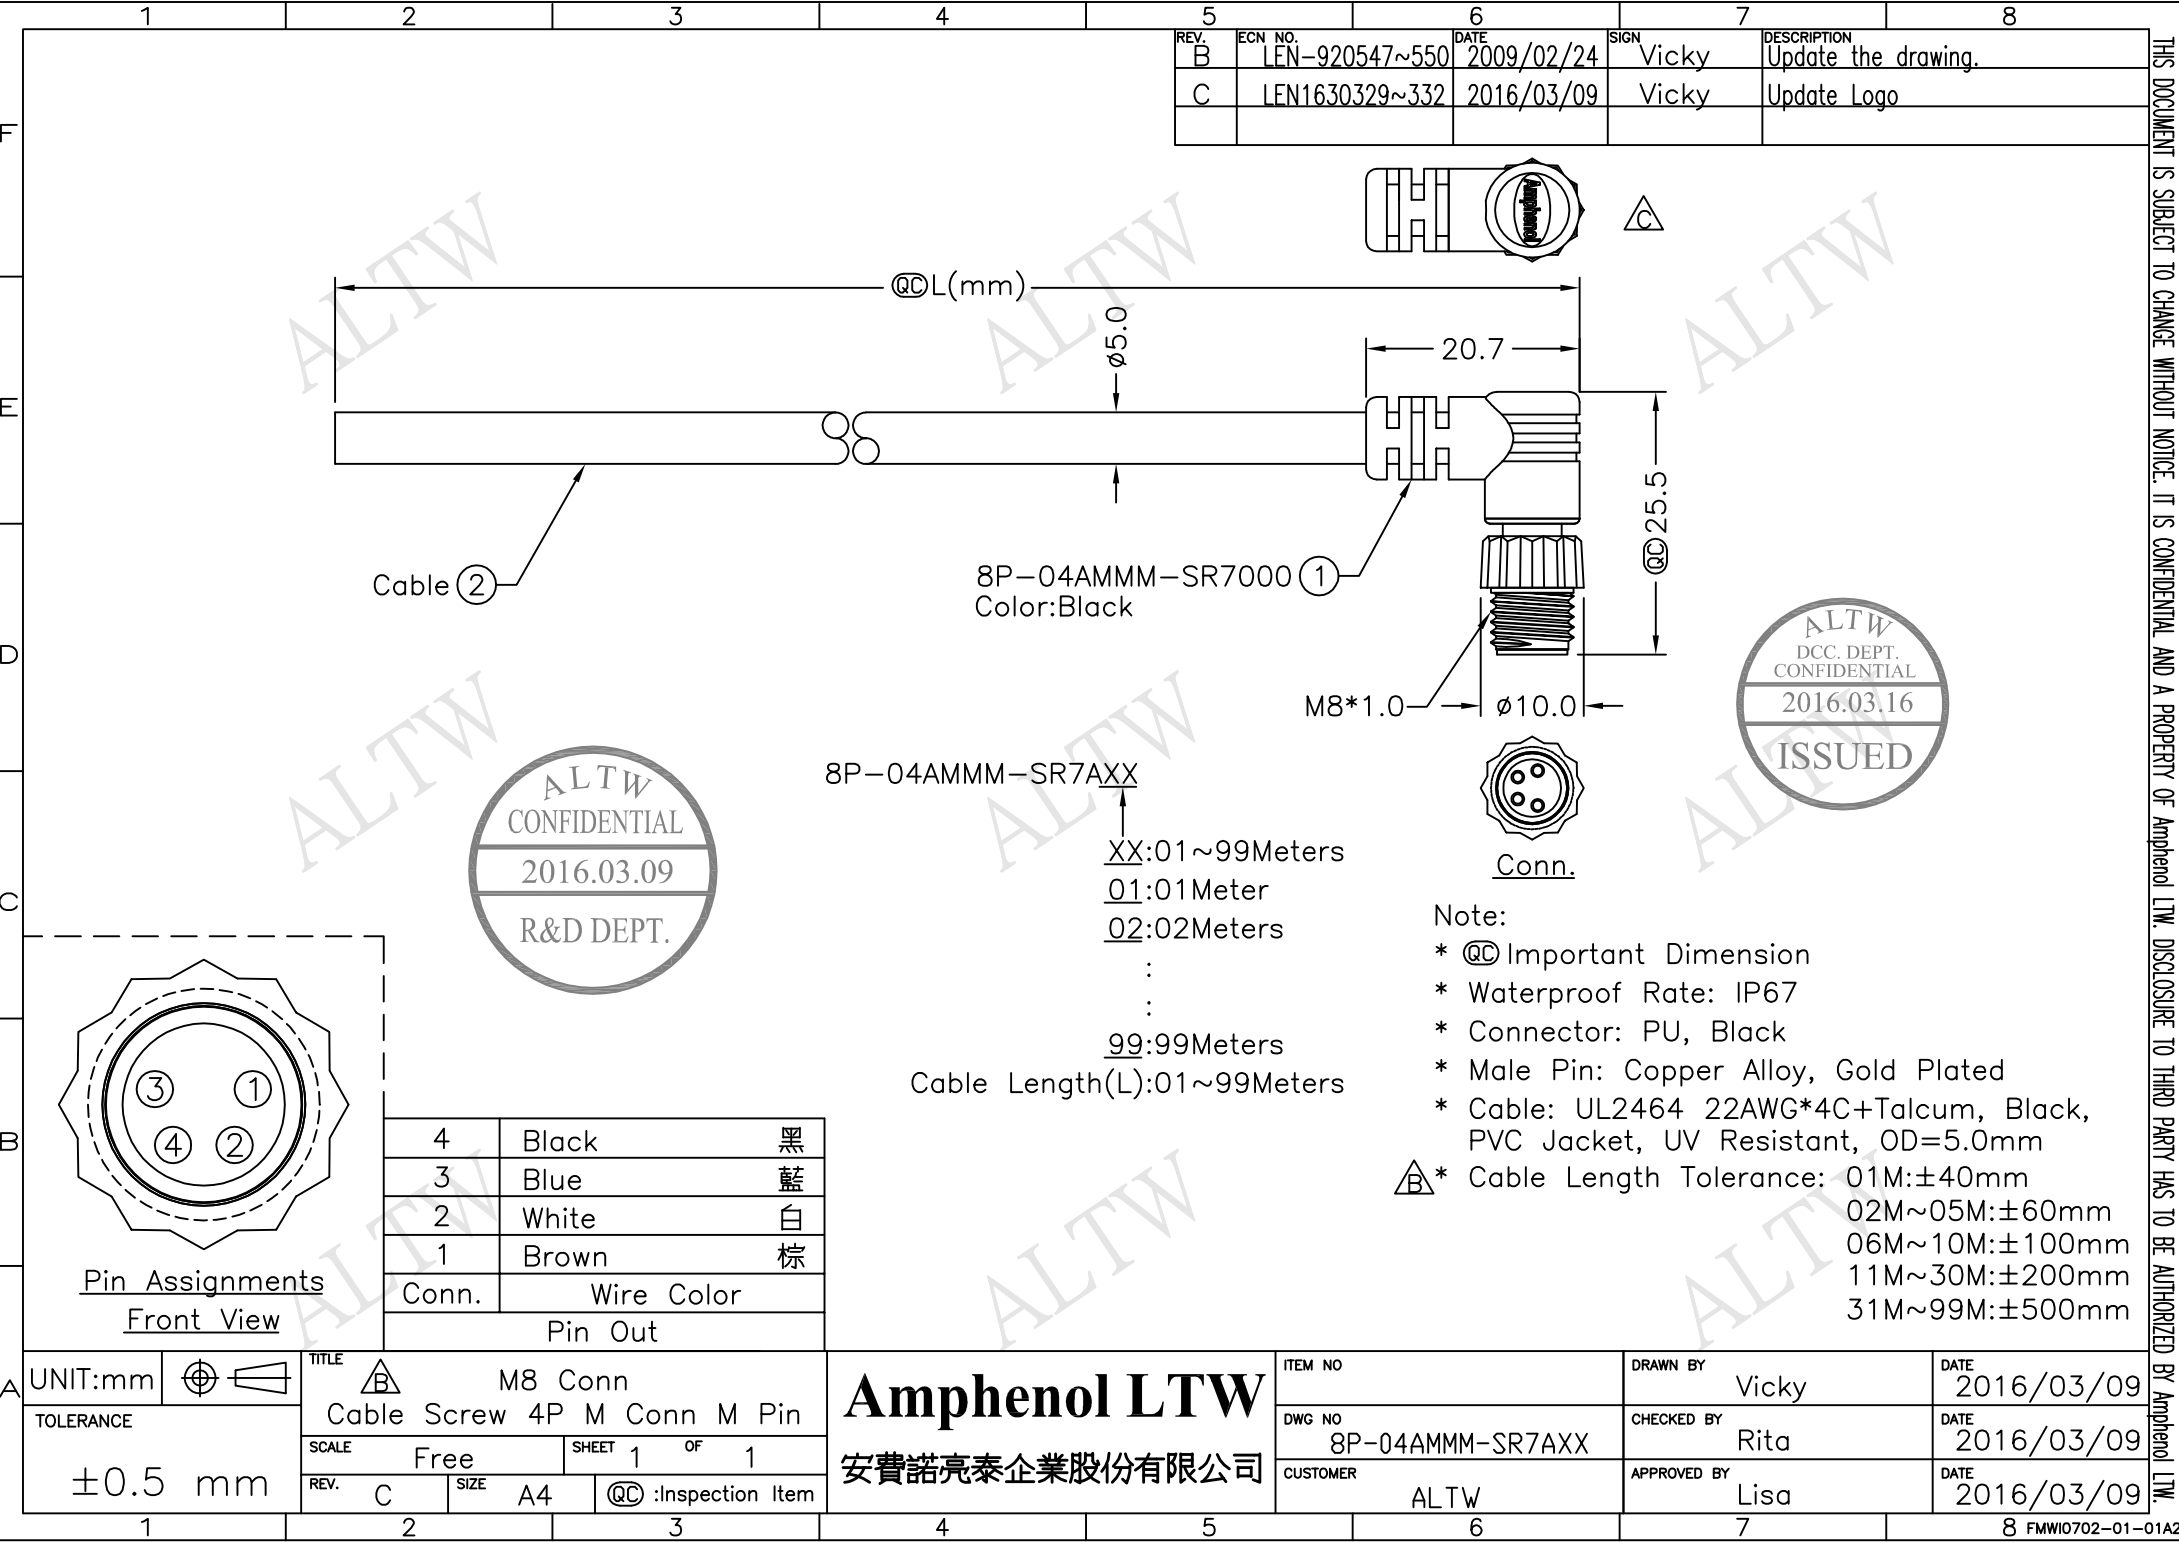

8P-04AMMM-SR7AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: PU, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 22AWG*4C+Talcum, Black, PVC Jacket, UV Resistant, OD=5.0mm
 - * Cable Length Tolerance:
 - 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm



Pin Assignments
Front View

| | | |
|-------|------------|---|
| 4 | Black | 黑 |
| 3 | Blue | 藍 |
| 2 | White | 白 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | |
| | Pin Out | |

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ±0.5 mm |

| | | |
|-------|-----------------------------|---------------------|
| TITLE | M8 Conn | |
| | Cable Screw 4P M Conn M Pin | |
| SCALE | Free | SHEET 1 OF 1 |
| REV. | C | SIZE A4 |
| | | @C :Inspection Item |

Amphenol LTW
 安費諾亮泰企業股份有限公司

| | | |
|------------------|-------------|------------|
| ITEM NO | DRAWN BY | DATE |
| DWG NO | CHECKED BY | DATE |
| CUSTOMER | APPROVED BY | DATE |
| | Vicky | 2016/03/09 |
| 8P-04AMMM-SR7AXX | Rita | 2016/03/09 |
| ALTW | Lisa | 2016/03/09 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.