


MAP140 Series

AC-DC Power Supplies

Bel Power Solutions MAP140 Series provides a full range of options with a universal input voltage from 85 to 264 VAC and power densities up to 2.6 watts/inch³, meets the most rigorous requirements of industrial, and datacom systems.

MAP140 series complies with EMC product standard EN 61204-3. All RoHS compliant units bear the CE Mark.

Rated for use in convection and forced-air cooled (200 LFM) applications, the MAP140 delivers dependable power with a Mean Time Between Failures (MTBF) in excess of 180,000 hours.

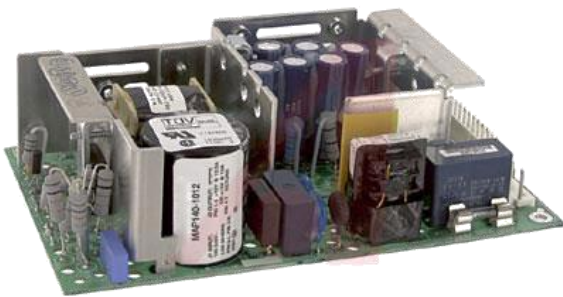

Key Features & Benefits

- Universal Input 85-264 VAC
- CE marked to Low Voltage Directive
- Industry-Standard Footprint: 7.0 x 4.3 x 1.8 inch (177.8 x 109.2 x 45.7 mm)
- Remote Sense and Overvoltage Protection
- Power Fail Signal Standard on MAP140-3000P, Optional on MAP140-1012 and MAP140-1024G
- Optional Overtemperature Protection, L-bracket and Cover
- RoHS Compliant
- CE marked to Low Voltage Directive
- Meets EMC Standards: EN 61204-3
EN 55032
EN 61000-3-2
EN 61000-3-3



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. SINGLE-OUTPUT MODEL SELECTION

MODEL ⁵	OUTPUT VOLTAGE	ADJUSTMENT RANGE	CONVECTION COOLED CURRENT	FORCED AIR CURRENT ¹	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE ²	INITIAL SETTING ACCURACY
MAP140-1012	12V/15V	11.0V to 16.0V	9.2/7.3A ³	12.5A/10A ³	0.1%	0.5%	1%	11.97V to 12.03V
MAP140-1024G	24V/28V	22.8V to 29.2V	4.6/4A ³	6.3A/5.4A ³	0.1%	0.5%	1%	23.95V to 24.05V
MAP140-1048	48V	45.6V to 54.0V	2.3A	3.1A	0.1%	0.5%	1%	47.9V to 48.1V

2. MULTIPLE-OUTPUT MODEL SELECTION – 80 W CONTINUOUS OUTPUT POWER

MODEL ⁵	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT ⁴	PEAK OUTPUT CURRENT ⁴	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE ²	INITIAL SETTING ACCURACY
MAP140-3000P	+5V	4.75V to 5.25V	16A/25A PK	20A/25A PK	0.2%	1%	1%	5.09V to 5.11V
	+12V	Fixed	4A/9A PK	4A/9A PK	0.1%	2%	1%	11.97V to 12.03V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	2%	1%	-11.4V to -12.6V

¹ With minimum 200 LFM forced air cooling.

² Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth.

³ MAP140-1012 output currents are expressed as 12V/15V operation. MAP140-1024G output currents are expressed as 24V/28V operation.

⁴ Peak loads up to 140 Watts for 60 seconds or less are acceptable, (10% duty cycle max.). Peak power must not exceed 140 watts.

⁵ Non-G models use lead solder, therefore are not recommended for applications in scope of RoHS.

Model numbers highlighted in yellow are EOL / Obsolete

3. INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range	85		264	VAC
Input Frequency	AC input	47		63	Hz
Brown Out Protection	Lowest AC input voltage that regulation is maintained with full rated loads.	85			VAC
Hold-up Time	Nominal AC input voltage (110VAC), full rated load.	110 watt load:	20		ms
		140 watt load:	16		
Input Current	85 VAC (140 W load) 110 VAC (140 W load)			2.5 2.0	A _{RMS}
Input Protection	Non-user serviceable internally located AC input line fuse.				
Inrush Surge Current	Internally limited by thermistor, V _{in} = 264 VAC (one cycle), 25° C			41	A _{PK}
Operating Frequency	Switching frequency of main transformer		22		kHz

4. OUTPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full load @110 VAC. Varies with distribution of loads among outputs		70% typical		
Minimum Loads	Single output models	0			Amps
	MAP140-3000P, total output current of V1 + V2 ⁶	2			
Ripple and Noise	Full load, 20 MHz bandwidth.	See Model Selection Chart			
	Single output models	See Model Selection Chart			
Output Power	MAP140-3000P with convection cooling			80	Watts
	MAP140-3000P with 200 LFM forced air cooling			140	Watts
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on / turn-off.			1	%
Regulation	Varies by output, regulation includes: line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load.	See Model Selection Chart			
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only on multiple output units).		500		µs
Turn-on Delay	Time required for initial output voltage stabilization.			1	Sec
	MAP140-3000P Single output models			2	
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.			20	ms

⁶ Minimum load is required only to meet the regulation limits of V3.

5. INTERFACE SIGNALS & INTERNAL PROTECTION

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	MAP140-3000P, V1	6.1		7.2	V
	Provided on single output models and V1 of MAP140-3000P.	17.3		20.2	
	MAP140-1012	32.2		37.8	
	MAP140-1024G MAP140-1048	55.2		64.8	
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.				
Remote Sense	Voltage drop compensated for at the load.			250	mV
Power Fail Warning	TTL compatible logic signal. Time before regulation dropout due to loss of input power at 140 watts, 110 VAC. Standard on MAP140-3000P and optional on MAP140-1012.	2.3			ms
Overtemperature Protection	Optional signal provides system shutdown due to excessive internal temperature. See options.				



Asia-Pacific +86 755 298 85888 Europe, Middle East +353 61 225 977 North America +1 408 785 5200

6. SAFETY SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards; UL/CSA 60950-1, IEC 62368-1 and EN 62368-1.				
Dielectric Withstand Voltage	Input to Chassis	2121			VDC
	Input to Output (tested by manufacturer only)	4242			
Insulation Resistance	Input to output	10			MΩ
Touch Current	EN 62368-1, 264 VAC	110 VAC		0.5	mA
		264 VAC		1.5	

7. EMC SPECIFICATIONS

MAP140 complies with EMC product standard EN 61204-3.

Conducted emissions EN 55032 Class B

Radiated emissions EN 55032 Class A

PHENOMENON	BASIC STANDARD	TEST ITEM	TEST SPECIFICATION	PERFORMANCE CRITERIA
Electrostatic discharge	EN 61000-4-2	Contact discharge	±4 kV	A*
Radio-frequency electromagnetic field Amplitude modulated	EN 61000-4-3	Frequency Field strength AM 1 kHz	80 - 1000 MHz 10 V/m 80%	B
			1,4 to 2 GHz 3 V/m 80%	
			2 to 2,7 GHz 1 V/m 80 %	
Fast transient	EN 61000-4-4	Line to ground voltage Tr/Th Repetition freq. Tr/Th	±2 kV 5/50 ns 100 kHz	A*
			1,2/50 μs	
Surges	EN 61000-4-5	Line to ground voltage Line to line voltage	±2 kV ±1 kV	A*
Conducted disturbances induced by radio-frequency fields	EN 61000-4-6	Frequency Amplitude AM 1 kHz	0,15 to 80 MHz 10 V 80 %	A
Power frequency magnetic field	EN 61000-4-8	Frequency Field strength	50, 60 Hz 30 A/m	A
Voltage dips	EN 61000-4-11	Residual voltage	0 % during 1/2 cycle 0 % during 1 cycle 40 % during 10/12 cycles at 50/60 Hz	A*
			70 % during 25/30 cycles at 50/60 Hz	
			80 % during 250/300 cycles at 50/60 Hz	
			0 % during 250/300 cycles at 50/60 Hz	
Voltage interruptions	EN 61000-4-11	Residual voltage	0 % during 250/300 cycles at 50/60 Hz	B*


* Exceeds product standard EN 61204-3

8. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating Non-operating			10k 40k	ASL Feet
Operating Temperature	Derate linearly above 50°C by 2.5% per °C	At 100% load: At 50% load:	0 0	50 70	°C
Storage Temperature		-40		85	°C
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up)		±0.02	±0.05	%/°C
Relative Humidity	Non-condensing			95	%RH
Shock	Operating, peak acceleration			20	G
Vibration	Random vibration, 10Hz to 2kHz, 3 axis			6	GRMS

9. MECHANICAL SPECIFICATIONS / OPTIONS

PARAMETER	CONDITIONS / DESCRIPTION
Dimensions	177.8 x 109.2 x 50.0 mm (7.00 x 4.30 x 1.97 inch)
Weight	0.59 kg (1.3 lbs)
Cover (Option)	Add 'C' suffix to model number (Please check with factory for availability). For convection cooled applications, derate output power to 75 watts, maximum. Dimensions: 182.9 x 106.7 x 50.0 mm (7.20 x 4.20 x 1.97 inch)
Power Fail Signal	Add 'P' suffix to model number. Provides 2.3mS warning time before main output drops 5%. Warning time increases at reduced load levels. Option available only on MAP140-1012 and MAP140-1024G. Power fail is standard on MAP140-3000P.
Thermal Shutdown	Add 'T' suffix to model number. Initiates shut-down in the event of an overtemperature condition. Automatic recovery. Where available, Power Fail signal is initiated prior to shutdown.

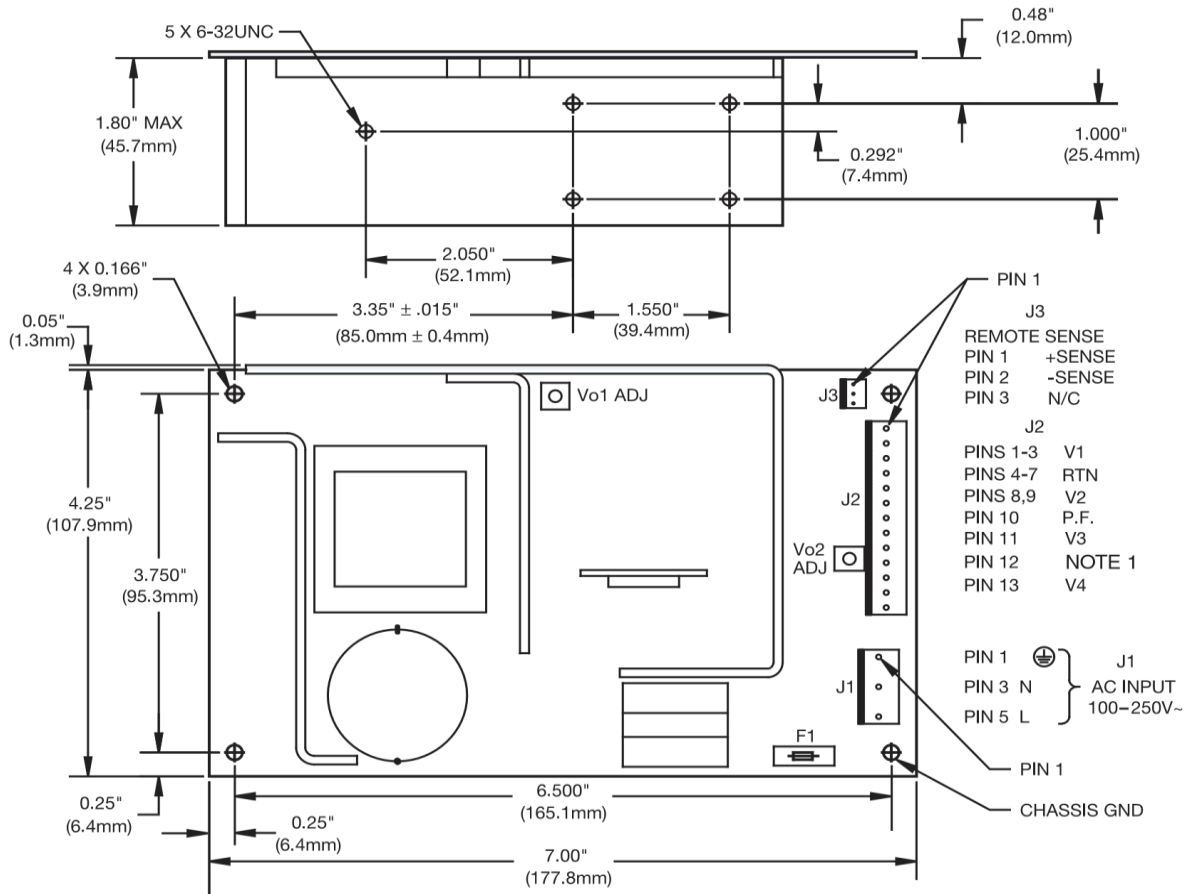

MOLEX PCB PIN CONNECTOR INFORMATION				
REF DESIG	SERIES	MOLEX P/N	SPACING	PINS, SQUARE
J1	41671 or	26-48-1055*	0.156 (3.96)	0.045 (1.14)
	41791	26-60-4050*	0.156 (3.96)	0.045 (1.14)
J2	41671 or	26-48-1135	0.156 (3.96)	0.045 (1.14)
	41791	26-60-4130	0.156 (3.96)	0.045 (1.14)
J3	6373	22-23-2031	0.100 (2.54)	0.025 (0.64)

*With pins 2 & 4 removed for double spacing.

NOTES:

- When the V4 output is a positive (+) output, pin 12 on J2 is connected to RTN.
When the V4 output is a negative (-) output, pin 12 on J2 is connected to V4.

Figure 1. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

