

6

5

4

3

2




1

APPROVED: _____

DATE: _____ TITLE: _____





Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/11	
A		ADDED DRAWING	12/25/18	AY/RC1

60, 64 PIN

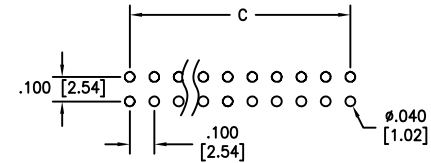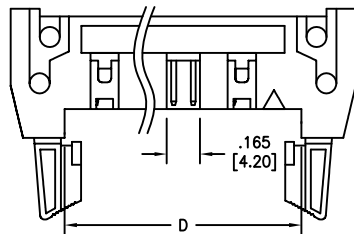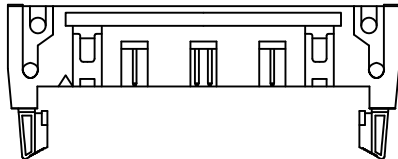


RECOMMENDED PCB LAYOUT

20, 24, 26, 30, 34, 40, 50 PIN

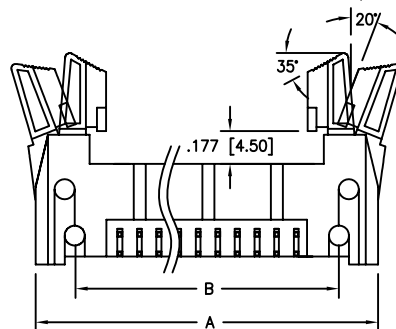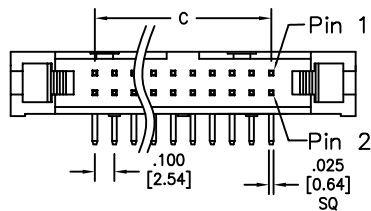

10, 14, 16 PIN



Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64

A = .100 [2.54] x No. of Spaces + .860 [21.84]

B = .100 [2.54] x No. of Spaces + .460 [11.68]

C = .100 [2.54] x No. of Spaces

D = .100 [2.54] x No. of Spaces + .307 [7.80]

SPECIFICATIONS:

Material:

Insulator: PBT, glass fiber, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold over Nickel underplate overall

Electrical:

Current rating: 1 Amp

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: LATCHED BOX HEADER, RIGHT ANGLE,
SHORT EJECTOR LATCHES

APPROVALS		DATE
DRAWN	AY	11/11/11
CHECKED	AH	11/11/11
APPROVED		

SIZE X	PART NO. MHR-XX-HUAS	REV.P A
REF: S00059T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1