

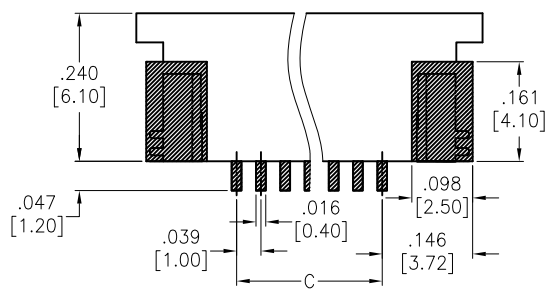

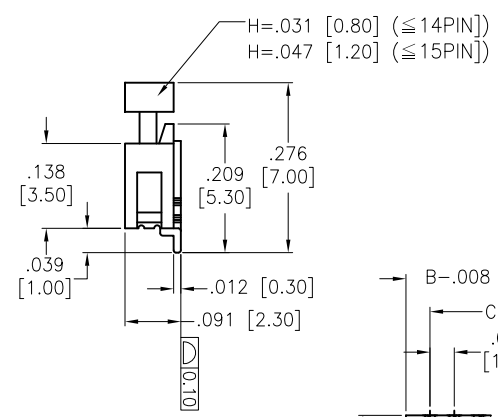
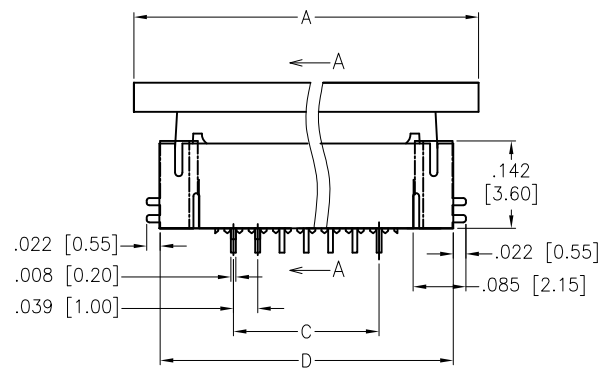
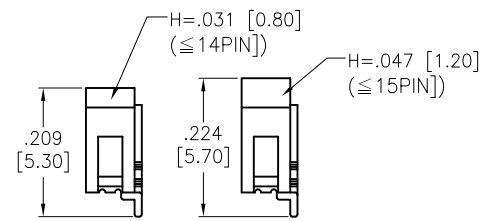


6	5	4	3	2	1		
APPROVED: _____			Rev	AWO #	Description	Date	Appr
DATE: _____ TITLE: _____			-		RELEASED	6/22/15	

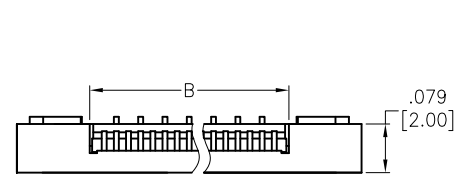

FPC/FFC T=.012±.001 [0.30±0.03]

SPECIFICATIONS:
 Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Actuator: Hi-temp thermoplastic, rated UL 94V-0, Color: Black
Contacts: Phosphor Bronze
Hold Down: Brass, Tin plated
 Plating:
Tin over Copper underplate overall
 Electrical:
Current rating: 0.5 A max
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
Operating temperature: -25°C to +85°C
 Environmental:
Lead free, RoHS compliant.



Positions: 03 thru 61
 A = .039 [1.00] x No. of Space + .323 [8.20]
 B = .039 [1.00] x No. of Space + .087 [2.20]
 C = .039 [1.00] x No. of Space
 D = .039 [1.00] x No. of Space + .240 [6.10]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	∅X ± .10	
.XX ± .020	∅XX ± .015	
.XXX ± .015	∅XXX ± .010	
APPROVALS		DATE
DRAWN	HR	6/22/15
CHECKED	AY1	6/22/15
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE
SIDE ENTRY, LOWER CONTACT**

SIZE X	PART NO. PCA-2FA-XX-HL-3	REV. -
REF: S00165C	SCALE: NTS	SHEET 1 OF 1