


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 14559, EM	09/15/08	BS
B	UPDATE PACKING, RFS. 17080, EM	09/24/09	BS

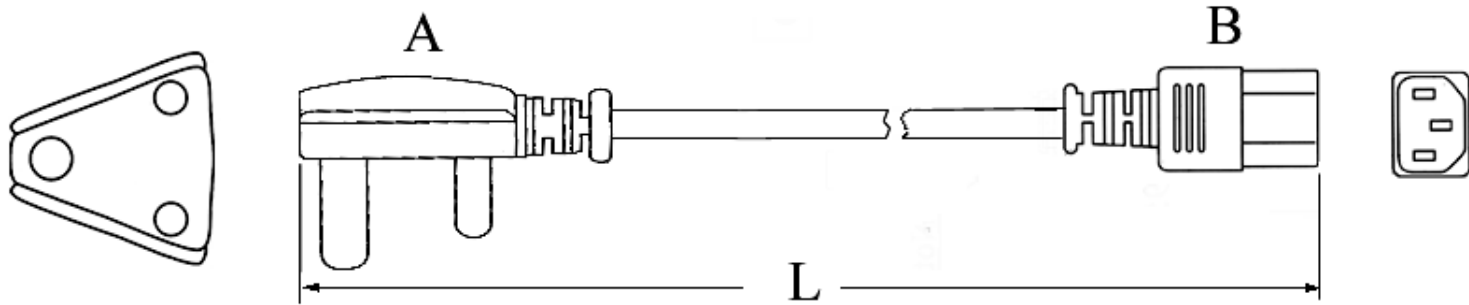

**GENERAL SPECIFICATIONS:**

RATING: 10A / 250V AC  
 CABLE TYPE / SIZE: H05VV-F, 3x1 mm<sup>2</sup>  
 TEMPERATURE RATING: 70° C  
 CONDUCTOR COLORS: BLUE / BROWN / GREEN-YELLOW  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2500 ± 20 mm  
 CABLE OUTER DIAMETER: 7.0 ± 0.1 mm  
 END 'A' TERMINATION: SOUTH AFRICAN TYPE PLUG (16A), 2 POLE + GROUND  
 RIGHT ANGLE STYLE  
 END 'B' TERMINATION: IEC 320 / C13 FEMALE  
 APPROVALS PLUG: SABS  
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEPEC, OVE, SAA, IMMEQ  
 APPROVALS CONNECTOR: SABS, VDE, N, S, D, FI, KEMA, UTE, CEPEC, OVE, IMQ, ASEV, SAA, USE, BSI, UL, CE


**PACKING:**

BULK PACKED, BUNDLES OF 25.  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

**NOTES:**

1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBERS.



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 <b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		<b>MILLIMETERS ANGULAR</b> .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: EM	DATE: 09/15/08	DWG TITLE: SOUTH AFRICAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 09/15/08	FSCN No.: G, CC	SIZE A	MODEL: N / A
APRVD: HM	DATE: 09/15/08	SCALE: NONE	PART NO: <b>2084272M5701(R)</b>	
				REV. B
				SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice