


# C317C102M1U5HA

GoldMax 300 Comm Z5U, Ceramic, 1000 pF, 20%, 100 VDC, Z5U, GoldMax, Commercial Standard, Lead Spacing = 5.08mm

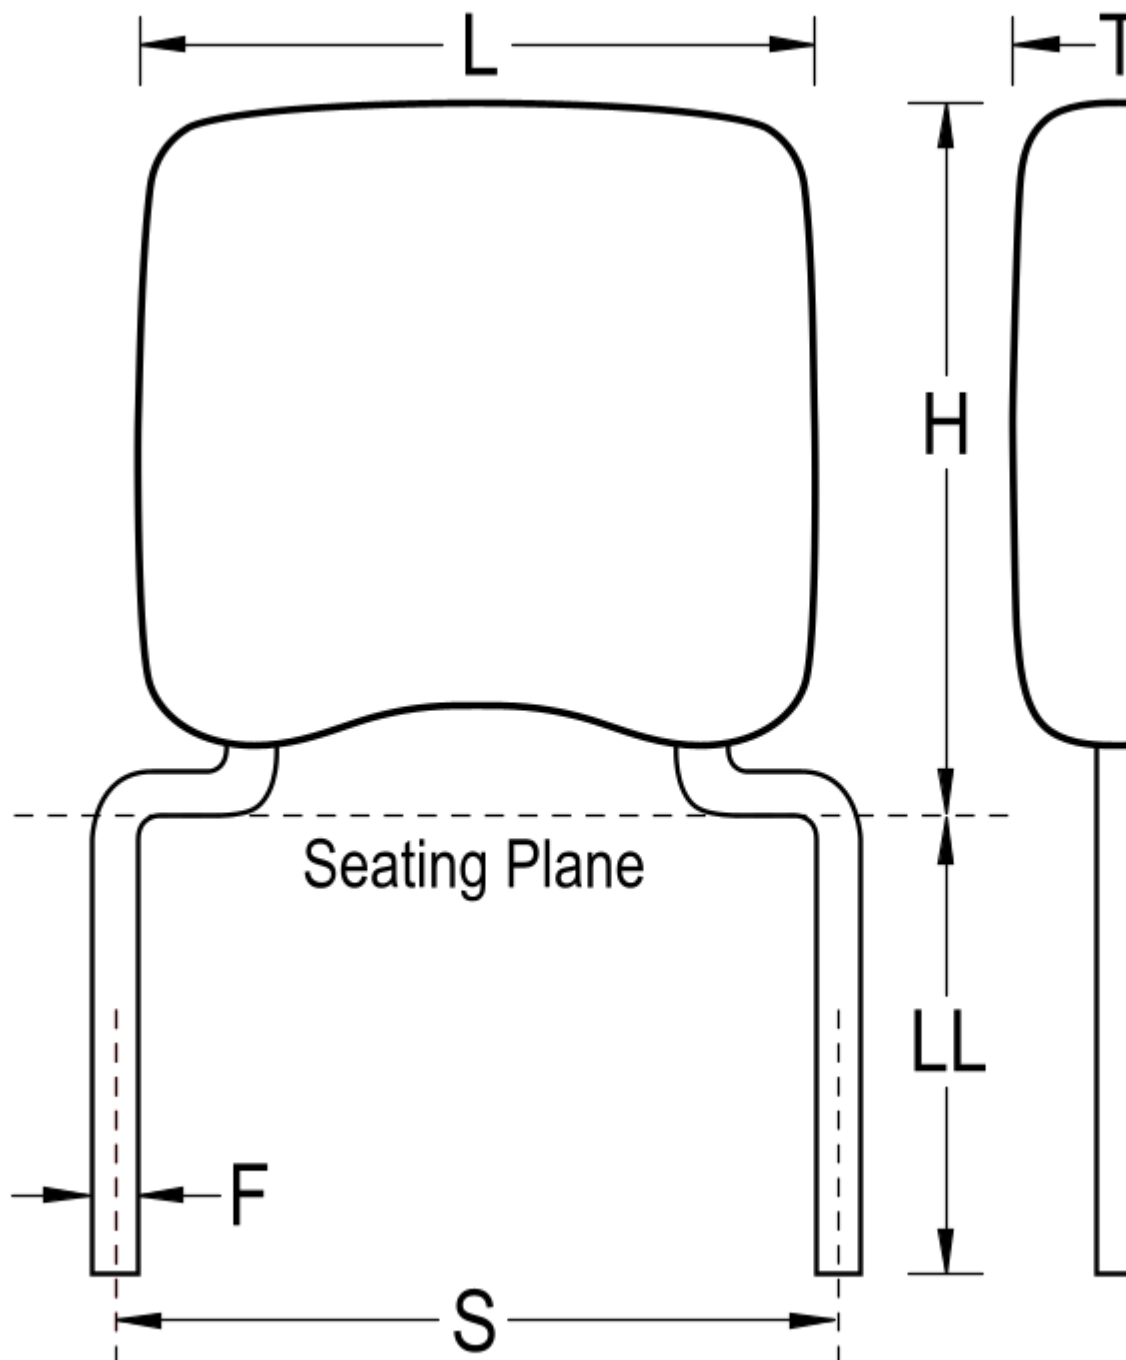

Click [here](#) for the 3D model.

## Dimensions

L 3.81mm MAX

H 5.08mm MAX

T 2.54mm MAX

S 5.08mm +/-0.78mm

## Dimensions

LL 7mm MIN

F 0.51mm +0.1/-0.025mm

## Packaging Specifications

Packaging Bulk, Bag

Packaging Quantity 500

## General Information

Series GoldMax 300 Comm Z5U

Style Radial

Description GoldMax, Commercial Standard

RoHS No

Prop 65 **WARNING:** Cancer and reproductive harm -  
<http://www.p65warnings.ca.gov>.

SCIP Number d4c83dcf-0af3-4f6a-8c42-c840cabd6f5b

Termination Lead (SnPb)

Failure Rate N/A

AEC-Q200 No

Halogen Free Yes

## Specifications

Capacitance	1000 pF
Measurement Condition	1 kHz 1.0Vrms
Capacitance Tolerance	20%
Voltage DC	100 VDC
Dielectric Withstanding Voltage	250 VDC
Temperature Range	+10/+85°C
Temperature Coefficient	Z5U
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	+22%/-56%, 1kHz 1.0Vrms
Dissipation Factor	4% 1 kHz 1.0Vrms
Aging Rate	7% Loss/Decade Hour
Insulation Resistance	10 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 37876b2a-9f6f-446b-b7c4-184c42dc90c2

© 2006 - 2023 KEMET

Generated 5/18/2023 - 37876b2a-9f6f-446b-b7c4-184c42dc90c2

© 2006 - 2023 KEMET