

KombiSIGN 40 / DesignLOOK  
**TwinFLASH Design 24VDC YE**



<b>Part No.:</b>	<b>634.340.55</b>
<b>Series:</b>	<b>KombiSIGN 40</b>



MECHANICAL DATA	
Height	59 mm
Diameter	40 mm
Materials	PC
Dome colour	Clear
Protection category	IP66 IP69K
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	40 g
Product weight	29 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	65 mA
Rated inrush current	900 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

OPTICAL DATA	
Light source	LED
Light colour	Yellow
Optical signal image	EVS Flash TwinFlash
Flash frequency	1 Hz
Service life optical	50,000 h maximum

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK  
**TwinFLASH Design 24VDC YE**

EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	1323

**DRAWING**

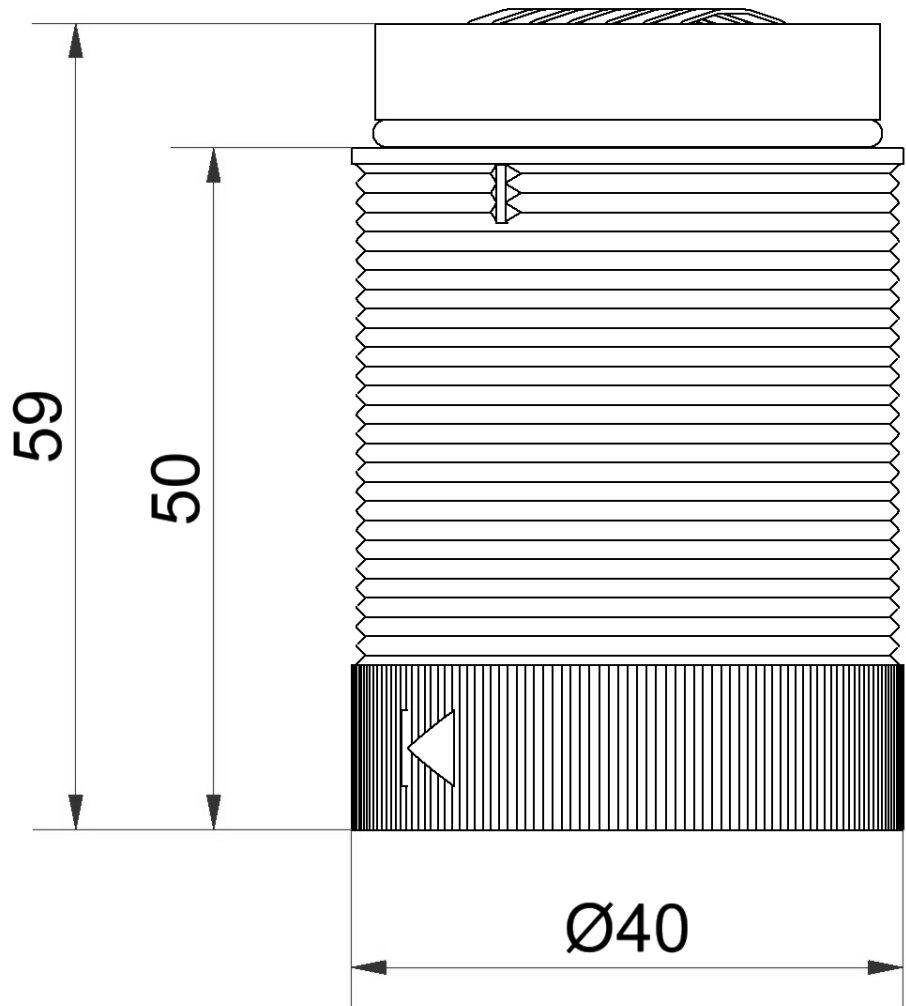

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.