


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.
CONTACT: ANACONDA 7021 OR BOILCAT C97.
GOLD PLATED.
SOCKET: BRASS, TIN PLATED.

2. PERFORMANCE:
MAXIMUM CURRENT: 15 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

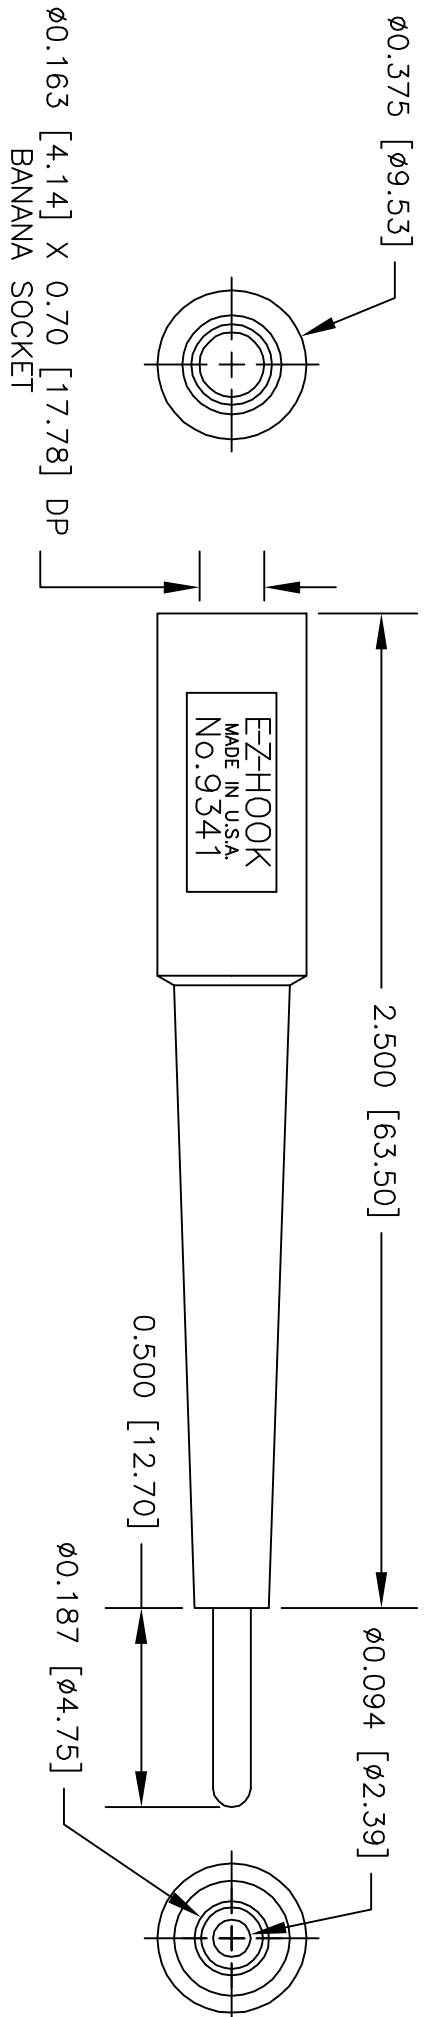

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES

± .XX ± .XXX ±

CONTRACT NO. APPROVALS DATE

MATERIAL SEE NOTE.

FINISH SEE NOTE.

DESCRIPTION: EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

APPLICATION USED ON

DO NOT SCALE DRAWING

SIZE CODE IDENT NO. DRAWING NO. A 08505 9341

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.