



.XX ±0.13 .XXX ±0.05

ISSUE NUMBER
ORIGINAL

(1)

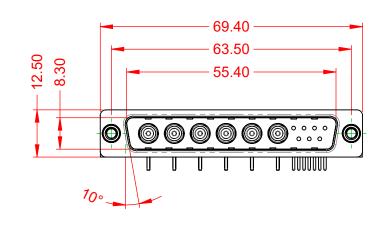




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

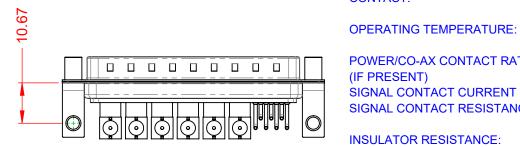


POWER/CO-AX CONTACT RATING:	75Ω (IMPEDA
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE: ANCE)

-55°C ~ 125°C

TACT

1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY					
				DRAWN: C.B		DATE: JAN. 01/201		19	
				CHECKED:		DATE:			
		EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE: (IN C.A.D. 1	:1)	SHEET 1	OF	2	
				DRAWING NUMBER: 629-13W62		3240-7N6		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER:	629-13W	6240-7N6		1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

