

Jumper - BRIDGE- 6-3M - 2901697

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




3-phase loop bridge for 6 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m, with ferrules included.

Your advantages

- Only suitable for CONTACTRON series with screw connection ELR H3...-SC-..., ELR H5...-SC-..., EMM...IFS
- Bridging of 2 to 10 devices with maximum module spacing of 22.5 mm
- Considerable reduction in wiring
- Up to 575 V AC/3 x 25 A



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 624626 |
| GTIN | 4046356624626 |

Technical data

Dimensions

| | |
|--------------------------------|---------|
| Width | 22.5 mm |
| Length of the connecting cable | 3 m |

General

| | |
|------------------------------|----------------------|
| Operating voltage range | 42 V AC ... 575 V AC |
| Operating current | ≤ 25 A |
| Number of bridgeable modules | 6 |
| Connecting cable length | 3 m |
| Color | gray |
| Conductor cross section | 2.5 mm ² |

Environmental Product Compliance

| | |
|------------|--|
| China RoHS | Environmentally Friendly Use Period = 50 |
|------------|--|

Jumper - BRIDGE- 6-3M - 2901697

Technical data

Environmental Product Compliance

| | |
|--|---|
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|---|

Drawings

Application drawing

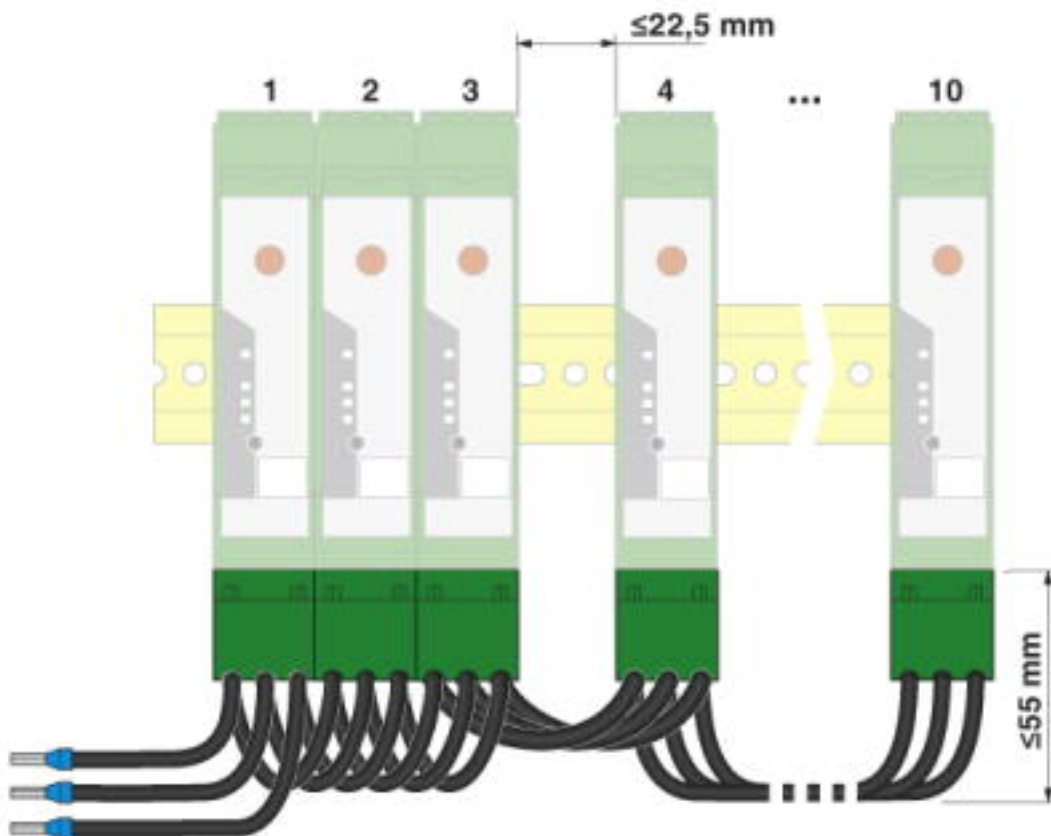


Figure shows the version BRIDGE- 4

Approvals

Approvals

Approvals






EAC / UL Listed / cUL Listed / UL Listed / cUL Listed

Ex Approvals

Jumper - BRIDGE- 6-3M - 2901697

Approvals

Approval details

| | | | |
|------------|---|---|--------------------------|
| EAC |  | | RU C- DE.A*30.B.01742 |
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 228652 |
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 228652 |
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>