


## 30HV24N561JN

Aliases (30HV24N561J)

HV RAD-LDD Indust COG HV, Ceramic, 560 pF, 5%, 3000 VDC, COG, Commercial, High Voltage, Lead Spacing = 12.07mm

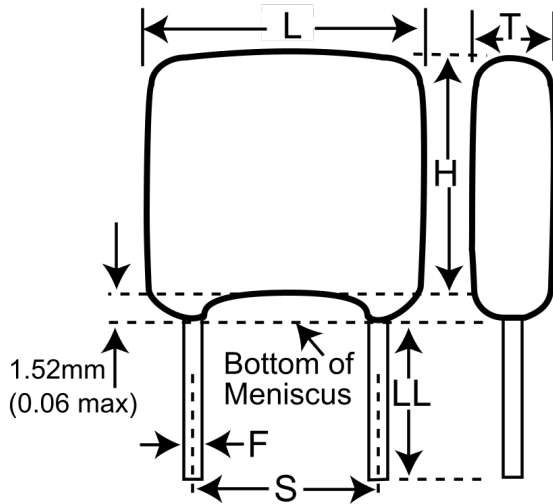

Click [here](#) for the 3D model.

### Dimensions

L	14.48mm MAX
H	12.7mm MAX
T	6.89mm MAX
S	12.07mm +/-0.762mm
LL	3.175mm MIN
F	0.635mm +0.102/-0.051mm

### Packaging Specifications

Packaging	Waffle
Packaging Quantity	20

### General Information

Series	HV RAD-LDD Indust COG HV
Style	Radial
Description	Commercial, High Voltage
Features	Commercial
RoHS	With Exemptions
REACH	SVHC (Pb - CAS 7439-92-1)
SCIP Number	ef26097b-3862-4ee0-b0ad-404a563ece0f
Termination	Nickel
Failure Rate	N/A
AEC-Q200	No

### Specifications

Capacitance	560 pF
Capacitance Tolerance	5%
Voltage DC	3000 VDC
Dielectric Withstanding Voltage	3600 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	COG
Dissipation Factor	0.15%
Aging Rate	0% Loss/Decade Hour
Insulation Resistance	100 GOhms