
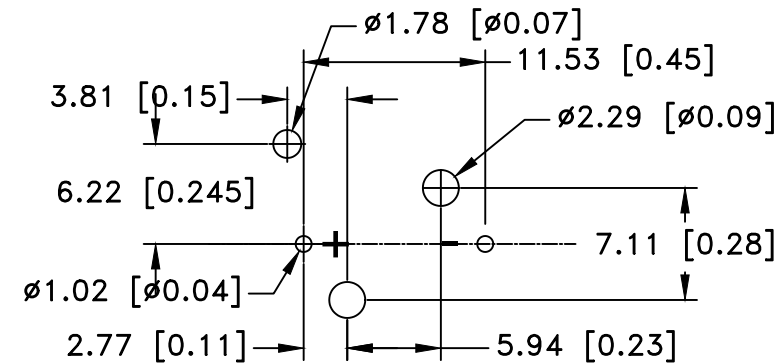



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/17/17	D	UPDATED SPECIFICATION	T.B.	B.S.	
04/12/19	E	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

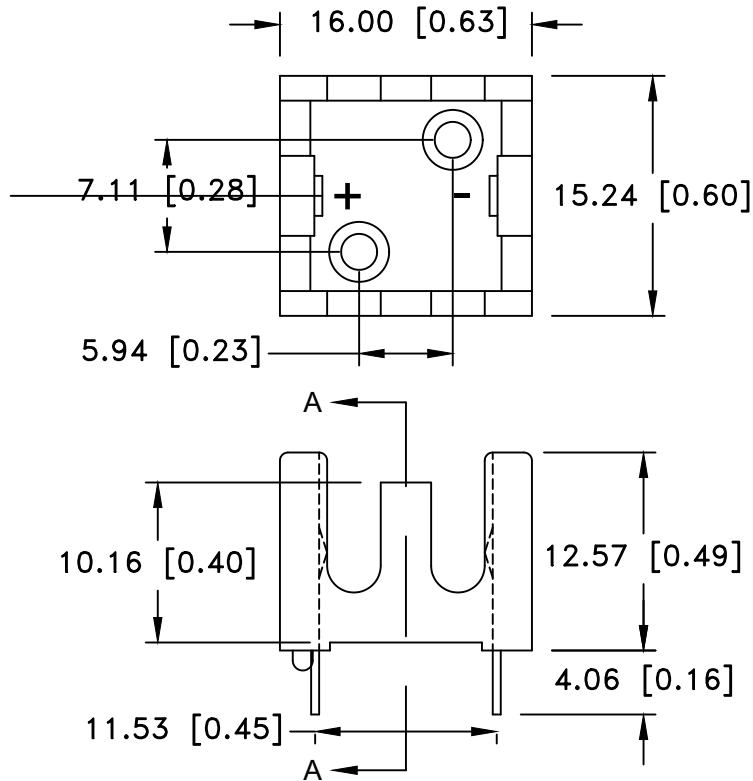

PCB LAYOUT

SPECIFICATIONS:

HOLDER MATERIAL: SELF EXTINGUISHING THERMOPLASTIC,
BLACK PBT

FLAMMABILITY RATING:UL94V-0, FILE #E41797

PC PINS: PHOS. BRONZE, NICKEL PLATED

DIELECTRIC STRENGTH: 560 VOLTS/MIL AT 25°C FOR 5 SEC.

TEMPERATURE RANGE: -55°C TO +140°C

RESISTANCE TO SOLVENTS: XYLENE, ETHYL , BUTYL, METHYL,
PROPYL ALCOHOL, ETHYL ACETATE,
HEPTANE, TOLUENE, REFRIGERANT

NOTES:


EYELET STIMPSON STYLE#A1883 0.110" OD x 0.190" FLANGE

FLANGE RECESS $\phi 0.203$ " x 0.090" DEEP

ACCEPTS STANDARD 2-56 MACHINE SCREWS

ACCESSORIES: BI-UM-3-4, INSULATOR

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.
$\pm .5 (.020)$			Approved By T.B.
Fractional	Title		
$\pm .8 (.030)$	BH1/3N-C LITHIUM BATTERY HOLDER		
Angular	Date	Drawing Number	
$\pm 3^\circ$	04/12/19	BH1/3N-C	