

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

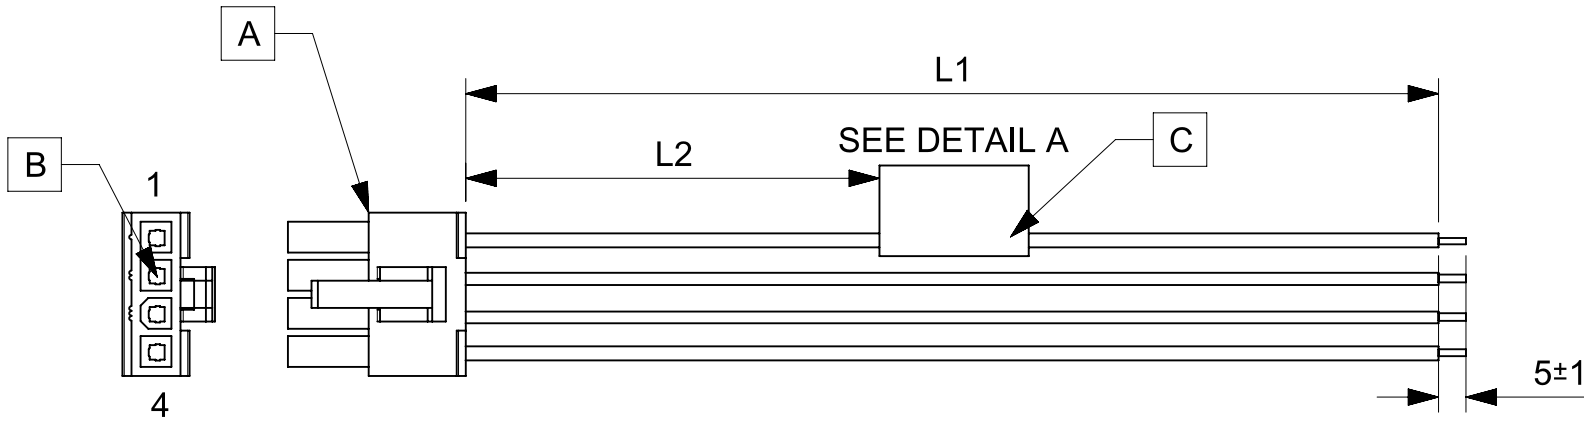


TABLE			
PART NUMBER	L1	L2	TITLE
2153211041	150±8	63 REF	MINIFIT JR SR R-S 4 CIRCUIT 150MM Sn
2153211042	300±10	138 REF	MINIFIT JR SR R-S 4 CIRCUIT 300MM Sn
2153211043	600±10	288 REF	MINIFIT JR SR R-S 4 CIRCUIT 600MM Sn

**NOTES**

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	mm	NTS	ANGULAR TOL ± °			
	4 PLACES ±		3 PLACES ±			
3 PLACES ±		2 PLACES ±		EC NO: 638380	2020/04/06	
2 PLACES ±		1 PLACE ±		DRWN: AS20		2020/05/28
0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D: RDESAI01	2020/05/28	
THIRD ANGLE PROJECTION		DRAWING	SERIES	INITIAL REVISION:	DRWN: AS20	2020/04/06
A4-SIZE		215321	MATERIAL NUMBER	DRWN: AS20	2020/05/28	2153211041
SEE TABLE		CUSTOMER	SHEET NUMBER	APPR: RDESAI01	GENERAL MARKET	1 OF 1