


CKT	DIM. A	DIM. B	SLOT LOC BETWEEN CKTS
2	7.77 .306	3.96 ± 0.05 .156 ± 0.002	NONE
3	11.73 .462	7.92 ± 0.08 .312 ± 0.003	NONE
4	15.70 .618	11.89 ± 0.08 .468 ± 0.003	NONE
5	19.66 .774	15.85 ± 0.10 .624 ± 0.004	NONE
6	23.62 .930	19.81 ± 0.10 .780 ± 0.004	3 & 4
7	27.58 1.086	23.77 ± 0.10 .936 ± 0.004	4 & 5
8	31.55 1.242	27.74 ± 0.13 1.092 ± 0.005	4 & 5
9	35.51 1.398	31.70 ± 0.13 1.248 ± 0.005	5 & 6
10	39.47 1.554	35.66 ± 0.13 1.404 ± 0.005	5 & 6
11	43.43 1.710	39.62 ± 0.15 1.560 ± 0.006	6 & 7
12	47.40 1.866	43.59 ± 0.15 1.716 ± 0.006	4 & 5 8 & 9
13	51.36 2.022	47.55 ± 0.15 1.872 ± 0.006	4 & 5 9 & 10
14	55.32 2.178	51.51 ± 0.18 2.028 ± 0.007	5 & 6 9 & 10
15	59.28 2.334	55.47 ± 0.18 2.184 ± 0.007	5 & 6 10 & 11
16	63.25 2.490	59.44 ± 0.18 2.340 ± 0.007	5 & 6 11 & 12
17	67.21 2.646	63.40 ± 0.20 2.496 ± 0.008	6 & 7 11 & 12
18	71.17 2.802	67.36 ± 0.20 2.652 ± 0.008	6 & 7 12 & 13

CENTERLINE OF PIN AT TIP
NOT TO VARY FROM CENTERLINE OF
PIN AT DATUM -D- BY MORE THAN
0.20 / .008 IN ANY DIRECTION.

- NOTES:
- MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
 - FINISH: (197) OVERALL REFLOWED MATTE TIN: 0.00152/.000060 MIN. OVER 0.00127/.000050 MIN. NICKEL OVERALL.
(154) OVERALL TIN: .00254/.000100 MIN OVER .00127/.000050 MIN NICKEL.
(208) SELECT GOLD: .00038/.000015 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.
(228) SELECT GOLD: .00076/.000030 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.
(241) SELECT GOLD: 0.00051/.000020 MIN. SELECT TIN: 0.00254/.000100 MIN. OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
FOR ADDITIONAL PLATING INFO, SEE SDES-88.
 - PRODUCT SPECIFICATION AND PROCESS PARAMETERS: SEE PS-08-50.
 - PACKAGING INFORMATION: SEE CHART
 - SOLDERABILITY: PER SMES-152.
 - PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION)
 - PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - SLOTS ON BACKWALL ARE BETWEEN CIRCUITS. SEE CHART FOR LOCATION.
 - CIRCUIT 1 DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT 1 MAY OR MAY NOT LINE UP WITH CIRCUIT 1 ON THE MATING HOUSING.
 - FEATURE MAY BE ON EITHER SIDE OF THE PART

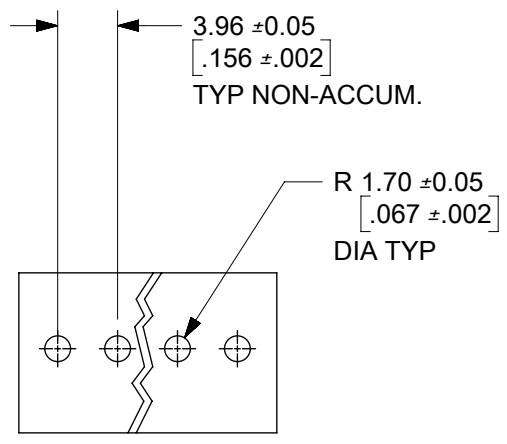


PCB LAYOUT: COMPONENT SIDE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS MM/IN	SCALE 2:1	CURRENT REV DESC: OBSOLETE PART NUMBER	
GENERAL TOLERANCES (UNLESS SPECIFIED)		<p>EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p>INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p>	
4 PLACES \pm	\pm		
3 PLACES \pm	± 0.01		
2 PLACES \pm	$\pm 0.25 \pm 0.015$		
1 PLACE \pm	$\pm 0.38 \pm$	<p>DOCUMENT NUMBER: SDA-41792</p> <p>DOC TYPE: PSD DOC PART: 000 REVISION: L1</p>	
0 PLACES \pm	\pm	<p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p> <p>THIRD ANGLE PROJECTION</p> <p>DRAWING: B-SIZE SERIES: 41792</p> <p>MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 8</p>	

	10	9	8	7	6	5	4	3	2	1	
									41792		
F											F
E											E
D											D
C											C
B											B
A											A

OPTIONS	Group	A-41792-0002/0018	Group	A-41792-0511/0527	Group	A-41792-0528/0544	Group	A-41792-0562/0578
	Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018
	Pin No:	43294-0572	Pin No:	43294-0569	Pin No:	43294-0570	Pin No:	43294-0570
	Plating:	197 - TIN	Plating:	208 - 15 GOLD	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD
	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100
	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450
	Gold Loc G	N/A	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270
	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213
	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156
	Tin Loc T	OVERALL	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200
	Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	2
	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number
2	26-60-5020	A-41792-0002	41792-0511	A-41792-0511	41792-0528	A-41792-0528	41792-0562	A-41792-0562
3	26-60-5030	A-41792-0003	41792-0512	A-41792-0512	41792-0529	A-41792-0529	41792-0563	A-41792-0563
4	26-60-5040	A-41792-0004	41792-0513	A-41792-0513	41792-0530	A-41792-0530	41792-0564	A-41792-0564
5	26-60-5050	A-41792-0005	41792-0514	A-41792-0514	41792-0531	A-41792-0531	41792-0565	A-41792-0565
6	26-60-5060	A-41792-0006	41792-0515	A-41792-0515	41792-0532	A-41792-0532	41792-0566	A-41792-0566
7	26-60-5070	A-41792-0007	41792-0516	A-41792-0516	41792-0533	A-41792-0533	41792-0567	A-41792-0567
8	26-60-5080	A-41792-0008	41792-0517	A-41792-0517	41792-0534	A-41792-0534	41792-0568	A-41792-0568
9	26-60-5090	A-41792-0009	41792-0518	A-41792-0518	41792-0535	A-41792-0535	41792-0569	A-41792-0569
10	26-60-5100	A-41792-0010	41792-0519	A-41792-0519	41792-0536	A-41792-0536	41792-0570	A-41792-0570
11	26-60-5110	A-41792-0011	41792-0520	A-41792-0520	41792-0537	A-41792-0537	41792-0571	A-41792-0571
12	26-60-5120	A-41792-0012	41792-0521	A-41792-0521	41792-0538	A-41792-0538	41792-0572	A-41792-0572
13	26-60-5130	A-41792-0013	41792-0522	A-41792-0522	41792-0539	A-41792-0539	41792-0573	A-41792-0573
14	26-60-5140	A-41792-0014	41792-0523	A-41792-0523	41792-0540	A-41792-0540	41792-0574	A-41792-0574
15	26-60-5150	A-41792-0015	41792-0524	A-41792-0524	41792-0541	A-41792-0541	41792-0575	A-41792-0575
16	26-60-5160	A-41792-0016	41792-0525	A-41792-0525	41792-0542	A-41792-0542	41792-0576	A-41792-0576
17	26-60-5170	A-41792-0017	41792-0526	A-41792-0526	41792-0543	A-41792-0543	41792-0577	A-41792-0577
18	26-60-5180	A-41792-0018	41792-0527	A-41792-0527	41792-0544	A-41792-0544	41792-0578	A-41792-0578

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	±	0.25	± 0.015						
1 PLACE	±	0.38	±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				EC NO: 650267		2020/10/27		2020/12/10	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
				B-SIZE		41792		MATERIAL NUMBER	
								CUSTOMER	
								SEE TABLE	
								GENERAL MARKET	
								SHEET NUMBER	
								2 OF 8	

DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35
-----------------	----	--------------	------------	----------



10	9	8	7	6	5	4	3	2	1																																																																																																																																												
									41792																																																																																																																																												
E	OPTIONS	Group	A-41792-0019/0035	Group	A-41792-0036/0050	Group	A-41792-0051/0067	Group																																																																																																																																													
		Header No:	41790-0002/0018	Header No:	41790-0004/0018	Header No:	41790-0002/0018	Header No:																																																																																																																																													
		Pin No:	43294-0573	Pin No:	43294-0572	Pin No:	43294-0643	Pin No:																																																																																																																																													
		Plating:	241 - GOLD	Plating:	197 - TIN	Plating:	197 - TIN	Plating:																																																																																																																																													
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	29.97 / 1.180	Pin Length L																																																																																																																																													
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	13.41 / .528	Mating M																																																																																																																																													
		Gold Loc G	6.86/ .270	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G																																																																																																																																													
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y																																																																																																																																													
		PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	4.01 / .158	PC Tail P																																																																																																																																													
		Tin Loc T	5.08/ .200	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T																																																																																																																																													
		Voided Ckts	NONE	Voided Ckts	4	Voided Ckts	NONE	Voided Ckts																																																																																																																																													
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per																																																																																																																																													
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																																																																													
2	26-61-5020	A-41792-0019																																																																																																																																																			
3	26-61-5030	A-41792-0020																																																																																																																																																			
4	26-61-5040	A-41792-0021	26-61-5043	A-41792-0036																																																																																																																																																	
5	26-61-5050	A-41792-0022	26-61-5053	A-41792-0037																																																																																																																																																	
6	26-61-5060	A-41792-0023	26-61-5063	A-41792-0038																																																																																																																																																	
7	26-61-5070	A-41792-0024	26-61-5073	A-41792-0039																																																																																																																																																	
8	26-61-5080	A-41792-0025	26-61-5083	A-41792-0040																																																																																																																																																	
9	26-61-5090	A-41792-0026	26-61-5093	A-41792-0041																																																																																																																																																	
10	26-61-5100	A-41792-0027	26-61-5103	A-41792-0042																																																																																																																																																	
11	26-61-5110	A-41792-0028	26-61-5113	A-41792-0043																																																																																																																																																	
12	26-61-5120	A-41792-0029	26-61-5123	A-41792-0044																																																																																																																																																	
13	26-61-5130	A-41792-0030	26-61-5133	A-41792-0045																																																																																																																																																	
14	26-61-5140	A-41792-0031	26-61-5143	A-41792-0046																																																																																																																																																	
15	26-61-5150	A-41792-0032	26-61-5153	A-41792-0047																																																																																																																																																	
16	26-61-5160	A-41792-0033	26-61-5163	A-41792-0048																																																																																																																																																	
17	26-61-5170	A-41792-0034	26-61-5173	A-41792-0049																																																																																																																																																	
18	26-61-5180	A-41792-0035	26-61-5183	A-41792-0050																																																																																																																																																	
<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> <td colspan="2" rowspan="2">  </td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6"></td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> <td colspan="2"></td> <td colspan="2">EC NO: 650267</td> <td colspan="2">2020/10/27</td> <td colspan="2">KK .156 HEADER ASSEMBLY</td> </tr> <tr> <td colspan="2"></td> <td>MM</td> <td>INCH</td> <td colspan="2"></td> <td colspan="2">DRWN: SKANDB</td> <td colspan="2">2020/12/10</td> <td colspan="2">FRICITION LOCK RIGHT ANGLE W/O PEGS</td> </tr> <tr> <td colspan="2">4 PLACES ±</td> <td></td> <td></td> <td colspan="2"></td> <td colspan="2">CHK'D: GGA</td> <td colspan="2">2020/12/10</td> <td colspan="2">PRODUCT CUSTOMER DRAWING</td> </tr> <tr> <td colspan="2">3 PLACES ±</td> <td></td> <td>0.01</td> <td colspan="2"></td> <td colspan="2">APPR: GGA</td> <td colspan="2">2020/12/10</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">2 PLACES ±</td> <td>0.25</td> <td>0.015</td> <td colspan="2"></td> <td colspan="2">INITIAL REVISION:</td> <td colspan="2"></td> <td colspan="2">DOCUMENT NUMBER</td> </tr> <tr> <td colspan="2">1 PLACE ±</td> <td>0.38</td> <td></td> <td colspan="2"></td> <td colspan="2">DRWN: JSCHAFFER</td> <td colspan="2">11-07-03</td> <td colspan="2">SDA-41792</td> </tr> <tr> <td colspan="2">0 PLACES ±</td> <td></td> <td></td> <td colspan="2"></td> <td colspan="2">APPR: MARGULIS</td> <td colspan="2">11-17-03</td> <td colspan="2">PSD 000 L1</td> </tr> <tr> <td colspan="2">ANGULAR TOL ±</td> <td colspan="2">0.5°</td> <td colspan="2"></td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING</td> <td colspan="2">SHEET NUMBER</td> </tr> <tr> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">3 OF 8</td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER								MM/IN		1:1								GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267		2020/10/27		KK .156 HEADER ASSEMBLY				MM	INCH			DRWN: SKANDB		2020/12/10		FRICITION LOCK RIGHT ANGLE W/O PEGS		4 PLACES ±						CHK'D: GGA		2020/12/10		PRODUCT CUSTOMER DRAWING		3 PLACES ±			0.01			APPR: GGA		2020/12/10				2 PLACES ±		0.25	0.015			INITIAL REVISION:				DOCUMENT NUMBER		1 PLACE ±		0.38				DRWN: JSCHAFFER		11-07-03		SDA-41792		0 PLACES ±						APPR: MARGULIS		11-17-03		PSD 000 L1		ANGULAR TOL ±		0.5°				THIRD ANGLE PROJECTION		DRAWING		SHEET NUMBER		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE		41792		3 OF 8	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																																					
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																																																																	
MM/IN		1:1																																																																																																																																																			
GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267		2020/10/27		KK .156 HEADER ASSEMBLY																																																																																																																																											
		MM	INCH			DRWN: SKANDB		2020/12/10		FRICITION LOCK RIGHT ANGLE W/O PEGS																																																																																																																																											
4 PLACES ±						CHK'D: GGA		2020/12/10		PRODUCT CUSTOMER DRAWING																																																																																																																																											
3 PLACES ±			0.01			APPR: GGA		2020/12/10																																																																																																																																													
2 PLACES ±		0.25	0.015			INITIAL REVISION:				DOCUMENT NUMBER																																																																																																																																											
1 PLACE ±		0.38				DRWN: JSCHAFFER		11-07-03		SDA-41792																																																																																																																																											
0 PLACES ±						APPR: MARGULIS		11-17-03		PSD 000 L1																																																																																																																																											
ANGULAR TOL ±		0.5°				THIRD ANGLE PROJECTION		DRAWING		SHEET NUMBER																																																																																																																																											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE		41792		3 OF 8																																																																																																																																											
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35																																																																																																																																																

10	9	8	7	6	5	4	3	2	1																																																																																																		
		41792																																																																																																									
E	OPTIONS	Group	A-41792-0198/0213	Group	A-41792-0214/0227	Group	A-41792-0242/0257	Group	A-41792-0341/0352																																																																																																		
		Header No:	41790-0002/0018	Header No:	41790-0005/0018	Header No:	41790-0003/0018	Header No:	41790-0007/0018																																																																																																		
		Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572																																																																																																		
		Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN																																																																																																		
		Pin Length L	27.94/ 1.100	Pin Length L	27.94/ 1.100	Pin Length L	27.94/ 1.100	Pin Length L	27.94/ 1.100																																																																																																		
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																																		
		Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A																																																																																																		
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																																		
		PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156																																																																																																		
		Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL																																																																																																		
		Voided Ckts	2	Voided Ckts	5	Voided Ckts	3	Voided Ckts	7																																																																																																		
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																																		
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																																			
2																																																																																																											
3	26-62-5031	A-41792-0198			26-62-5035	A-41792-0242																																																																																																					
4	26-62-5041	A-41792-0199			26-62-5045	A-41792-0243																																																																																																					
5	26-62-5051	A-41792-0200	41792-0214	A-41792-0214	26-62-5055	A-41792-0244																																																																																																					
6	26-62-5061	A-41792-0201	26-62-5060	A-41792-0215	26-62-5065	A-41792-0245																																																																																																					
7	26-62-5071	A-41792-0202	41792-0216	A-41792-0216	26-62-5075	A-41792-0246	41792-0341	A-41792-0341																																																																																																			
8	26-62-5081	A-41792-0203	41792-0217	A-41792-0217	26-62-5085	A-41792-0247	41792-0342	A-41792-0342																																																																																																			
9	26-62-5091	A-41792-0204	41792-0218	A-41792-0218	26-62-5095	A-41792-0248	41792-0343	A-41792-0343																																																																																																			
10	26-62-5101	A-41792-0205	26-62-5100	A-41792-0219	26-62-5105	A-41792-0249	26-62-5104	A-41792-0344																																																																																																			
11	26-62-5111	A-41792-0206	41792-0220	A-41792-0220	26-62-5115	A-41792-0250	26-62-5114	A-41792-0345																																																																																																			
12	26-62-5121	A-41792-0207	41792-0221	A-41792-0221	26-62-5125	A-41792-0251	41792-0346	A-41792-0346																																																																																																			
13			41792-0222	A-41792-0222	26-62-5135	A-41792-0252	41792-0347	A-41792-0347																																																																																																			
14	26-62-5141	A-41792-0209	41792-0223	A-41792-0223	26-62-5145	A-41792-0253	41792-0348	A-41792-0348																																																																																																			
15	26-62-5151	A-41792-0210	41792-0224	A-41792-0224	26-62-5155	A-41792-0254	41792-0349	A-41792-0349																																																																																																			
16	26-62-5161	A-41792-0211	41792-0225	A-41792-0225	26-62-5165	A-41792-0255	41792-0350	A-41792-0350																																																																																																			
17	26-62-5171	A-41792-0212	41792-0226	A-41792-0226	26-62-5175	A-41792-0256	41792-0351	A-41792-0351																																																																																																			
18	26-62-5181	A-41792-0213	41792-0227	A-41792-0227	26-62-5185	A-41792-0257	41792-0352	A-41792-0352																																																																																																			
		<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6" rowspan="5">  KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> <td>± 0.01</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>0.25</td> <td>± 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>0.38</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2"> EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA </td> <td colspan="2"> 2020/10/27 2020/12/10 2020/12/10 </td> <td colspan="2"> PRODUCT CUSTOMER DRAWING </td> </tr> <tr> <td colspan="4">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2"> THIRD ANGLE PROJECTION  </td> <td colspan="2"> DRAWING SERIES B-SIZE 41792 </td> <td colspan="2"> DOCUMENT NUMBER SDA-41792 </td> </tr> <tr> <td colspan="4"></td> <td colspan="2"> MATERIAL NUMBER SEE TABLE </td> <td colspan="2"> CUSTOMER GENERAL MARKET </td> <td colspan="2"> REVISION PSD 000 L1 </td> </tr> <tr> <td colspan="4"></td> <td colspan="2"> SHEET NUMBER 4 OF 8 </td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER						MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS						GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±		±	3 PLACES	±		± 0.01	2 PLACES	±	0.25	± 0.015	1 PLACE	±	0.38	±	0 PLACES	±		±	ANGULAR TOL ± 0.5°				EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA		2020/10/27 2020/12/10 2020/12/10		PRODUCT CUSTOMER DRAWING		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING SERIES B-SIZE 41792		DOCUMENT NUMBER SDA-41792						MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		REVISION PSD 000 L1						SHEET NUMBER 4 OF 8					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																											
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																							
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS																																																																																																							
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																											
	MM	INCH																																																																																																									
4 PLACES	±		±																																																																																																								
3 PLACES	±		± 0.01																																																																																																								
2 PLACES	±	0.25	± 0.015																																																																																																								
1 PLACE	±	0.38	±																																																																																																								
0 PLACES	±		±																																																																																																								
ANGULAR TOL ± 0.5°				EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA		2020/10/27 2020/12/10 2020/12/10		PRODUCT CUSTOMER DRAWING																																																																																																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING SERIES B-SIZE 41792		DOCUMENT NUMBER SDA-41792																																																																																																			
				MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		REVISION PSD 000 L1																																																																																																			
				SHEET NUMBER 4 OF 8																																																																																																							
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35																																																																																																						
9	8	7	6	5	4	3	2	1																																																																																																			

	10	9	8	7	6	5	4	3	2	1																																																																																																																											
F	41792																																																																																																																																				
	E	OPTIONS	Group	A-41792-0460/0471	Group	A-41792-0472/0483	Group	A-41792-0484/0493	Group	A-41792-0579/0595																																																																																																																											
			Header No:	41790-0007/0018	Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0002/0018																																																																																																																											
			Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0571																																																																																																																											
			Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN	Plating:	154 - TIN																																																																																																																											
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																																																																											
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																																																											
			Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A																																																																																																																											
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																																																											
			PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156																																																																																																																											
			Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL																																																																																																																											
			Voided Ckts	2, 7	Voided Ckts	4, 7	Voided Ckts	2, 5, 9	Voided Ckts	NONE																																																																																																																											
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																																																											
	D	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																																																											
		2							50-29-1904	A-41792-0579																																																																																																																											
		3							50-29-1905	A-41792-0580																																																																																																																											
		4							50-29-1906	A-41792-0581																																																																																																																											
		5							50-29-1907	A-41792-0582																																																																																																																											
6								50-29-1908	A-41792-0583																																																																																																																												
7		41792-0460	A-41792-0460		A-41792-0472			50-29-1909	A-41792-0584																																																																																																																												
8		41792-0461	A-41792-0461	26-60-5087	A-41792-0473			50-29-1910	A-41792-0585																																																																																																																												
9					A-41792-0474		A-41792-0484	50-29-1911	A-41792-0586																																																																																																																												
10		41792-0463	A-41792-0463		A-41792-0475		A-41792-0485	50-29-1912	A-41792-0587																																																																																																																												
C	11	41792-0464	A-41792-0464		A-41792-0476		A-41792-0486	50-29-1913	A-41792-0588																																																																																																																												
	12	41792-0465	A-41792-0465		A-41792-0477	26-60-5128	A-41792-0487	50-29-1914	A-41792-0589																																																																																																																												
	13	41792-0466	A-41792-0466		A-41792-0478		A-41792-0488	50-29-1915	A-41792-0590																																																																																																																												
	14	41792-0467	A-41792-0467		A-41792-0479		A-41792-0489	50-29-1916	A-41792-0591																																																																																																																												
	15	41792-0468	A-41792-0468		A-41792-0480		A-41792-0490	50-29-1917	A-41792-0592																																																																																																																												
	16	41792-0469	A-41792-0469		A-41792-0481		A-41792-0491	50-29-1918	A-41792-0593																																																																																																																												
	17	41792-0470	A-41792-0470		A-41792-0482		A-41792-0492	50-29-1919	A-41792-0594																																																																																																																												
	18	41792-0471	A-41792-0471		A-41792-0483		A-41792-0493	50-29-1920	A-41792-0595																																																																																																																												
B	<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> <td colspan="2" rowspan="2">  </td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6"></td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> <td colspan="6" rowspan="5"> EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03 </td> <td colspan="2">DOCUMENT NUMBER</td> <td>DOC TYPE</td> <td>DOC PART</td> <td>REVISION</td> </tr> <tr> <td></td> <td>MM</td> <td></td> <td>INCH</td> <td colspan="2">SDA-41792</td> <td>PSD</td> <td>000</td> <td>L1</td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> <td>± 0.01</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>0.25</td> <td>± 0.015</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>0.38</td> <td>±</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> <td colspan="2"></td> <td colspan="3"></td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td>DRAWING</td> <td>SERIES</td> <td>MATERIAL NUMBER</td> <td>CUSTOMER</td> <td>SHEET NUMBER</td> </tr> <tr> <td colspan="4">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">  </td> <td>B-SIZE</td> <td>41792</td> <td>SEE TABLE</td> <td>GENERAL MARKET</td> <td>5 OF 8</td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER								MM/IN		1:1								GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		MM		INCH	SDA-41792		PSD	000	L1	4 PLACES	±		±						3 PLACES	±		± 0.01						2 PLACES	±	0.25	± 0.015						1 PLACE	±	0.38	±						0 PLACES	±		±						ANGULAR TOL ± 0.5°				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE	41792	SEE TABLE	GENERAL MARKET	5 OF 8
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																				
	DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																																																
	MM/IN		1:1																																																																																																																																		
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION																																																																																																																						
		MM		INCH							SDA-41792		PSD	000	L1																																																																																																																						
	4 PLACES	±		±																																																																																																																																	
	3 PLACES	±		± 0.01																																																																																																																																	
	2 PLACES	±	0.25	± 0.015																																																																																																																																	
	1 PLACE	±	0.38	±																																																																																																																																	
0 PLACES	±		±																																																																																																																																		
ANGULAR TOL ± 0.5°				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																																																																																																																											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE	41792	SEE TABLE	GENERAL MARKET	5 OF 8																																																																																																																											
A	DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																																																																
	<table border="1"> <tr> <td>9</td> <td>8</td> <td>7</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>1</td> </tr> </table>										9	8	7	6	5	4	3	2	1																																																																																																																		
9	8	7	6	5	4	3	2	1																																																																																																																													


	10	9	8	7	6	5	4	3	2	1							
	41792																
F	E	D	C	B	A	OPTIONS	Group	A-41792-0596/0612	Group	A-41792-0613/0629	Group	A-41792-0484/0493	Group	A-41792-0653			
							Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0009/0018	Header No:	41790-0005/0018			
							Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0570			
							Plating:	154 - TIN	Plating:	154 - TIN	Plating:	154 - TIN	Plating:	228 - 30 GOLD			
							Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100			
							Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450			
							Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	6.86/ .270			
							Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213			
							PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96/ .156			
							Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	5.08/ .200			
							Voided Ckts	2, 7	Voided Ckts	2, 5, 9	Voided Ckts	2, 5, 9	Voided Ckts	2, 5			
							Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002			
							Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number		
							2										
							3										
							4										
							5										
							6							41792-0653	A-41792-0653		
7	50-29-1926	A-41792-0601															
8	50-29-1927	A-41792-0602															
9	50-29-1928	A-41792-0603	50-29-1945	A-41792-0620		A-41792-0630											
10	50-29-1929	A-41792-0604	50-29-1946	A-41792-0621		A-41792-0631											
11	50-29-1930	A-41792-0605	50-29-1947	A-41792-0622		A-41792-0632											
12	50-29-1931	A-41792-0606	50-29-1948	A-41792-0623	41792-0633	A-41792-0633											
13	50-29-1932	A-41792-0607	50-29-1949	A-41792-0624		A-41792-0634											
14	50-29-1933	A-41792-0608	50-29-1950	A-41792-0625		A-41792-0635											
15	50-29-1934	A-41792-0609	50-29-1951	A-41792-0626		A-41792-0636											
16	50-29-1935	A-41792-0610	50-29-1952	A-41792-0627		A-41792-0637											
17	50-29-1936	A-41792-0611	50-29-1953	A-41792-0628		A-41792-0638											
18	50-29-1937	A-41792-0612	50-29-1954	A-41792-0629		A-41792-0639											
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
						DIMENSION UNITS: MM/IN SCALE: 1:1 GENERAL TOLERANCES (UNLESS SPECIFIED): 4 PLACES ± .015 3 PLACES ± .01 2 PLACES ± 0.25 ± 0.015 1 PLACE ± 0.38 ± .015 0 PLACES ± .015 ANGULAR TOL ± 0.5° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CURRENT REV DESC: OBSOLETE PART NUMBER		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING							
						EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA INITIAL REVISION: DRWN: JSCHAFFER APPR: MARGULIS		2020/10/27 2020/12/10 2020/12/10				DOCUMENT NUMBER: SDA-41792 DOC TYPE: PSD DOC PART: 000 REVISION: L1					
						THIRD ANGLE PROJECTION		DRAWING: B-SIZE		SERIES: 41792		MATERIAL NUMBER: SEE TABLE		CUSTOMER: GENERAL MARKET		SHEET NUMBER: 6 OF 8	
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35												
	9	8	7	6	5	4	3	2	1								
<small> FORMAT: Eng-16ga-master-ib-prod-B REVISION: E DATE: 2020/11/4 </small>																	

		41792															
OPTIONS	Group	A-41792-0667	Group	A-41792-0677	Group	A-41792-0690	Group	A-41792-0698									
	Header No:	41790-0009/0018	Header No:	41790-0011/0018	Header No:	41790-0006/0018	Header No:	41790-0013/0018									
	Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0572									
	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	197 - TIN									
	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100									
	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450									
	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	N/A									
	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213									
	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156									
	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	OVERALL									
	Voided Ckts	2, 3, 5, 6, 8, 9	Voided Ckts	7, 9, 11	Voided Ckts	2, 4, 6	Voided Ckts	2, 6, 11, 13									
	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002									
	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number								
2																	
3																	
4																	
5																	
6																	
7																	
8																	
9																	
10	41792-0667	A-41792-0667															
11																	
12			41792-0677	A-41792-0677	41792-0690	A-41792-0690											
13																	
14							41792-0698	A-41792-0698									
15																	
16																	
17																	
18																	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS MM/IN		SCALE 1:1		CURRENT REV DESC: OBSOLETE PART NUMBER						KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS	
GENERAL TOLERANCES (UNLESS SPECIFIED)											
	MM		INCH	EC NO: 650267				DOCUMENT NUMBER		DOC TYPE DOC PART REVISION	
4 PLACES	±			DRWN: SKANDB 2020/10/27				SDA-41792		PSD 000 L1	
3 PLACES	±		0.01	CHK'D: GGA 2020/12/10							
2 PLACES	±	0.25	± 0.015	APPR: GGA 2020/12/10				PRODUCT CUSTOMER DRAWING			
1 PLACE	±	0.38	±	INITIAL REVISION:				MATERIAL NUMBER		CUSTOMER	
0 PLACES	±			DRWN: JSCHAFFER 11-07-03				SEE TABLE		GENERAL MARKET	
ANGULAR TOL ± 0.5°				THIRD ANGLE PROJECTION		DRAWING		SERIES		SHEET NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE		41792		7 OF 8	

41792

OPTIONS	Group	A-41792-0704	Group		Group		Group	
	Header No:	41790-0005/0018	Header No:		Header No:		Header No:	
	Pin No:	43294-0572	Pin No:		Pin No:		Pin No:	
	Plating:	197 - TIN	Plating:		Plating:		Plating:	
	Pin Length L	27.94 / 1.100	Pin Length L		Pin Length L		Pin Length L	
	Mating M	11.43 / .450	Mating M		Mating M		Mating M	
	Gold Loc G	N/A	Gold Loc G		Gold Loc G		Gold Loc G	
	Height Y	5.41 / .213	Height Y		Height Y		Height Y	
	PC Tail P	3.96/ .156	PC Tail P		PC Tail P		PC Tail P	
	Tin Loc T	OVERALL	Tin Loc T		Tin Loc T		Tin Loc T	
	Voided Ckts	2, 3, 5	Voided Ckts		Voided Ckts		Voided Ckts	
	Pack Per	PK-41792-002	Pack Per		Pack Per		Pack Per	
	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No
2								
3								
4								
5								
6	41792-0704	A-41792-0704						
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	± 0.25		± 0.015						
1 PLACE	± 0.38		±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				EC NO: 650267		2020/10/27		2020/12/10	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
				B-SIZE		41792		MATERIAL NUMBER	
								CUSTOMER	
								SEE TABLE	
								GENERAL MARKET	
								SHEET NUMBER	
								8 OF 8	